

PAGE **1/3**	ISSUE 21-09-26E	SERIES **ANTENNA**	PART NUMBER **R380300038**

Scale 3 : 2

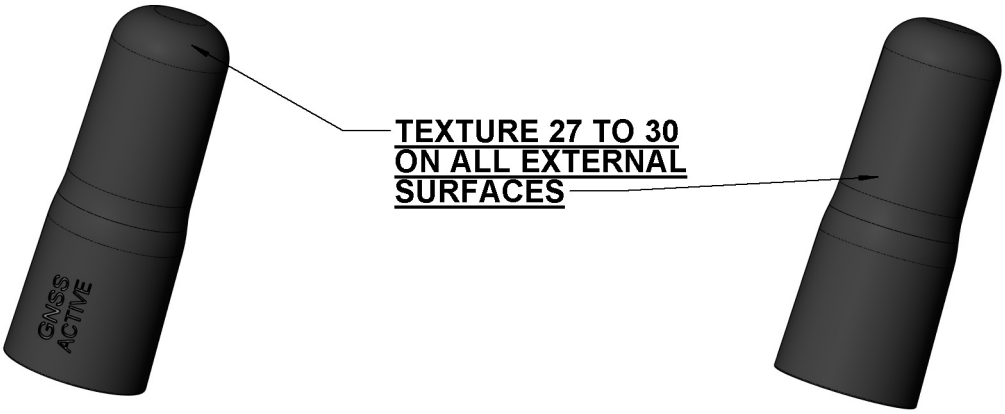

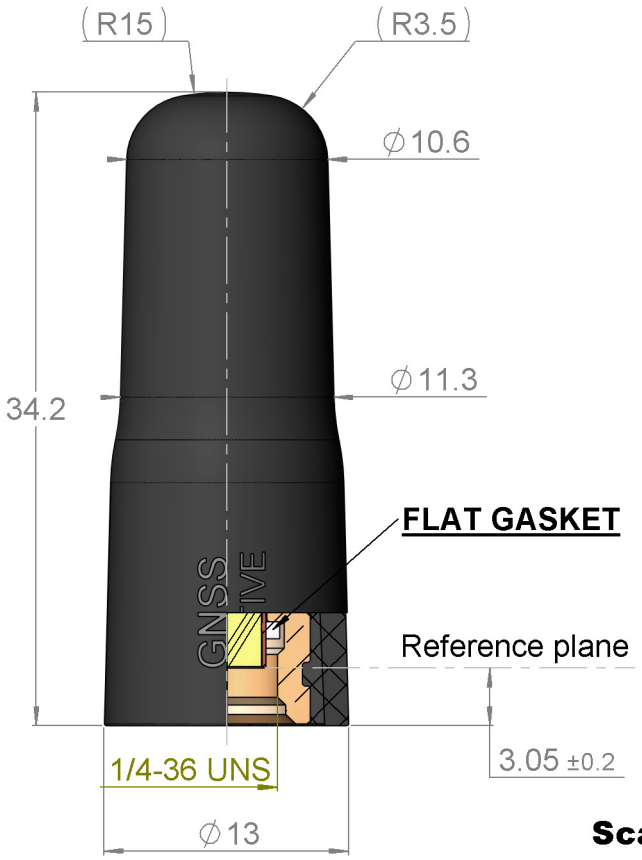

Scale 2.5 : 1

All dimensions are in mm. Tolerances according ISO 2768 m-H

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.

ELECTRICAL CHARACTERISTICS

Frequencies Range :	**GALILEO E1 - GPS L1 (1559-1591)**	MHz
	GLONASS (1597-1607)	MHz
Nominal Impedance :	**50**	Ω
VSWR :	**2.5:1**	Typ.
Typical gain :	**10**	dBic

Electrical performance are defined and tested according to a metallic ground plan where the antenna is installed on

Radiation pattern:	**Dipolar**	
Polarization :	**Linear vertical**	
Output P1 dB	**8**	dBm
Noise Figure (LNA alone)	**0.55**	dB
Supply Voltage	**3**	V typ.
	2.0	V min
	3.5	V max
Supply Current	**3.8**	mA typ
Connector type :	**Male SMA**	

MECHANICAL CHARACTERISTICS

Antenna color :	**BLACK**	
Radome material :	**Polyamide**	
Radome texture :	**Charmille 27-30**	
Overall length :	**34.2**	mm
Weight (±15%)	**6**	g

ENVIRONMENTAL CHARACTERISTICS

Operating temperature :	**-40/+71** **MIL-STD-810G, Methods 501.5 & 502.5, Proc. II**	° C
Storage temperature :	**-40/+85** **MIL-STD-810G, Methods 501.5 & 502.5, Proc. I**	° C
Humidity (Non-condensing) :	**95%** **Through Op. Temp range** **MIL-STD-810G, Meth 507.5 Proc. II**	Relative Humidity
Immersion (mated)	**1** **2**	m Hours
Solar Radiation	**MIL-STD-810G, Meth 505.5, Procedures II**	1120 W/m²
Salt Fog	**MIL-STD-810G, Meth 509.5** **4 x 24 h**	

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.

ELECTRICAL PERFORMANCES

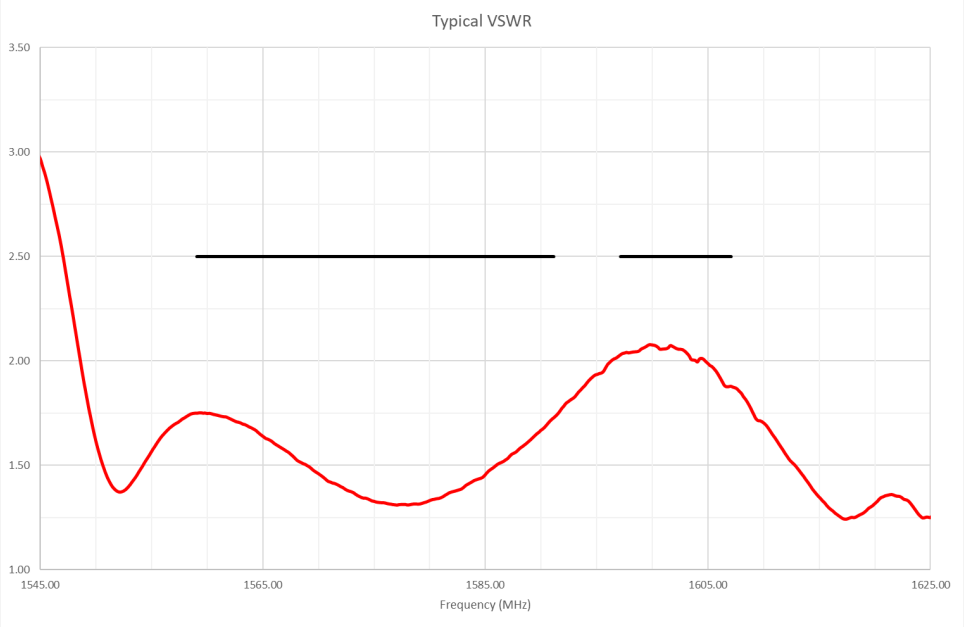


Figure 1: VSWR

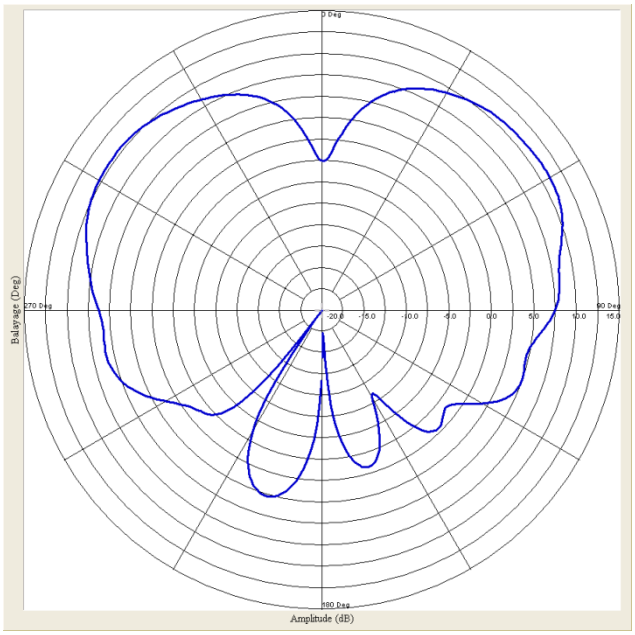


Figure 2: Radiation pattern on ground plane at 1575 MHz (RHCP)

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from Radiall. The data defined in this document are given as an indication, in the effort to improve our products; we reserve the right to make any changes judged necessary.