


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	02/03/11	A.D.M.

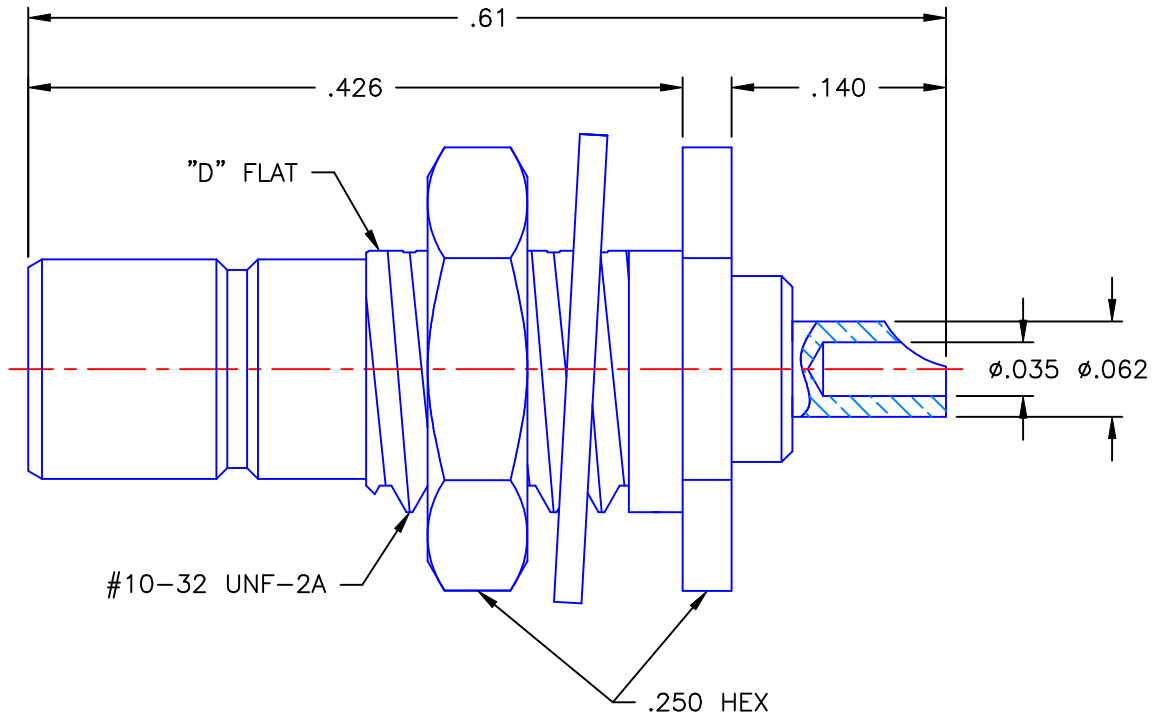


NOTES: CONFORMS TO MIL-C-39012/71-0001

MATERIALS:

1. INSULATOR = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
2. LOCKWASHER = PHOSPHOR BRONZE PER ASTM B139, COPPER ALLOY C53400, TEMPER H04.
3. ALL OTHER METAL PARTS = BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.

FINISHES:

1. BODY = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER .0001 TO .0002 COPPER STRIKE PER MIL-C-14550.
2. CONTACT = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.
3. NUT & LOCKWASHER = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 0, GRADE C, OVER .00010 TO .00020 COPPER STRIKE PER MIL-C-14550.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON		DWN:	DATE	 Property of Radial This document cannot be reproduced or communicated to a third party without prior written permission of RADIALL.			
		A.D.M.	02/03/11				
DECIMAL	ANGLE	CHKD:	DATE				
		D.N.	02/03/11	SMB STRAIGHT MALE JACK BULKHEAD MOUNT SOLDER POT RECEPTACLE			
		APVD:	DATE				
		J.M.	02/03/11				
REFERENCE:		MATERIALS & FINISHES:		SIZE	FSCM NO.	DWG NO.	REV
		SEE NOTES		A	19505	2004-1511-999	A
ORIGINATOR: A.D.M. DATE: 02/03/11				SCALE	8:1	THIRD ANGLE PROJECTION	SHEET 1 OF 1

2004-1511-999