


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	08/20/15	D.N.



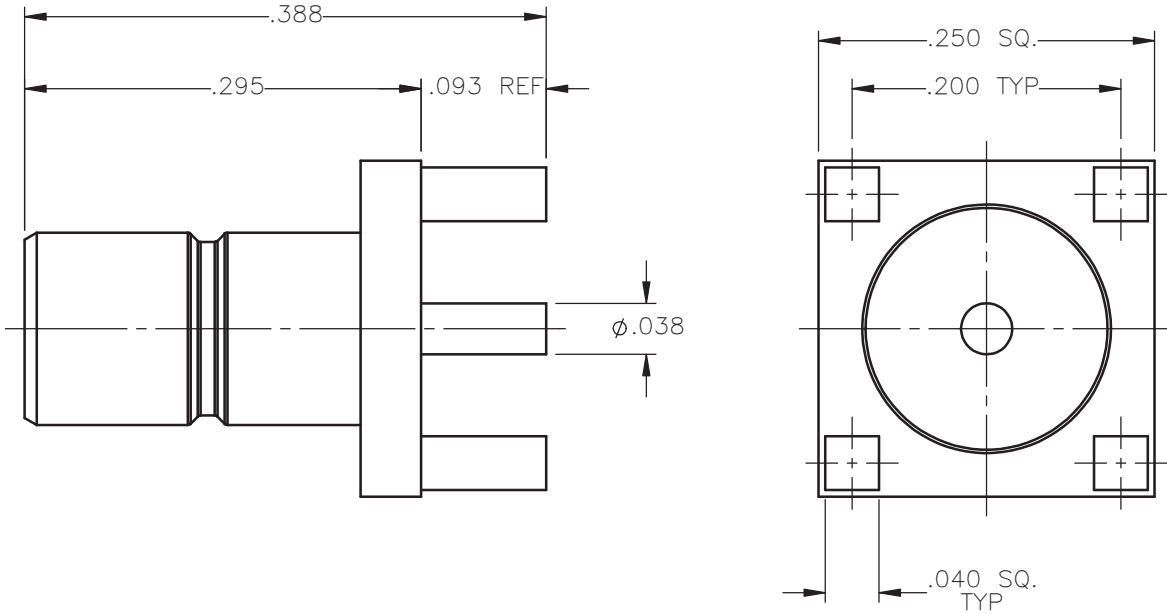

NOTES: CONFORMS TO M39012/95-0006

MATERIALS:

1. BODY & CONTACT = BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.
2. INSULATOR = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".

FINISHES:

1. BODY = SILVER PLATE PER QQ-S-365, TYPE III, GRADE A, 200 TO 300 μ in THICK OVER COPPER FLASH PER MIL-C-14550, 10 TO 30 μ in THICK, TREAT WITH TARNABAN.
2. CONTACT = GOLD PLATE PER ASTM B488-01, TYPE II, 50 μ in MIN, GRADE C, OVER 100 TO 200 μ in STRESS FREE SULFAMATE NICKEL PER QQ-N-290.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON	DWN:	DATE	 Property of Radiall This document cannot be reproduced or communicated to a third party without prior written permission of RADIALL.			
	D.N.	08/20/15				
DECIMAL	ANGLE	CHKD:	DATE	SMB STRAIGHT MALE JACK P.C.B. MOUNT RECEPTACLE		
		J.S.	08/20/15			
		APVD:	DATE			
		J.M.	08/20/15			
REFERENCE:	MATERIALS & FINISHES:		SIZE	FSCM NO.	DWG NO.	REV
ORIGINATED: D.N. DATE: 08/20/15	SEE NOTES		A	19505	2009-6511-799	A
			SCALE 7:1	THIRD ANGLE PROJECTION		SHEET 1 OF 1

2009-6511-799