


Series
MMC

Twinax pin contact for twist
pair cable AWG 26


Issue:
Feb. 24, 2014

Page
1/1


Composition :

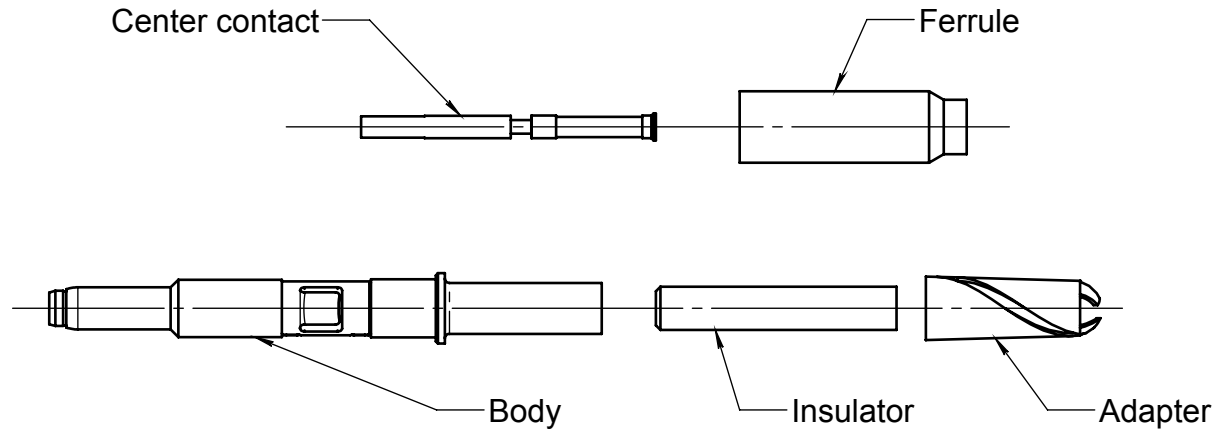

Cable stripping :

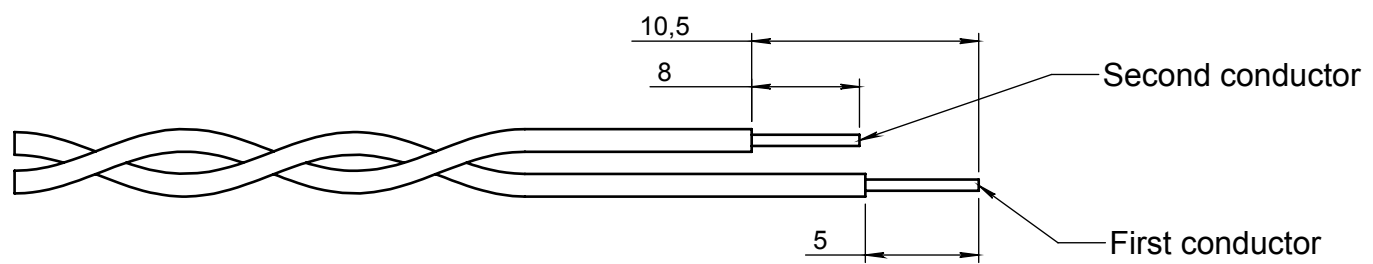


Assembly :

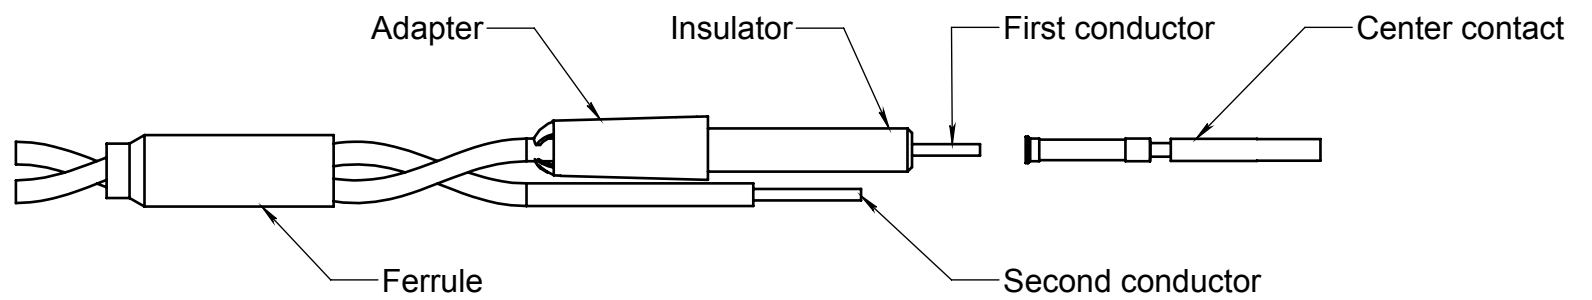

Crimp center contact on first conductor
Crimping tool : RADIALL 282 281
Positioner : RADIALL 282 981 - Selector position 2

Insert the center contact in body up to until it snaps
Slide the adapter on body
Insert the second conductor in the adapter slot
Slide the ferrule on adapter
Crimp the ferrule
Crimping tool : RADIALL 282 292
Positioner : RADIALL 282 973
Extraction tool : RADIALL 282 920

DIMENSIONS : mm (inch are given for information only)



CREATION				
PEN:				
NOM: LENUZZA				
DATE: 11/05/81	Feb. 24, 2014	Document on new support		
APPR.:	May. 11, 1981	Creation document	/	/
	Issue	Revisions	Name	Approved

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from RADIALL. This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112_9311