


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	04/25/18	C.E.



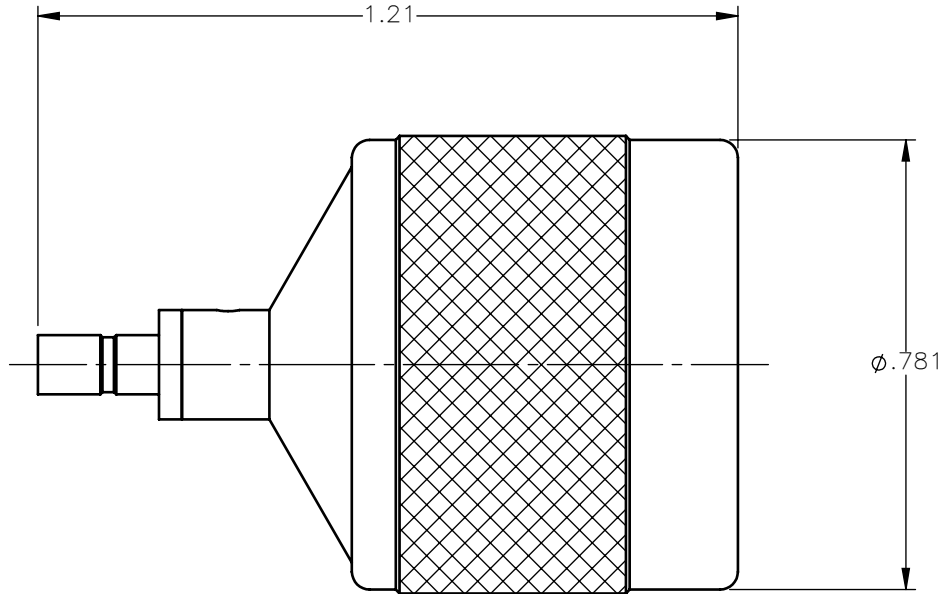

NOTES:

MATERIALS:

1. INSULATORS = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
2. CONTACTS & SLEEVE = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04.
3. WASHER = PHOSPHOR BRONZE PER ASTM B139, COPPER ALLOY C53400, TEMPER H04.
4. GASKET = DOW CORNING SILASTIC 250, SILICONE RUBBER 45-55 DUROMETER.
5. ALL OTHER METAL PARTS = STAINLESS STEEL PER ASTM A582, ALLOY 303, CONDITION "A".

FINISHES:

1. CONTACTS & SLEEVE = GOLD PLATE PER ASTM B488-01, TYPE II, 50 $\mu$ in MIN, GRADE C, OVER 100 TO 200 $\mu$ in STRESS FREE SULFAMATE NICKEL PER QQ-N-290.
2. COUPLING NUT = PASSIVATE PER SAE-AMS-2700
3. SUB-ASSEMBLY = GOLD PLATE PER ASTM B488-11, TYPE II, 30 $\mu$ in MIN, GRADE C, OVER 50 TO 100 $\mu$ in STRESS FREE NICKEL PER AMS-QQ-N-290.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON	DWN: C.E.	DATE 04/25/18	 Property of Radiall This document cannot be reproduced or communicated to a third party without prior written permission of RADIALL.			
	CHKD: D.N.	DATE 04/25/18				
DECIMAL	ANGLE	APVD: J.M.	<b>SSMB JACK TO TYPE "N" PLUG ADAPTER</b>			
		DATE 04/25/18				
REFERENCE:	MATERIALS & FINISHES:		SIZE A	FSCM NO. 19505	DWG NO. 5011-1503-000	REV A
ORIGINATED: C.E. DATE: 04/25/18	SEE NOTES		SCALE 2:1	THIRD ANGLE PROJECTION		SHEET 1 OF 1

5011-1503-000