


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	12/30/02	A.D.M.
A	ECO #6147	02/22/06	A.D.M.

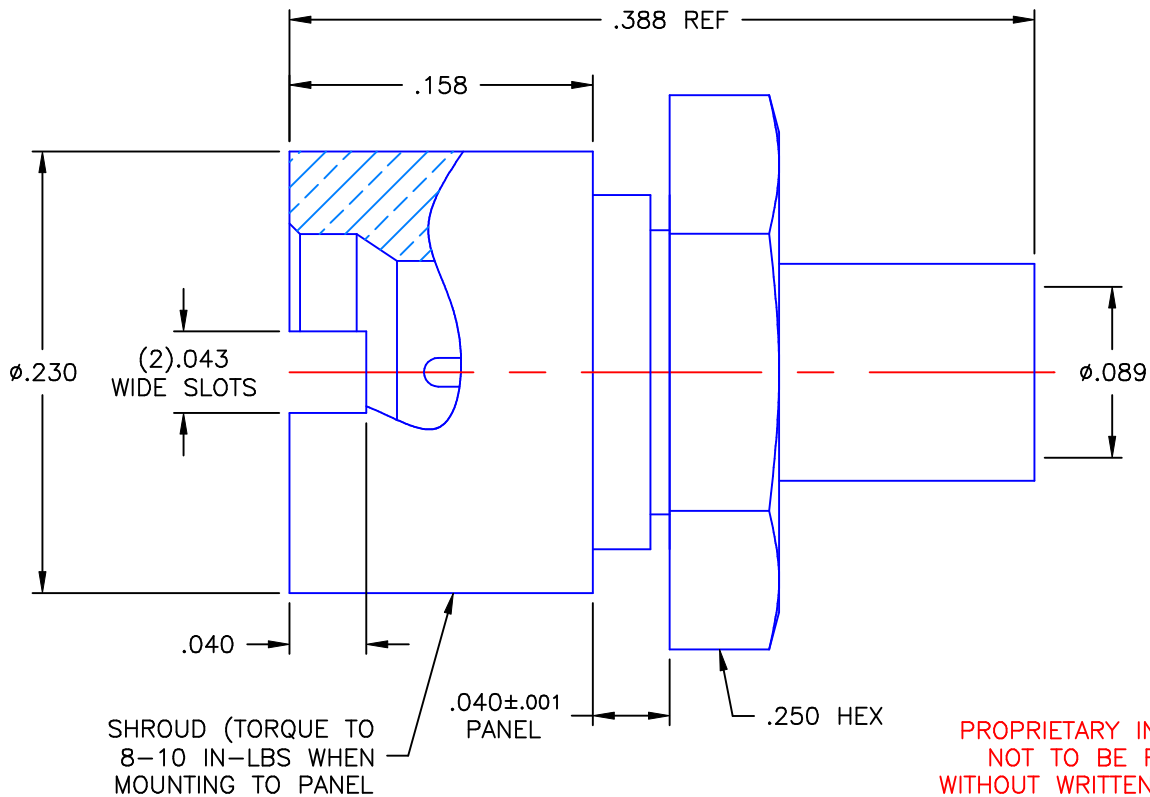

PROPRIETARY INFORMATION
NOT TO BE RELEASED
WITHOUT WRITTEN PERMISSION
FROM AN AUTHORIZED
REPRESENTATIVE OF
APPLIED ENGINEERING PRODUCTS


NOTES:

MATERIALS:

1. FRONT INSULATOR = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
2. INSULATOR = TORLON POLYAMIDE-IMIDE TYPE 4203 PER ASTM D5204.
3. ALL OTHER METAL PARTS = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04.

FINISHES:

1. ALL METAL PARTS = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON		DWN: A.D.M.	DATE: 12/20/02	 APPLIED ENGINEERING PRODUCTS 104 John W. Murphy Dr. New Haven, CT 06513
		CHKD: D.N.	DATE: 12/30/02	
DECIMAL	ANGLE	APVD: G.A.T.	DATE: 12/30/02	
SMP STRAIGHT MALE FULL DETENT BULKHEAD MOUNT DIRECT SOLDER TYPE FOR .086 S/R & SIMILAR CABLES				
REFERENCE: 357-7591-020 ORIGINATOR: A.D.M. DATE: 12/20/02		MATERIALS & FINISHES: SEE NOTES		SIZE: A FSCM NO.: 19505 DWG NO.: 7503-1582-010 SCALE: 10:1 THIRD ANGLE PROJECTION
				REV: A SHEET 1 OF 1

7503-1582-010