


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	09/12/03	A.D.M.

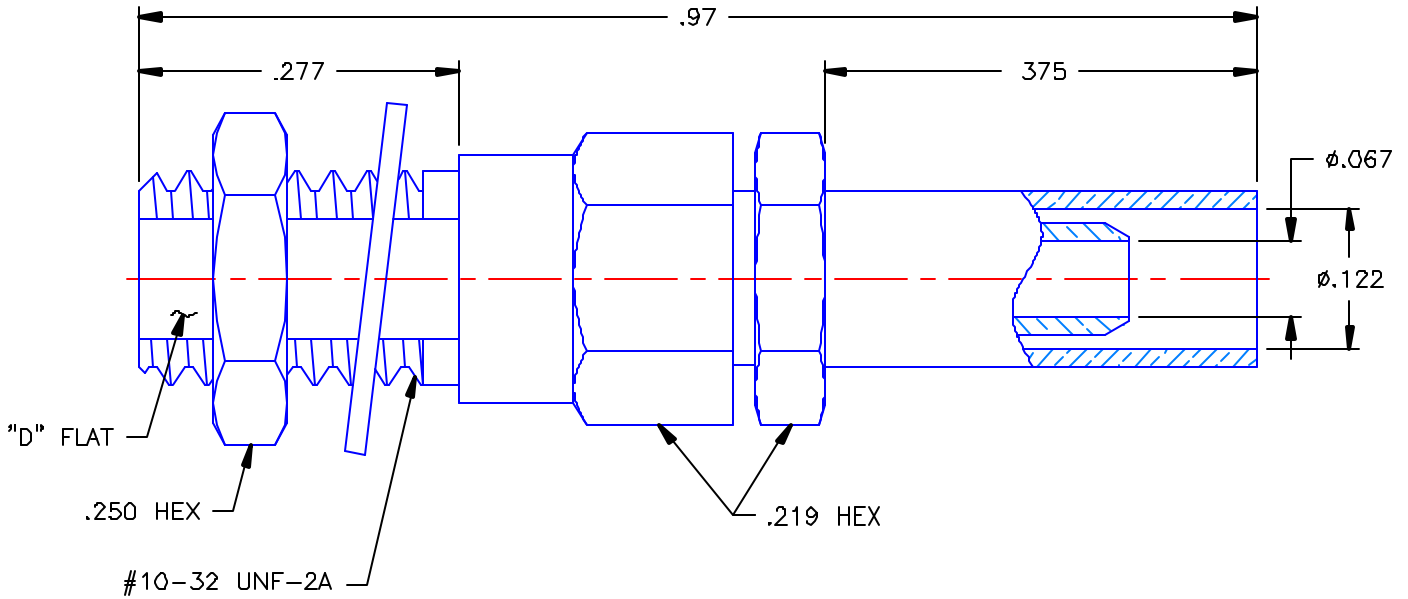

PROPRIETARY INFORMATION  
 NOT TO BE RELEASED  
 WITHOUT WRITTEN PERMISSION  
 FROM AN AUTHORIZED  
 REPRESENTATIVE OF  
 APPLIED ENGINEERING PRODUCTS


**NOTES:**

**MATERIALS:**

1. LOCKWASHER = PHOSPHOR BRONZE PER ASTM B139, COPPER ALLOY C53400, TEMPER H04.
2. CRIMP SLEEVE = SEAMLESS LOWLEAD BRASS TUBE, ALLOY 330, SOFT ANNEAL TEMPER, .025/.060 GRAIN SIZE OR SEAMLESS COPPER TUBE PER ASTM B75, TYPE C12000, TEMPER: LIGHT ANNEAL Q50 EXCEPT YIELD STRENGTH.
3. ALL OTHER METAL PARTS = BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.

**FINISHES:**

1. ALL METAL PARTS = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS O, GRADE C, OVER .00010 TO .00020 COPPER STRIKE PER MIL-C-14550.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON		DWN. DATE	 <b>APPLIED ENGINEERING PRODUCTS</b> 104 John W. Murphy Dr. New Haven, CT 06513
		A.D.M. 09/10/03	
DECIMAL	ANGLE	CHKD: DATE	<b>STRAIGHT BULKHEAD MOUNT          CABLE FEEDTHROUGH TERMINATION          CRIMP TYPE FOR RG-316 CABLE</b>
		D.N. 09/12/03	
REFERENCE:		APVD: DATE	SIZE FSCM NO DWG. NO. REV A 19505 8021-1071-003 -
		D.J.C. 09/12/03	
ORIGINATOR: A.D.M. DATE: 09/10/03		MATERIALS & FINISHES: SEE NOTES	SCALE 6:1
			SHEET 1 OF 1

8021-1071-003