
	-
	\cup
	$\overline{}$
	9003
	_
	9
	2
тм	$ \cdot $
	١,
	5
_	5
	00
	$\overline{}$
	IV.



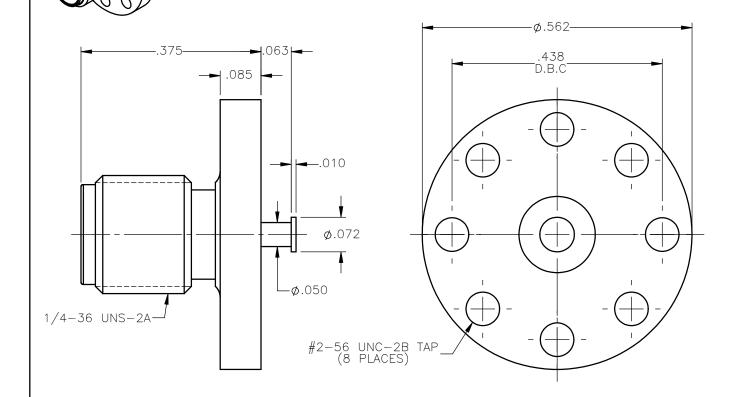

NOTES:

MATERIALS:

- 1. BODY = STAINLESS STEEL PER ASTM A582, ALLOY 303, CONDITION "A".
 2. INSULATOR = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
 3. CONTACT = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04.

FINISHES:

- BODY = PASSIVATE PER QQ-P-35, TYPE VI.
 CONTACT = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.

UNLESS OTHERWISE SPECI DIMENSIONS ARE IN INCH TOLERANCES ON	IFIED HES	D.N. 10/	ATE 12/12 ATE		_	Property of Radial This document cannot be repro- communicated to a third party written permission of RADIALL.	duced or 🏉	
DECIMAL AND	GLE	J.S. 10/	12/12					
	Ī	APVD: D.	ATE	TO STRIPLINE				
		J.M. 10/	12/12	NON—CAPTIVE CONTACT				
REFERENCE:		MATERIALS & FINISHES:		SIZE	FSCM NO.	DWG NO.		REV
ORIGINATED: D.N. DATE: 10/12/12		SEE NOTES		А	19505	9003-9213	-002	А
				SCALE 5:1		THIRD ANGLE PROJECTION	SHEET 1 O	F 1