


PROPRIETARY INFORMATION
 NOT TO BE RELEASED
 WITHOUT WRITTEN PERMISSION
 FROM AN AUTHORIZED
 REPRESENTATIVE OF
 APPLIED ENGINEERING PRODUCTS

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/19/08	D.N.

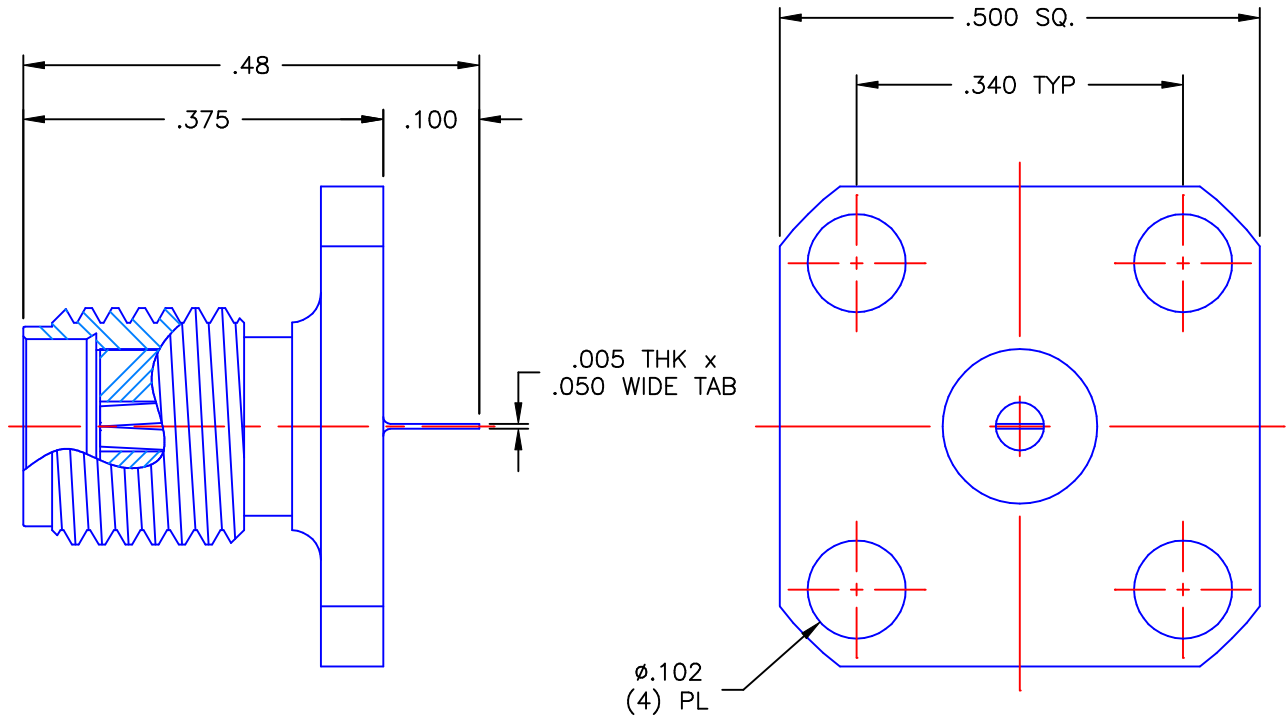


NOTES:

MATERIALS:

1. BODY = STAINLESS STEEL PER ASTM A582, ALLOY 303, CONDITION "A".
2. INSULATOR = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
3. CONTACT = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04.

FINISHES:

1. BODY = PASSIVATE PER QQ-P-35, TYPE VI.
2. CONTACT = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON	DWN:	DATE	 APPLIED ENGINEERING PRODUCTS 104 John W. Murphy Dr. New Haven, CT 06513
	D.N.	05/19/08	
DECIMAL	ANGLE	CHKD:	SMA STRAIGHT JACK (4) HOLE FLANGE MOUNT TAB CONTACT RECEPTACLE
		A.D.M.	
		APVD:	DATE
		J.M.	05/19/08
REFERENCE:	MATERIALS & FINISHES:		SIZE
ORIGINATOR: D.N. DATE: 05/19/08	SEE NOTES		A
			FSCM NO.
			19505
			DWG NO.
			9104-9113-000
			REV
			A
			SCALE
			5:1
			THIRD ANGLE PROJECTION
			SHEET 1 OF 1

9104-9113-000