


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/18/10	D.N.

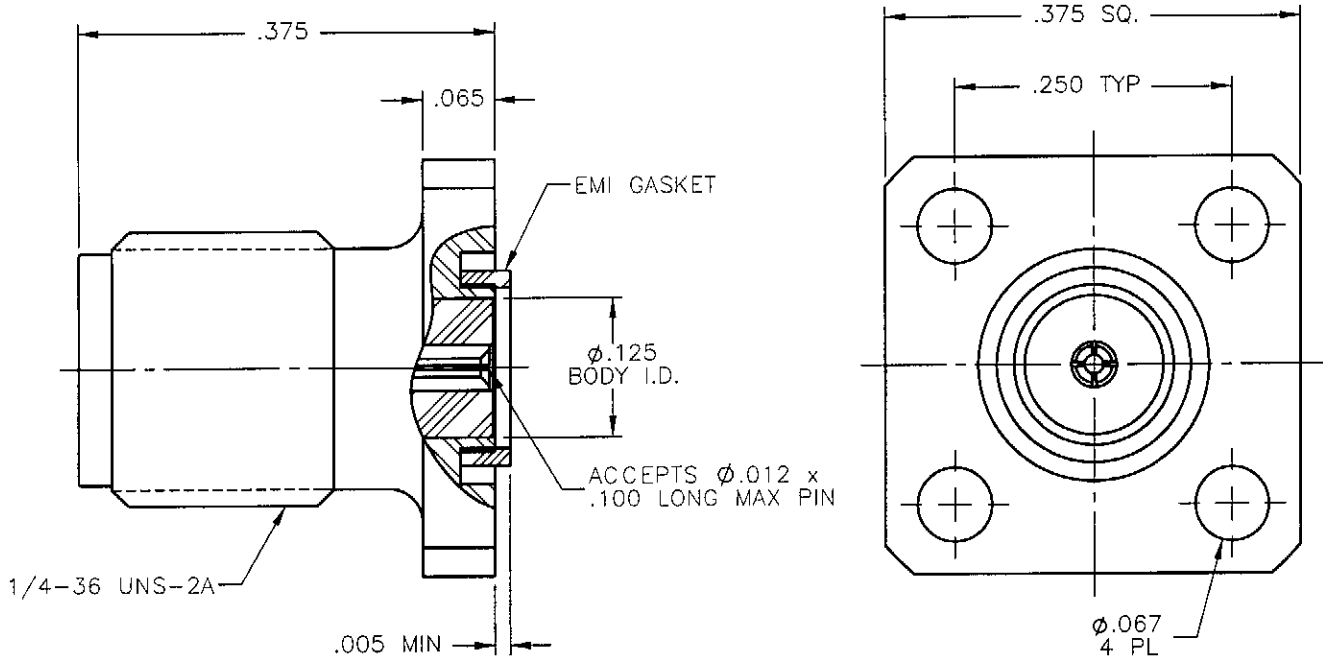


NOTES:

MATERIALS:


1. BODY = STAINLESS STEEL PER ASTM A582, ALLOY 303, CONDITION "A".
2. INSULATOR = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
3. CONTACT = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04.
4. GASKET = CONDUCTIVE SILVER/SILICONE ELASTOMERS 70 DUROMETER.

FINISHES:

1. BODY = PASSIVATE PER QQ-P-35, TYPE VI.
2. CONTACT = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON	DWN: DATE D.N. 05/18/10	 Property of Radiall This document cannot be reproduced or communicated to a third party without prior written permission of RADIALL.
	CHKD: DATE A.D.M. 05/18/10	
DECIMAL	ANGLE	SMA STRAIGHT JACK 3/8 SQUARE (4) HOLE FLANGE HERMETIC SEAL LAUNCHER
REFERENCE:	MATERIALS & FINISHES: SEE NOTES	SIZE A FSCM NO. 19505 DWG NO. 9279-9513-000 REV A SCALE 6:1 THIRD ANGLE PROJECTION SHEET 1 OF 2

9279-9513-000

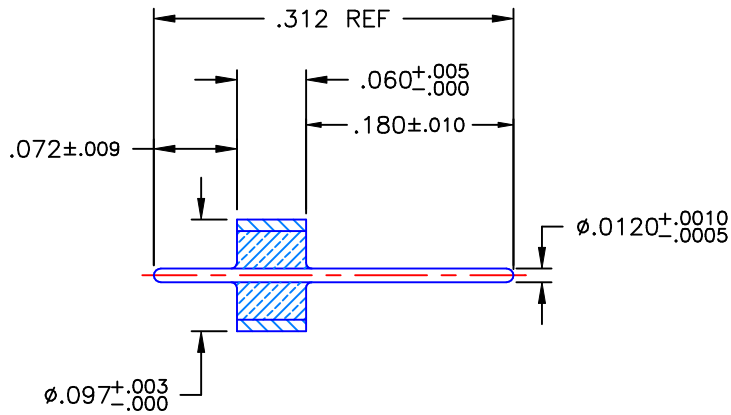


NOTES:

1. MATERIALS:

OUTER RING AND PIN = KOVAR
GLASS BEAD = CORNING 7052

2. FINISH:

OUTER RING AND PIN = GOLD PLATE PER MIL-45204, TYPE II, GRADE C, CLASS I,
OVER NICKEL PER MIL-C-26074, CLASS I, OVER COPPER PER MIL-C-14550.

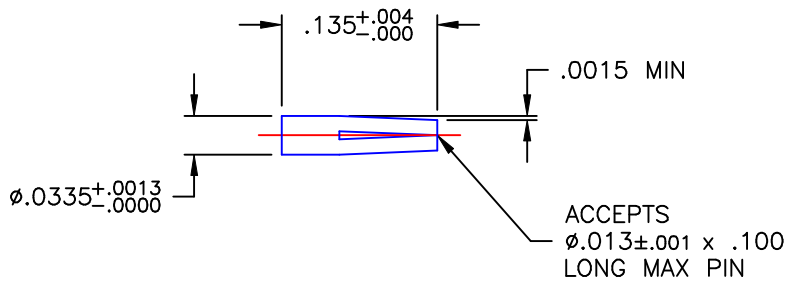

MATERIAL: BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04.

FINISH: GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER
.00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ON

REFERENCE:



Property of Radiall

This document cannot be reproduced or
communicated to a third party without prior
written permission of RADIALL.

DECIMAL

ANGLE

SIZE
A

FSCM NO.
19505

DWG NO.
9279-9513-000

REV
A

SCALE 6:1

THIRD ANGLE
PROJECTION

SHEET 2 OF 2

9279-9513-000