


STRAIGHT PLUG CLAMP TYPE CABLE 2/50 D	R114.003.420 SERIES SMB
--	-----------------------------------

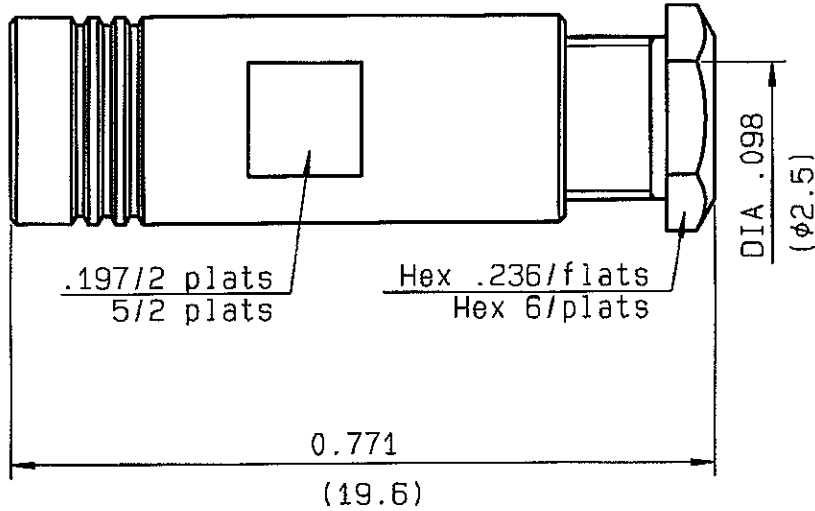

NOMINAL IMPEDANCE	50 Ω
FREQUENCY RANGE	0-4 GHz
TEMPERATURE RATING	-65/+165 °C
V.S.W.R	1.30 + .04 x F(GHz)Maxi
RF INSERTION LOSS	0.25 \sqrt{F} (GHz) dB Maxi
VOLTAGE RATING	250 Veff Maxi
DIELECTRIC WITHSTANDING VOLTAGE	750 Veff Mini
INSULATION RESISTANCE	1000 M Ω Mini
HERMETIC SEAL	NA Atm.cm ³ /s
LEAKAGE (pressurized only)	NA
MECHANICAL DURABILITY	500 Cycles
WEIGHT	gr
SPECIFICATION	

CABLES : TS 2619

PACKAGING		
Standard	Unit	Other
100	'W' option	Contact us

OTHERS CHARACTERISTICS

	R-A-S
CABLE RETENTION	58 N Mini
CENTER CONTACT RETENTION	
Axial force - mating end	10 N Mini
Axial force - opposite end	10 N Mini
Torque	NA cm.N Mini
RECOMMENDED TORQUES	
Mating	NA cm.N
Panel nut	NA cm.N
Clamp nut	40 cm.N

CONNECTOR PARTS	MATERIALS	FINISH
		(all values are given in micrometers)
BODY	BRASS	GOLD 0.2 OVER NICKEL 2
OUTER CONTACT	BERYLLIUM COPPER	GOLD 0.5 OVER NICKEL 2
CENTER CONTACT	BERYLLIUM COPPER	GOLD 1.3 OVER NICKEL 2
INSULATOR	PTFE	-
GASKET		-
OTHERS PIECES	BRASS	GOLD 0.2 OVER NICKEL 2

TRIPPIER

ISSUE 0701 E	CREATION DATE 20/05/1992	FILE PART-NUMBER 91-0019-003
------------------------	------------------------------------	--



The information given here is subject to change without notice.
Design changes may be in order to improve the product.

Connect to the future

