
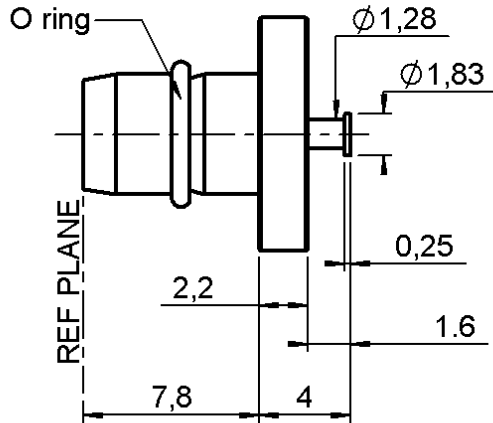



SPECIAL FLANGE PLUG RECEPTACLE
WITH SHOULDER CONTACT

R128.545.011



Series : BMA

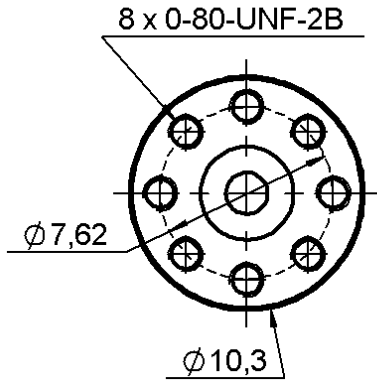

PANEL CUT OUT

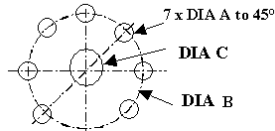

	mm	
	Maxi	mini
A	2.3	2.1
B	7.63	7.62
C	1.65	1.45

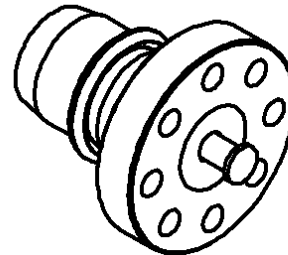

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATINGS (µm)
BODY	STAINLESS STEEL	PASSIVATED .
CENTER CONTACT	BRASS	GOLD 1.3 OVER NICKEL 2
OUTER CONTACT	-	-
INSULATOR	PTFE	-
GASKET	-	-
OTHERS PARTS	-	-
-	-	-
-	-	-

Issue : 0403 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



**SPECIAL FLANGE PLUG RECEPTACLE
WITH SHOULDER CONTACT**

R128.545.011

Series : **BMA**

PACKAGING

SPECIFICATION

Standard	Unit	Other
100	-	Contact us

ELECTRICAL CHARACTERISTICS

ENVIRONMENTAL

Impedance		50 Ω
Frequency		0-22 GHz
VSWR	1.25 +	0.000 x F(GHz) Maxi
Insertion loss		0.07 √F(GHz) dB Maxi
RF leakage	- (NA - F(GHz)) dB Maxi
Voltage rating		500 Veff Maxi
Dielectric withstanding voltage		1500 Veff mini
Insulation resistance		5000 MΩ mini

Operating temperature	-65/+125 ° C
Hermetic seal	NA Atm.cm3/s
Panel leakage	NA

OTHERS CHARACTERISTICS

Assembly instruction **NA**

Others :
* de 0 -10 Ghz

MECHANICAL CHARACTERISTICS

Center contact retention		
Axial force – Mating end	NA	N mini
Axial force – Opposite end	NA	N mini
Torque	NA	N.cm mini

Recommended torque		
Mating	NA	N.cm
Panel nut	NA	N.cm

Mating life	1000	Cycles mini
Weight	0.000	g

Issue : 0403 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

