

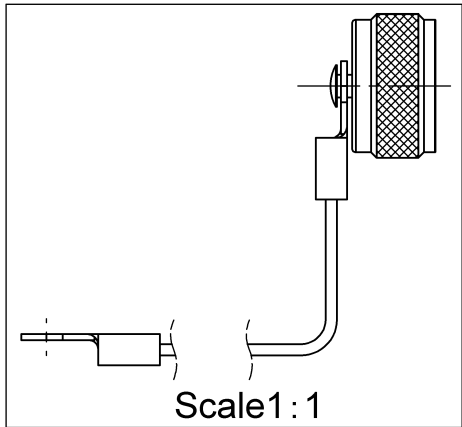
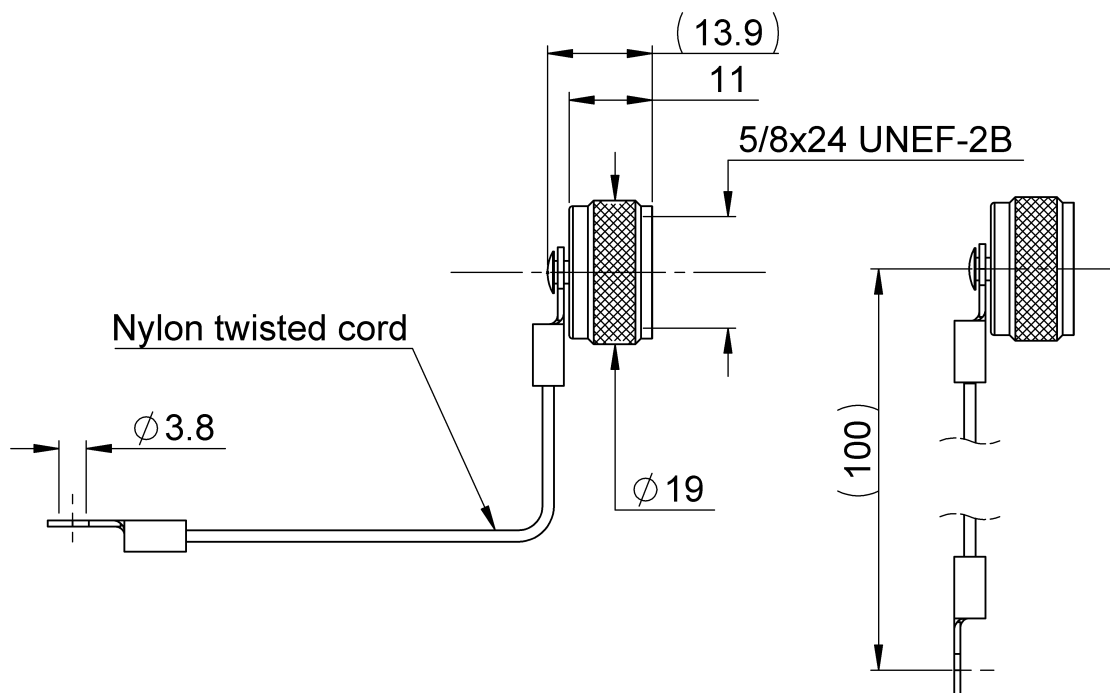


PAGE 1/2	ISSUE 26-06-26E	SERIES N	PART NUMBER R161804000
----------	--------------------	----------	------------------------



All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (μm)
Body	BRASS	BBR
Center contact		
Outer contact		
Insulator		
Gasket	CHLOROPRENE	
Others parts	BRASS	BBR
-	-	-
-	-	-

PAGE 2/2

ISSUE
26-06-26E

SERIES **N**

PART NUMBER **R161804000**

PACKAGING

Standard	Unit	Other
50	Contact us	Contact us

ELECTRICAL CHARACTERISTICS

Impedance	NA	Ω
Frequency	NA	GHz
VSWR	NA +	0 x F(GHz) Maxi
Insertion loss	NA	$\sqrt{F}$ (GHz) dB Maxi
RF leakage	- (	NA - F(GHz)) dB Maxi
Voltage rating	NA	Veff Maxi
Dielectric withstanding voltage	NA	Veff mini
Insulation resistance	NA	M Ω mini

MECHANICAL CHARACTERISTICS

Center contact retention		
Axial force – Mating End	NA	N mini
Axial force – Opposite end	NA	N mini
Torque	NA	N.cm mini

Recommended torque		
Mating	130	N.cm
Panel nut	NA	N.cm

Mating life	500	Cycles mini
Nominal Weight	11	g
(Add +15% for max weight)		

ENVIRONMENTAL

Operating temperature	-40/+100	°C
Hermetic seal	NA	Atm.cm3/s
Panel leakage	NA	

SPECIFICATION

OTHER CHARACTERISTICS

Others: **NA**