


STRAIGHT FLANGE CABLE JACK 10+11/50

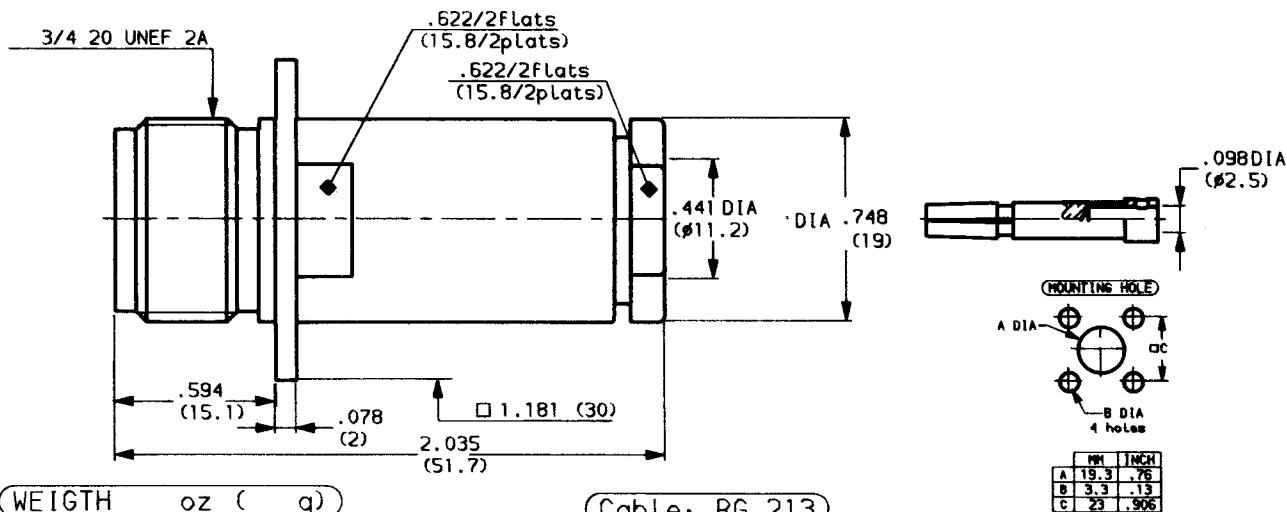

WEIGHT oz (g)

Cable: RG 213

MM	INCH
A 19.3	.76
B 3.3	.13
C 23	.906

CHARACTERISTICS

NOMINAL IMPEDANCE	50	Ω
FREQUENCY RANGE	0-3	GHz
TEMPERATURE RATING	-55/+155	°C
VSWR	AD	Max
RF INSERTION LOSS	AD	dB Maxi
VOLTAGE RATING	1500	Vrms Maxi
DIELECTRIC WITHSTANDING VOLTAGE	5000	Vrms mini
INSULATION RESISTANCE	5000	MΩ mini
HERMETIC SEAL	NA	cc/s Atm.cm3/s
LEAKAGE (pressurized only)	NA	psi MPa

STANDARDISATION

CABLE RETENTION 44.05 lb mini
200 N

CENTER CONTACT RETENTION

Axial force - mating end NA lb mini
N
Axial force - opposite end 6.075 lb mini
27 N
Torque (Min) NA Inch.oz
cm.N

RECOMMENDED TORQUES

Mating NA Inch.Lb
cm.N
Panel nut NA Inch.Lb
cm.N
Clamp nut 70.88 Inch.Lb
800 cm.N

CONSTRUCTION

CONNECTOR PARTS	MATERIALS	FINISH
BODY	BRASS	NICKEL
OUTER CONTACT	BRASS	NICKEL
CENTER CONTACT	BRASS	SILVER
INSULATORS	PTFE	-
-	-	-
-	-	-
-	-	-
-	-	-
-	-	-

ISSUE	REVISION No	DESCRIPTION	BY	DATE
.
.
.
.

Initiated on 26. JUN. 91
Superseded on _____
The information given here is subject to change without notice. Design changes may be in order to improve the product.

