


**RIGHT ANGLE F MMT - STRAIGHT M SMA**

**R285.024.071**

**CABLE 2.6/50 D-BR - 200MM**

Series : **CORD-STD**

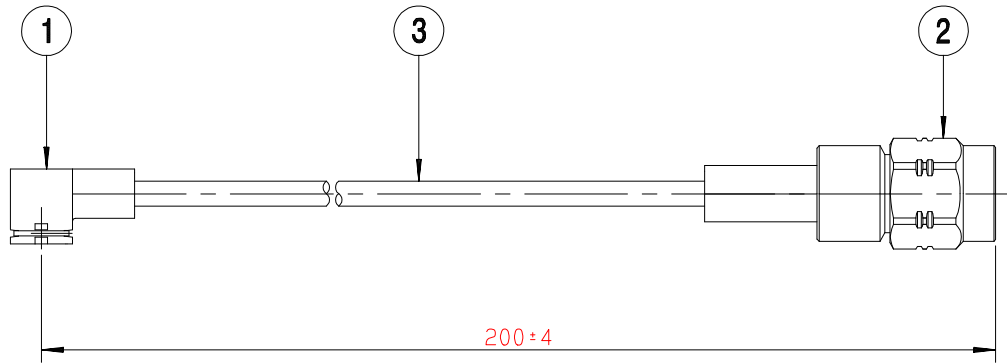

- \* 1 \* Connector A : **R210.158.010**
  - \* 2 \* Connector B : **R124.072.220**
  - \* 3 \* Cable : **C291.185.067**
- Type : **CAB HF 3/50 D - K02252D-SUHNER - MARRON**

**ELECTRICAL CHARACTERISTICS**

Impedance	<b>50 Ω</b>
Frequency	<b>0-3 GHz</b>
Operating temperature	<b>-55/+100 ° C</b>
VSWR	<b>1.10 + 0,000 x F(GHz) Maxi</b>
Insertion loss	<b>0.230 √F(GHz) dB Maxi</b>
Voltage rating	<b>170 Veff Maxi</b>
Dielectric withstanding voltage	<b>500 Veff mini</b>
Insulation resistance	<b>5000 MΩ mini</b>

**SPECIFICATION**

Weight	<b>9,3400 g</b>
Cable retention	<b>60 N mini</b>
Others :	-

