


JACK MML H1.5 - PLUG SMA


STRAIGHT ADAPTER

R302.153.000

Série : ADAPTER

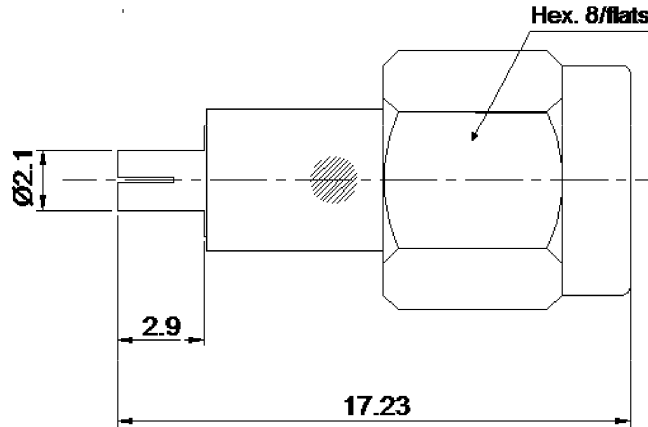

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (µm)
BODY	BRASS	GOLD
CENTER CONTACT	BERYLLIUM COPPER	GOLD
OUTER CONTACT	BERYLLIUM COPPER	GOLD
INSULATOR	PTFE	
GASKET		
OTHERS PARTS	STAINLESS STEEL	PASSIVATED
-	-	-
-	-	-

Issue : 1020 A

In the effort to improve our products, we reserve the rights to make changes judged to be necessary.



JACK MML H1.5 - PLUG SMA

R302.153.000

STRAIGHT ADAPTER

Série : ADAPTER

PACKAGING

SPECIFICATION

Standard	Unit	Other
1	-	Contact us

ELECTRICAL CHARACTERISTICS

ENVIRONMENTAL

Impedance	50	Ω
Frequency	0-6	GHz
VSWR	1.2 + 0,0000	x F(GHz) Maxi
Insertion loss	0.1	\sqrt{F} (GHz) dB Maxi
RF leakage	- (NA)	- F(GHz)) dB Maxi
Voltage rating	150	Veff Maxi
Dielectric withstanding voltage	200	Veff mini
Insulation resistance	500	M Ω mini

Operating	-40/+90	$^{\circ}$ C
Hermetic seal	NA	Atm.cm3/s
Panel leakage	NA	

MECHANICAL CHARACTERISTICS

OTHER CHARACTERISTICS

Center contact retention		
Axial force – Mating end	0.15	N mini
Axial force – Opposite end	0.15	N mini
Torque	NA	N.cm mini
Recommended torque		
Mating	MML	0 N.cm
	SMA	100 N.cm
		0 N.cm
Panel nut	NA	N.cm
Mating life	100	Cycles mini
Weight	2,6000	g

Issue : 1020 A

In the effort to improve our products, we reserve the rights to make changes judged to be necessary.

