


JACK MML H1.5 - PLUG SMA


STRAIGHT ADAPTER

R302.153.001

Série : ADAPTER

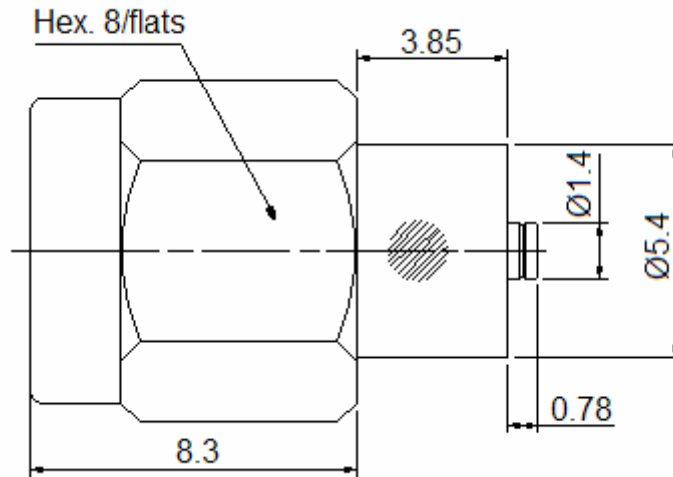

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (µm)
BODY	STAINLESS STEEL	PASSIVATED
CENTER CONTACT	BRASS	GOLD
OUTER CONTACT		
INSULATOR	PTFE	
GASKET		
OTHERS PARTS	STAINLESS STEEL	PASSIVATED
-	-	-
-	-	-

Issue : 1020 A

In the effort to improve our products, we reserve the rights to make changes judged to be necessary.



JACK MML H1.5 - PLUG SMA

R302.153.001

STRAIGHT ADAPTER

Série : ADAPTER

PACKAGING

SPECIFICATION

Standard	Unit	Other
1	-	Contact us

ELECTRICAL CHARACTERISTICS

ENVIRONMENTAL

Impedance	50	Ω
Frequency	0-6	GHz
VSWR	1.2 + 0,0000	x F(GHz) Maxi
Insertion loss	0.1	\sqrt{F} (GHz) dB Maxi
RF leakage	- (NA)	- F(GHz)) dB Maxi
Voltage rating	150	Veff Maxi
Dielectric withstanding voltage	200	Veff mini
Insulation resistance	500	M Ω mini

Operating	-40/+90	$^{\circ}$ C
Hermetic seal	NA	Atm.cm3/s
Panel leakage	NA	

MECHANICAL CHARACTERISTICS

OTHER CHARACTERISTICS

Center contact retention		
Axial force – Mating end	0.15	N mini
Axial force – Opposite end	0.15	N mini
Torque	NA	N.cm mini
Recommended torque		
Mating	MML	0 N.cm
	SMA	100 N.cm
		0 N.cm
Panel nut	NA	N.cm
Mating life	100	Cycles mini
Weight	2,4000	g

Issue : 1020 A

In the effort to improve our products, we reserve the rights to make changes judged to be necessary.

