


INSULATED PANEL SOCKETS


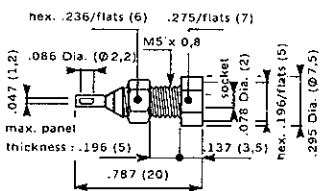

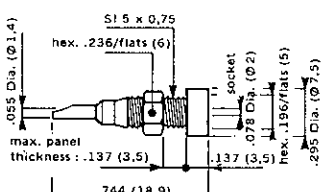

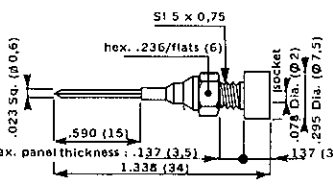

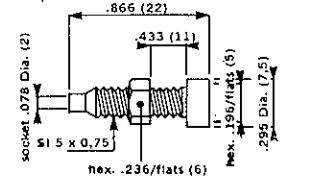
2 mm Ø

R 921 ... SERIES

GENERAL CHARACTERISTICS

- Contact resistance : $\leq 0.8 \text{ m}\Omega$
- Max. current rating : 10 amps
- Test voltage : 1500 V r.m.s.
- Operating voltage : 250 V r.m.s.
- Insulation resistance : $\geq 5000 \text{ M}\Omega$
- Engagement force : 14 N
- Operating temperature range : $-60^\circ \text{C} + 100^\circ \text{C}$

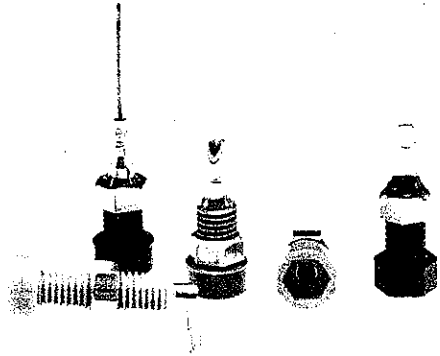

| SOCKETS | PART NUMBER | COLOUR | DESCRIPTION | DIMENSIONS |
|--|--|--|--|---|
|  DL - PI | R 921 930 R 921 931 R 921 932 R 921 933 R 921 934 R 921 936 | Black Red Green Blue Yellow White | Insulated panel socket - Solder connection Stamped contact |  |
|  DL - PI | R 921 920 R 921 921 R 921 922 R 921 923 R 921 924 R 921 926 | Black Red Green Blue Yellow White | Insulated panel socket - solder connection Wire size : AWG 20 max Machined contact |  |
|  DL - PI.W | R 921 970 R 921 971 R 921 972 R 921 973 R 921 974 R 921 976 | Black Red Green Blue Yellow White | Insulated panel socket - wire wrap post |  |
|  PL - FF | R 921 990 R 921 991 R 921 992 R 921 993 R 921 994 R 921 996 | Black Red Green Blue Yellow White | Insulated panel mounting feedthrough (female - female) |  |

● Supplied in bags of 100 of any part number