



RADIALL[®]
MULTICONTACT CONNECTORS

TECHNICAL DATA SHEET



610 026

Series
DSX

SIZE 5 COAXIAL SOCKET CONTACT
FOR RG316 CABLE

Issue:
18 DEC 96

Page
1 / 1

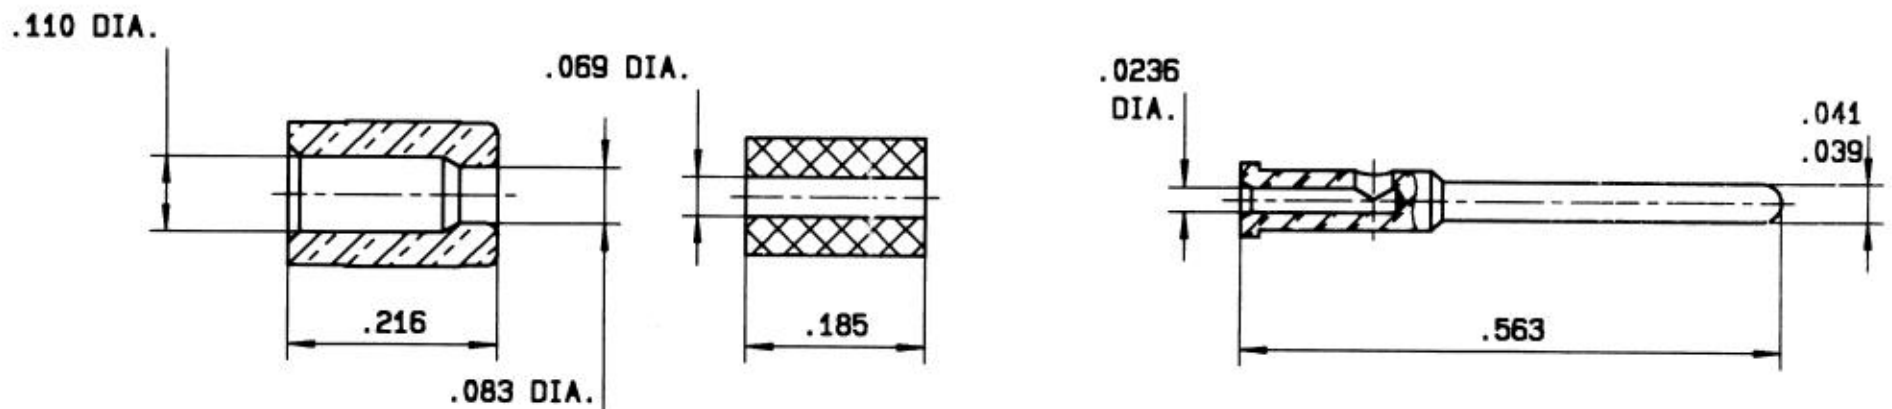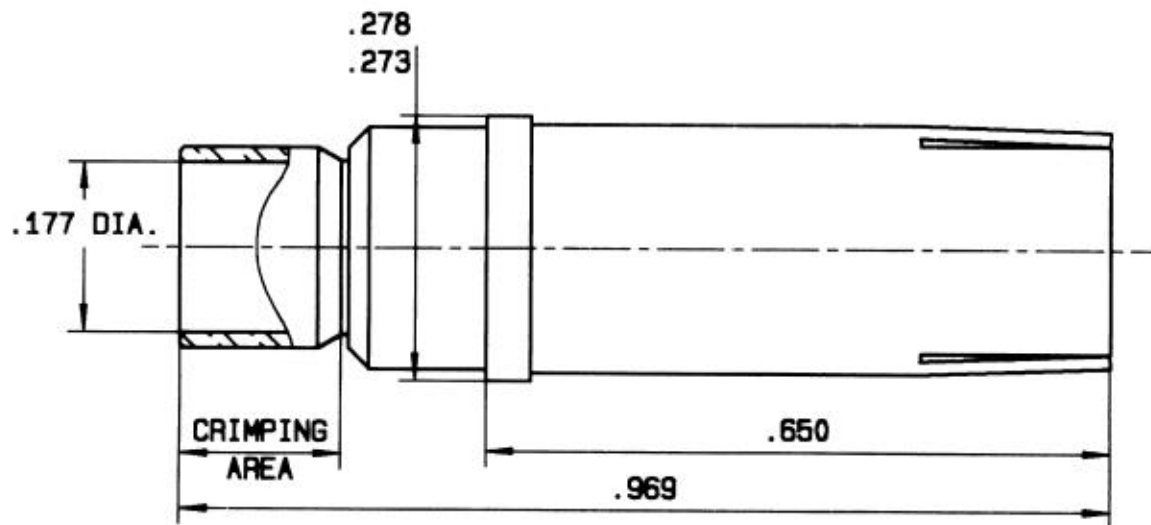


MATERIAL AND FINISH :

OUTER CONTACT BERYLLIUM COPPER - GOLD OVER NICKEL UNDERPLATE
 CENTER CONTACT : BRASS - GOLD OVER NICKEL UNDERPLATE
 FERRULE : ANNEALED BRASS - GOLD OVER NICKEL UNDERPLATE
 DIELECTRIC : PTFE


WIRING INSTRUCTIONS :

STRIP THE BRAID AT DIMENSION SHOWN

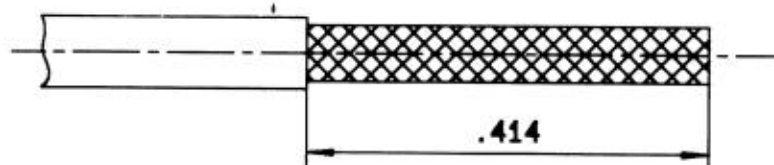

CENTER CONTACT : SOLDER
 INTRODUCE CENTER CONTACT SUB ASSEMBLY
 INTO OUTER CONTACT AND CRIMP USING :

CRIMPING TOOL : M22520/5-01 (RADIALL 282293)
 DIE : M22520/5-05 (RADIALL 282246) HEX B 4.5/FLATS

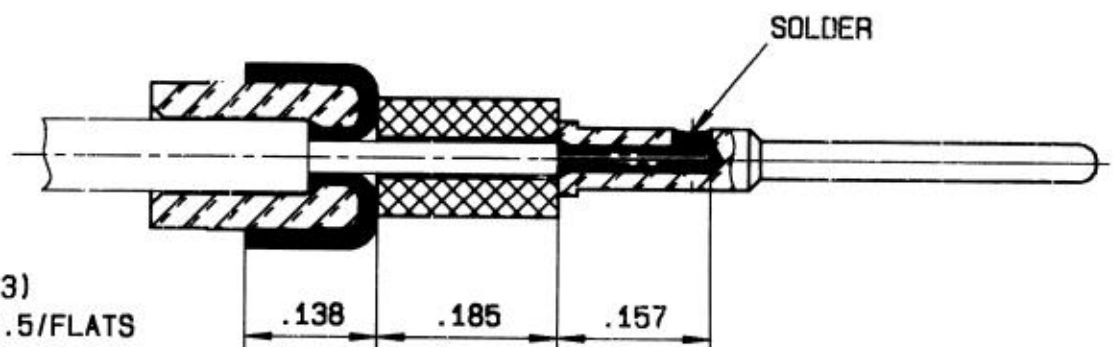

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.