





Series
DSX

SIZE 5 COAXIAL PIN CONTACT
FOR RG178 AND KX21 CABLES

Issue:
7/7/97


Page
1 / 1

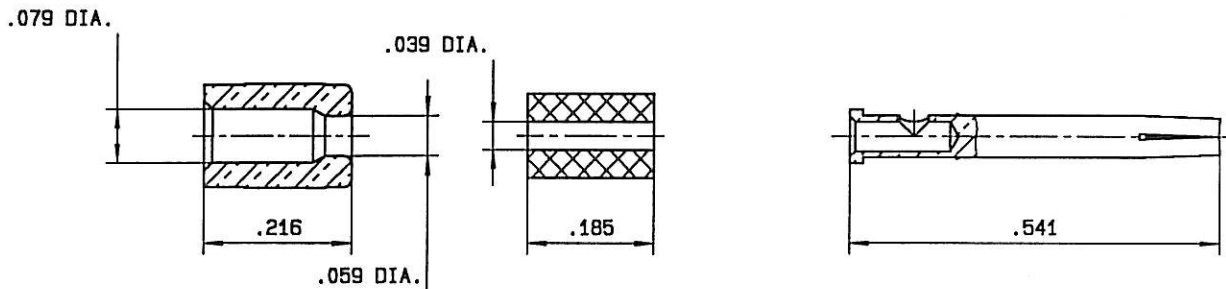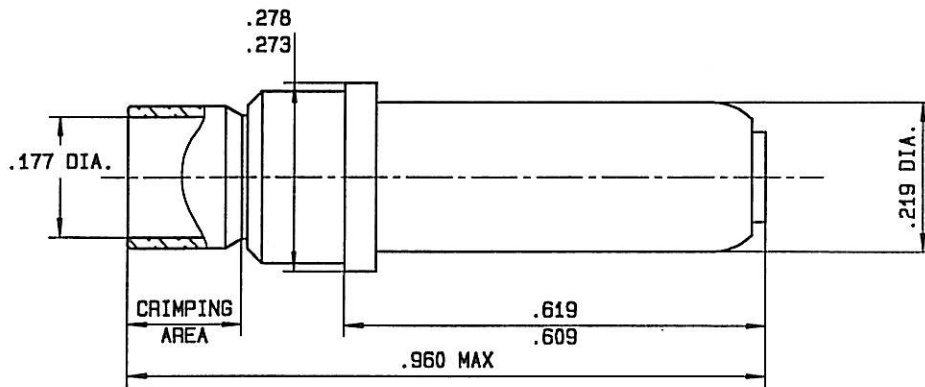

MATERIAL AND FINISH :
 OUTER CONTACT COPPER ALLOY - GOLD OVER NICKEL UNDERPLATE
 CENTER CONTACT : COPPER ALLOY - GOLD OVER NICKEL UNDERPLATE
 FERRULE : ANNEALED BRASS - GOLD OVER NICKEL UNDERPLATE
 DIELECTRIC : PTFE


WIRING INSTRUCTIONS :

STRIP THE BRAID AT DIMENSION SHOWN



CENTER CONTACT : SOLDER
 INTRODUCE CENTER CONTACT SUB ASSEMBLY
 INTO OUTER CONTACT AND CRIMP USING :

CRIMPING TOOL : M22520/5-01 (RADIALL 282293)
 DIE : M22520/5-05 (RADIALL 282246) HEX B 4.5/FLATS

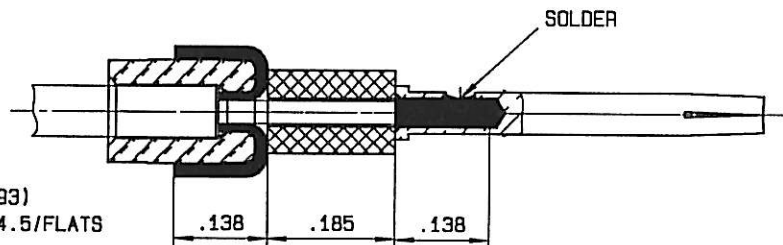

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112-9610

CREATION				
PEN: /				
NOM: JP MACARI				
DATE: 28/6/76	7 JULY 97	DIE 282246 WAS 282241 TOOL 282293 WAS 282240	GOMBERT	JACOB
APPR.: /	Issue	Revisions	Name	Approved