




Series  
DSX

ENVIRONMENTAL SIZE 5 TRIAXIAL SOCKET CONTACT  
FOR PAN6595XM, RGX179 (AXON), EPD266467Q (RAYCHEM) CABLES  
and FOR 36C7 and 36T7 WITH GROMMET ONLY

Issue:  
15 DEC 2004

Page  
1/2

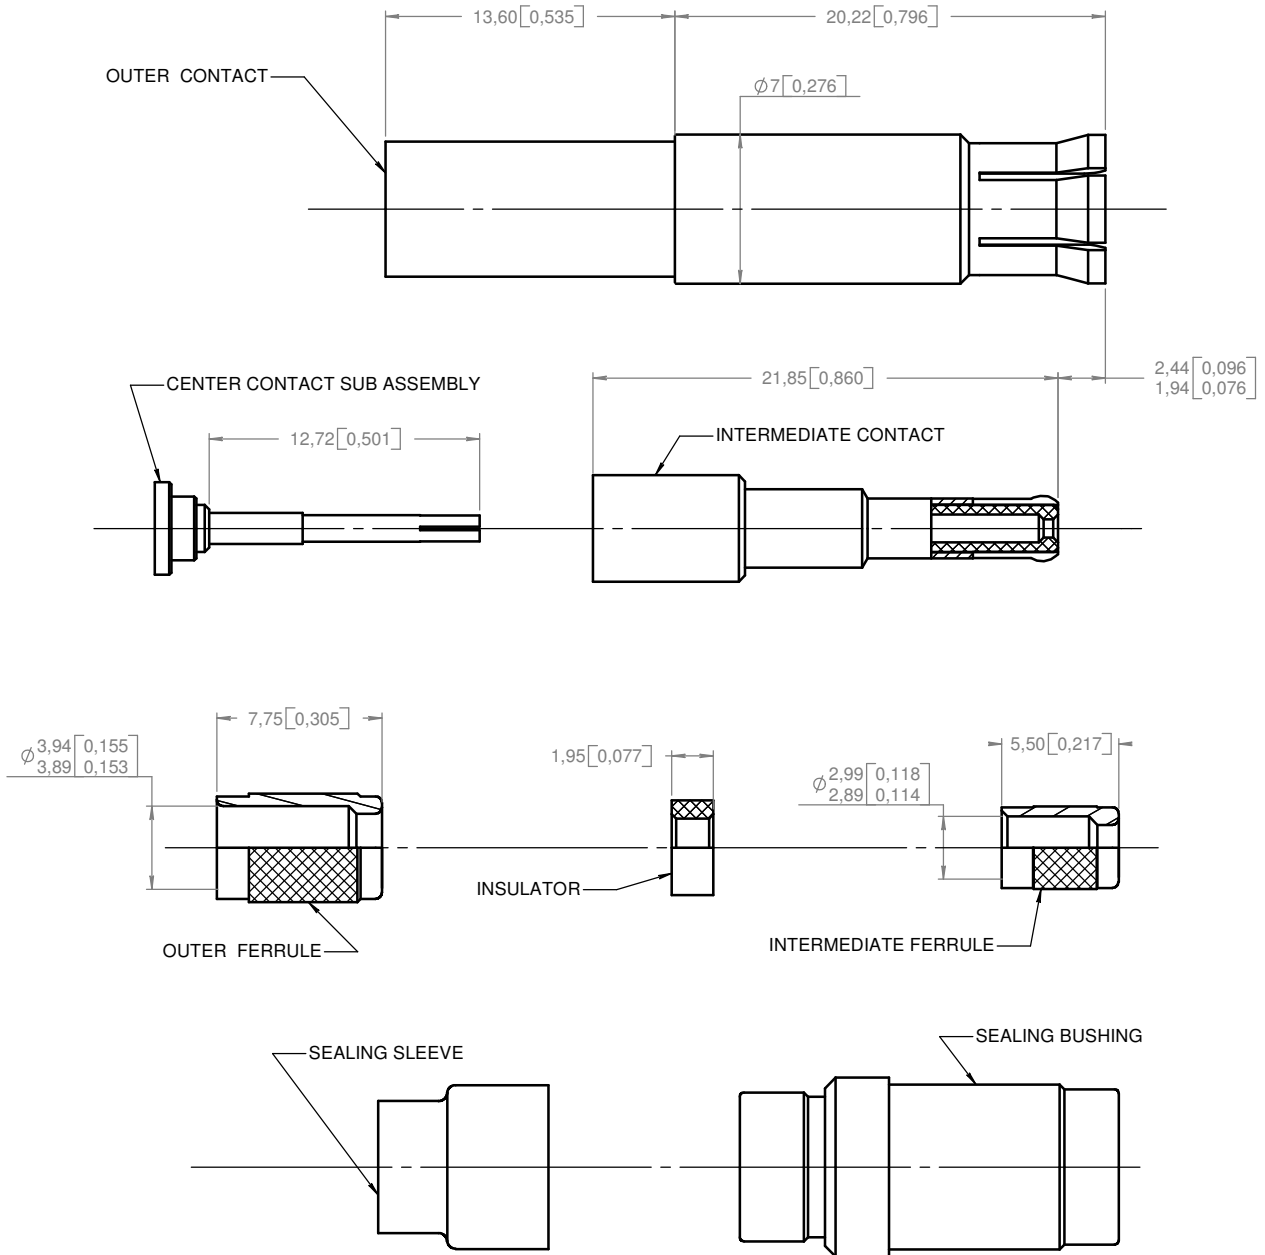

DIMENSIONS : mm (inch) -



This information is given as an indication in the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112\_9311

CREATION				
PEN: M94106050A				
NOM: GOMBERT				
DATE: 11 JAN 95	15 DEC 04	DRAWING Solidworks; two page was (1) page	GOMBERT	C.Lahoreau
APPR.:	Mar 12 03	Redrawn. Modification of sealing bushing.	L.Garcia	C.Lahoreau
	Issue	Revisions	Name	Approved

616095010EN



**MATERIAL**

OUTER, INTERMEDIATE and CENTER CONTACT: BERYLLIUM COPPER PER ASTM-B-196  
OUTER and INTERMEDIATE FERRULE: BRASS PER ASTM B 16/B 16M  
INSULATOR : PTFE PER ASTM-D-1710 or EQUIVALENT  
SEALING BUSHING: THERMOSETTING PLASTIC PER ASTM D 5205  
SEALING SLEEVE : FLUROSILICONE ELASTOMER PER MIL-R-25988

**FINISH :**

ALL METALIC PARTS: .00005 OF GOLD PER MIL-G-45204, TYPE I or II, GRADE C ou D  
CLASS 1 OVER PER QQ-N-290

**TOOLS MUST BE ORDERED SEPARATLY**

CENTER CONTACT: CRIMPING TOOL M22520/2-01 (RADIALL P/N 282281)  
SELECTOR SET: 5  
POSITIONER RADIALL P/N 282576  
INTERMEDIATE CONTACT: CRIMPING TOOL M22520/5-01 (RADIALL P/N 282293)  
DIE M22520/5-05, DIE CLOSURE B (RADIALL P/N 282246)  
OUTER CONTACT: CRIMPING TOOL M22520/5-01 (RADIALL P/N 282293)  
DIE M22520/5-05, DIE CLOSURE A (RADIALL P/N 282246)

EXTRACTION TOOL M81969/28-01 (RADIALL 282946)

WIRING : SEE SPECIFICATION RP7228

ATTENTION: SLIDE OUTER SEALING SLEEVE AND SEALING BUSHING OVER THE CABLE BEFORE WIRING