




Series
DSX

ENVIRONMENTAL SIZE 9 CONCENTRIC TWINAX SOCKET CONTACT FOR 32C4 and 32T4 ONLY
FOR MIL C 17 /17600002 CABLE
SIMILAR 17B9E4005-505A

Issue:
07/06/05

Page
1/2

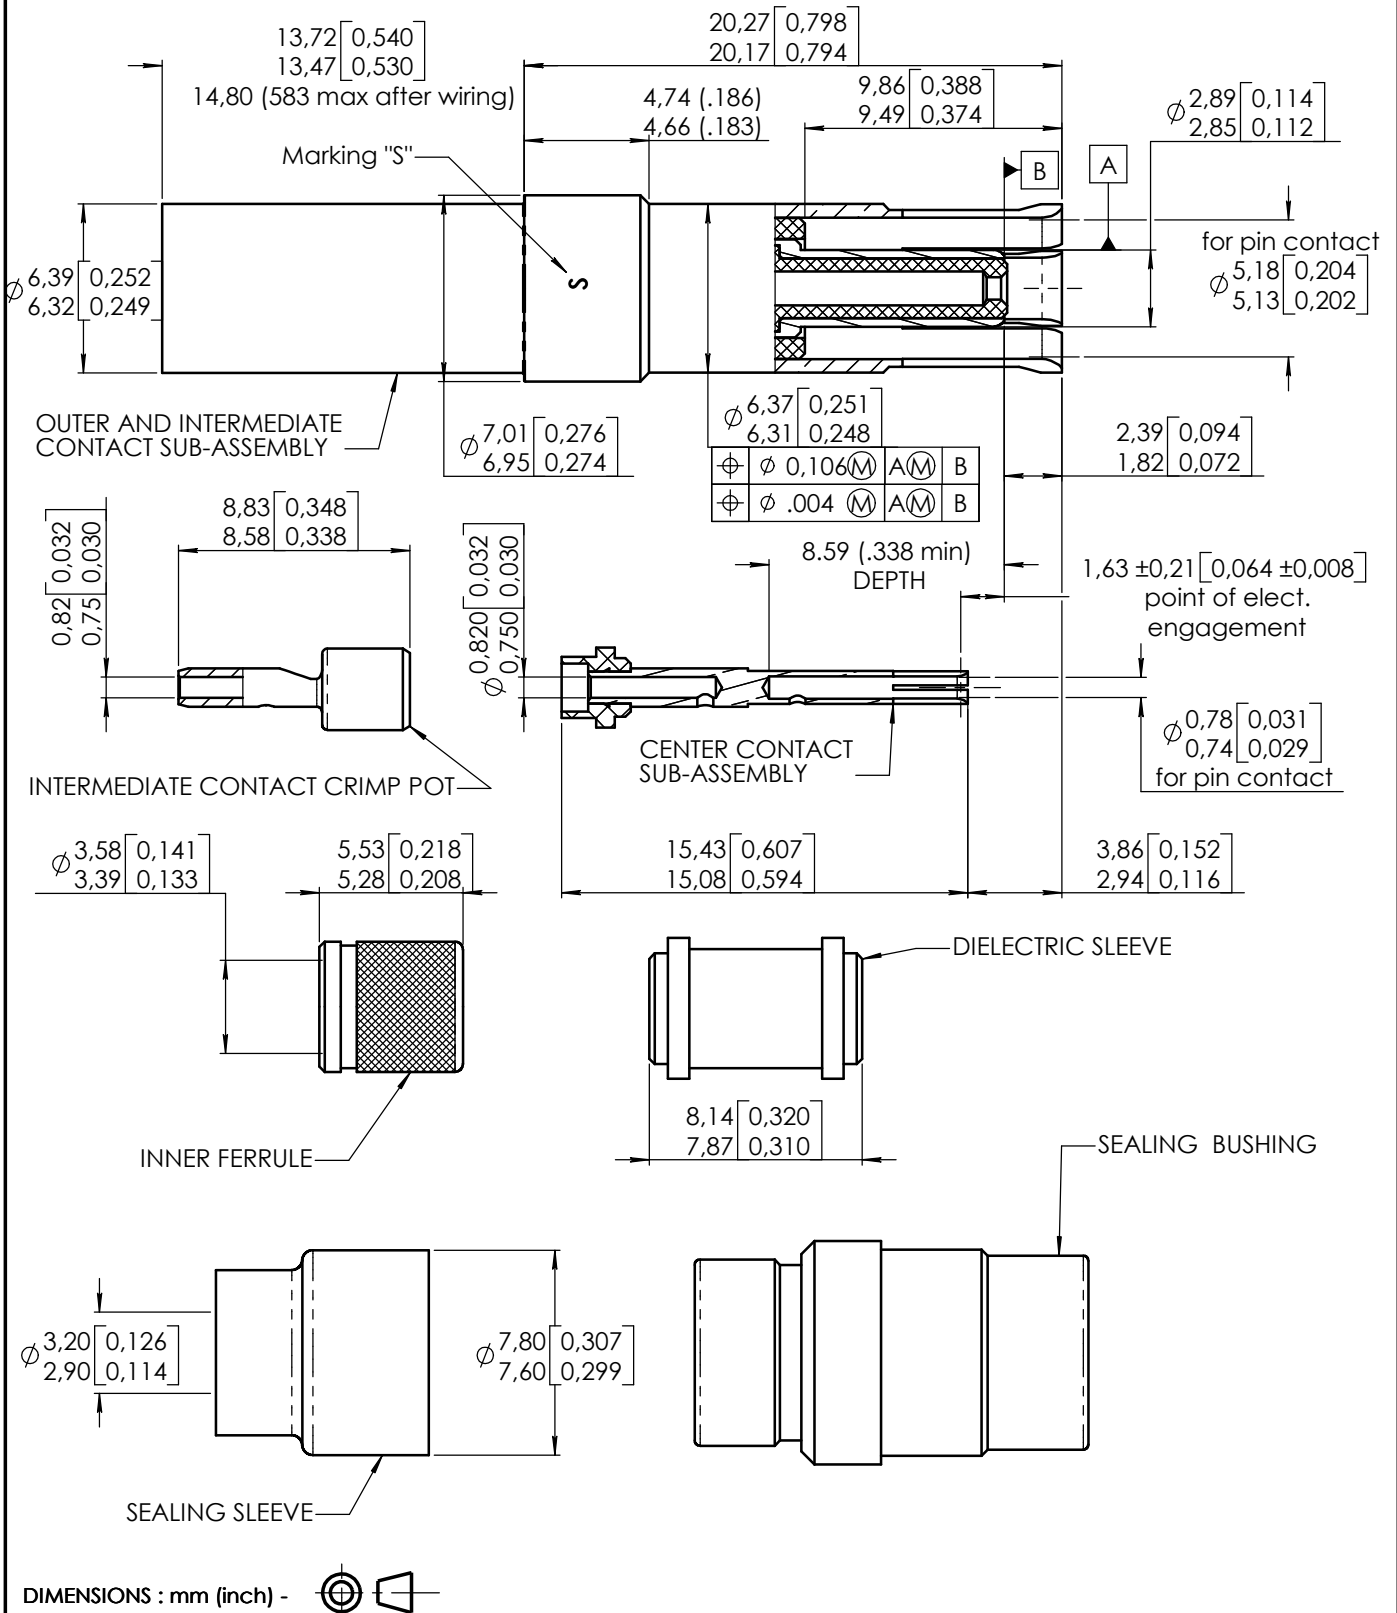

This information is given as an indication, in the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112_9311

CREATION					
PEN:					
NOM: JP MACARI					
DATE: MAY .29.91	07/06/05	Added similar 17B9E4005-505A and WIRING SPECIFICATION MICT0300004 in p.2/2	Gombert	Lahoreau	
APPR.:	Issue	Revisions	Name	Approved	



MATERIAL

OUTER, INTERMEDIATE and CENTER CONTACT : BERYLLIUM COPPER PER ASTM-B-196
 OUTER and INTERMEDIATE FERRULES : BRASS PER ASTM B 16/B 16M
 DIELECTRIC PARTS : P.T.F.E. PER ASTM-D-1710 or EQUIVALENT
 SEALING BUSHING : THERMOSETTING PLASTIC PER ASTM D 5205
 SEALING SLEEVE : FLUOROSILICONE ELASTOMER PER MIL-R-25988

FINISH


ALL METAL PARTS : 0.000050 INCH OF GOLD PER MIL-G-45204, TYPE I or II, GRADE C or D
 CLASS 1 OVER NICKEL PER QQ-N-290

TOOLS : (order separatly)

CENTER CONTACT : CRIMPING TOOL M22520/2_01 (RADIALL 282281)
 POSITIONER RADIALL 282576
 INTERMEDIATE CONTACT CRIMP POT : CRIMPING TOOL M22520/2_01 (RADIALL 282281)
 POSITIONER RADIALL 282574
 OUTER CONTACT : CRIMPING TOOL M22520/5_01 (RADIALL 282293)
 DIE M22520/5_45 (RADIALL 282236)

EXTRACTION TOOL M81659/28_01 (RADIALL 282946)

WIRING : SEE SPECIFICATION MICT0300004
 INSPECTION DIMENSIONS AFTER ASSEMBLY

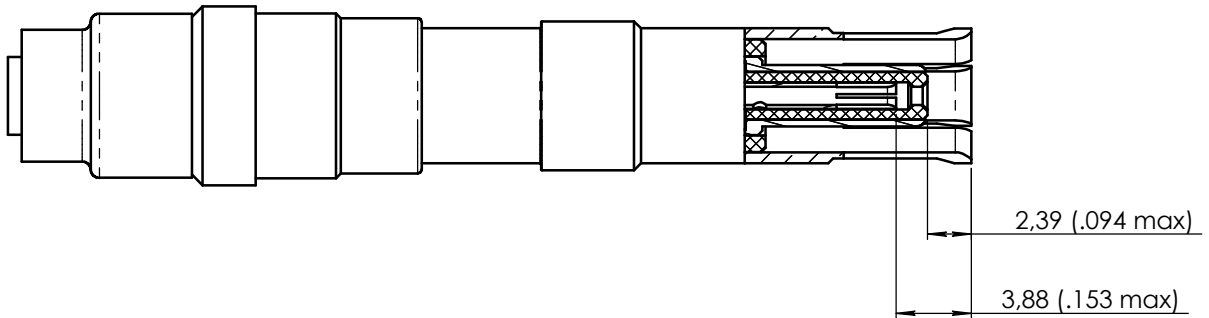

4112_9311 This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.