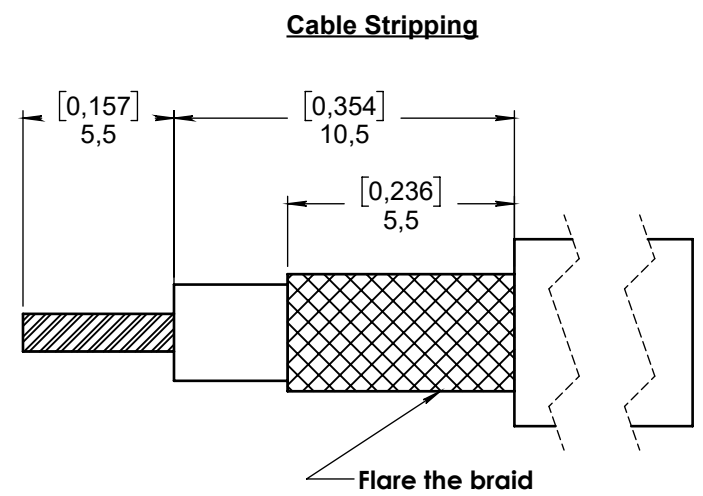
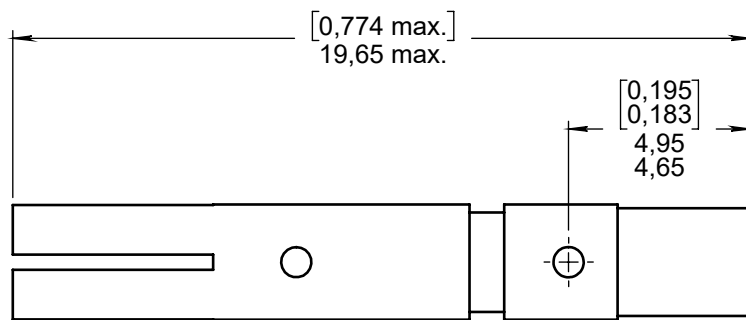
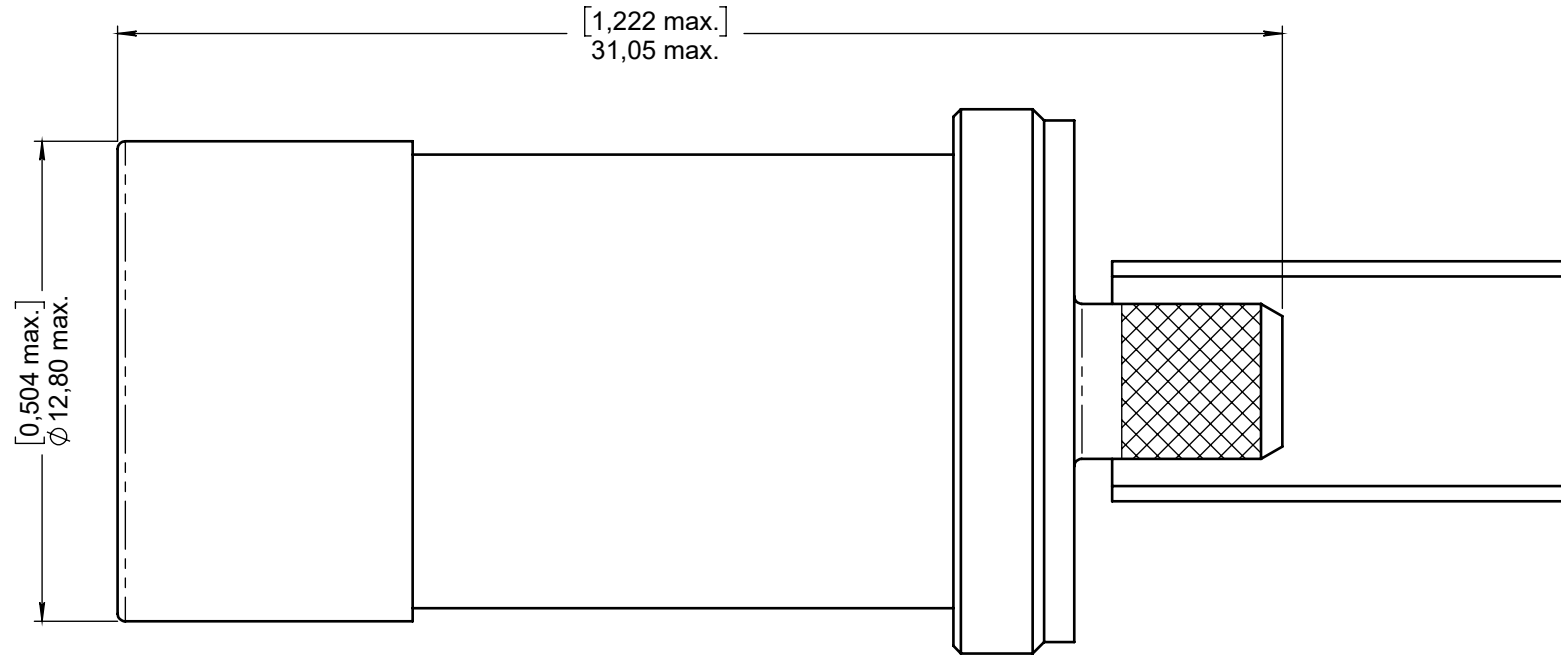



**Series  
DSX**
**SIZE 1 SOCKET COAX FOR RG142, KX23 AND RG223 CABLES**
**Issue:  
Sept. 11, 2017**
**Page  
1/1**

**CRIMPING TOOLS :**

- CRIMP CENTER CONTACT : 282291 (M22520/1.01)  
SELECTOR 7  
POSITIONER : 282997 (M22520/1.13)
- CRIMP OUTER CONTACT BODY : 282293 (M22520/5.01)  
POSITIONER 282246 (M22520/5.05)  
HEX : A

**Electrical Characteristics:**  
 Impedance 50 Ohms  
 R.O.S: 1,3 from 10MHz to 5GHz  
 Withstanding Voltage: 1000V

**DIMENSIONS : mm (inch are given for information only)**


Estimated weight : 14.5 g

<b>CREATION</b>  PEN: 82-076  NOM: GESBERT DATE: Jun, 09, 1982 APPR.:				
	Sep. 11, 2017	Plan redrawn with new format/EN traduction.	WEIHS H.	MOUTAULT W.
	Apr. 13, 1984	Added hole in central contact.	MACARI	MACARI
	Dec. 12, 1983	Arrangement of crimp ferrule, stripping dimensions modification	MACARI	MACARI
	Feb. 10, 1983	Tool 282291 was 282991	MACARI	MACARI
	Issue	Revisions	Name	Approved

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from RADIALL. This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.