


Series
DSX

SIZE 9 COAXIAL PIN CONTACT FOR
RG316, RG174, RG188, RG179 CABLES

Issue:
SEP 19, 2007

Page
1/1

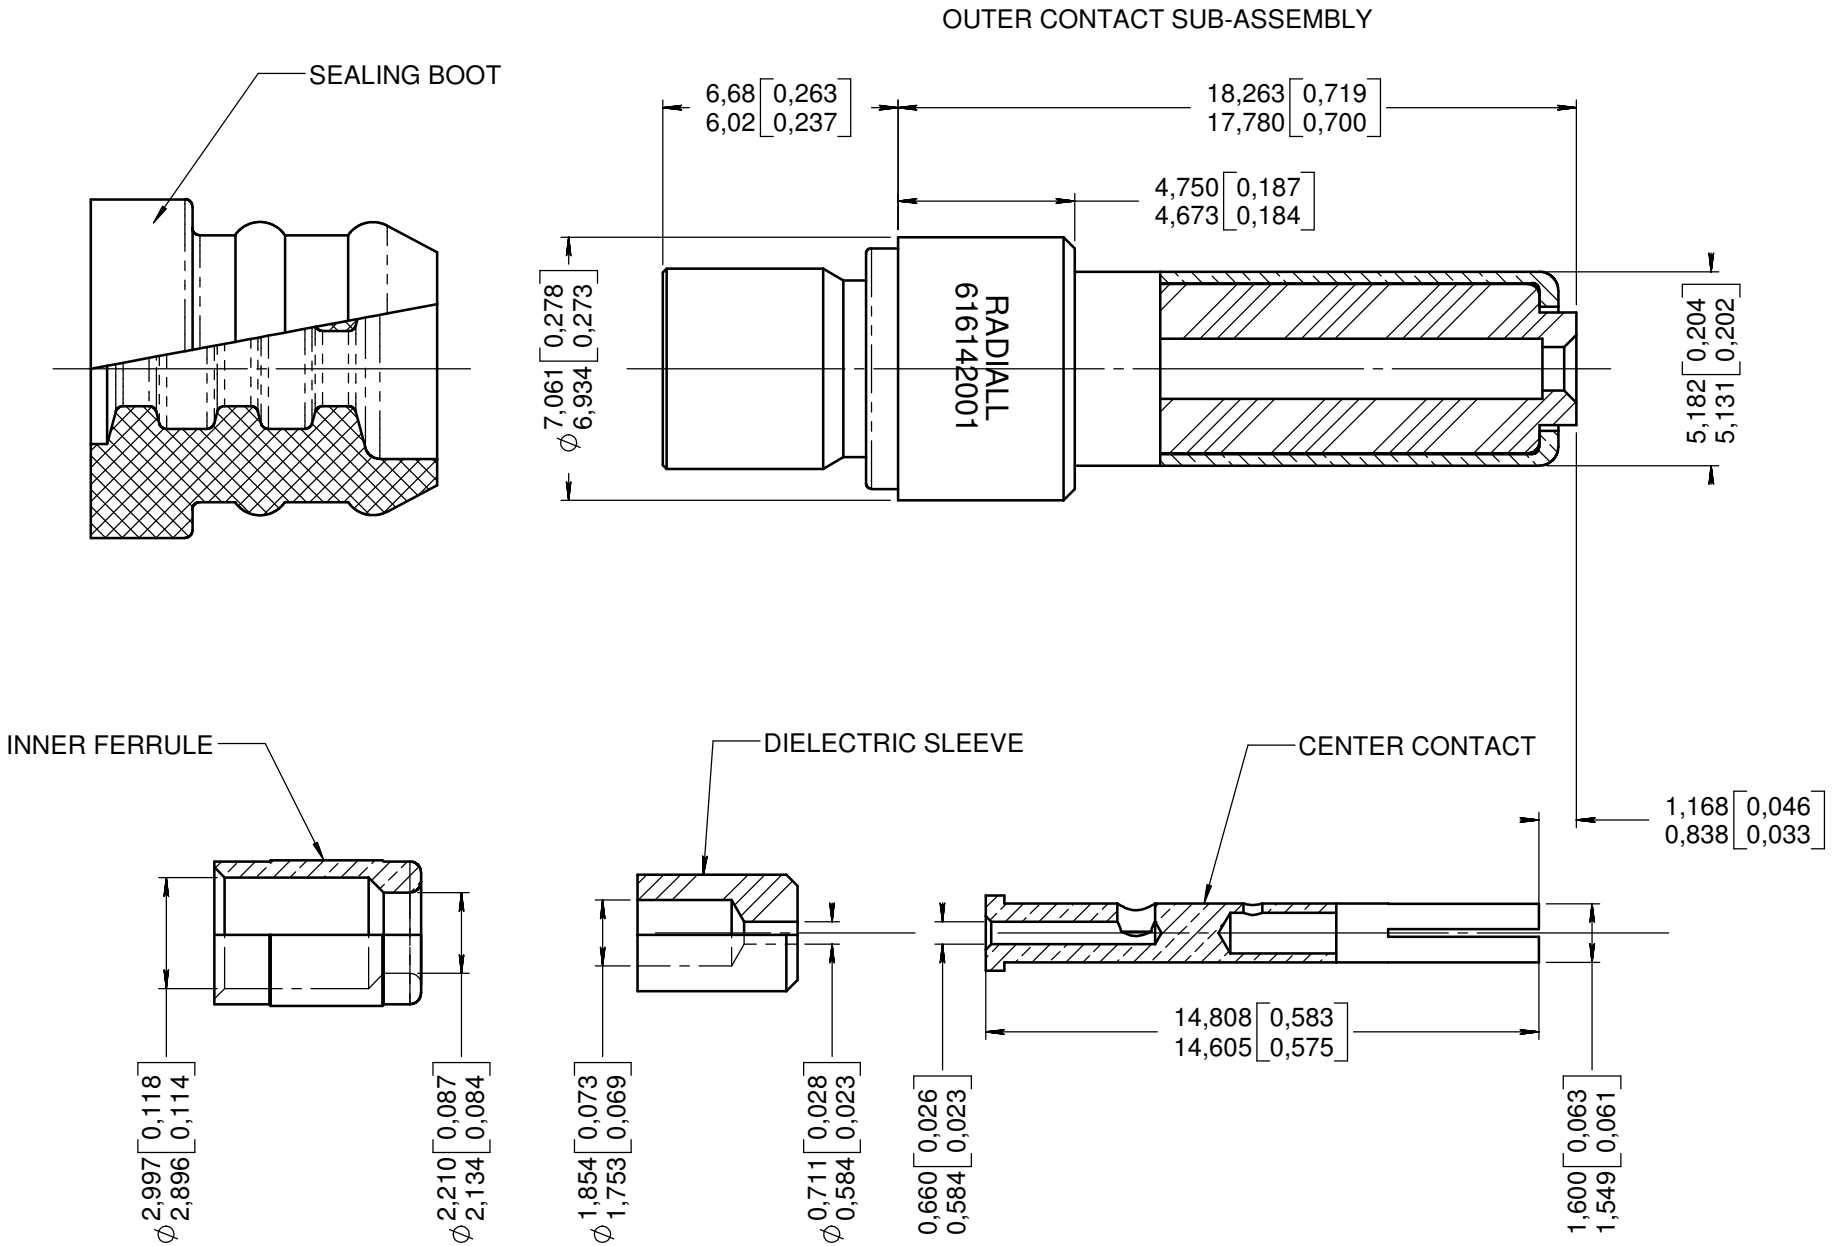

MATERIALS :

- Outer contact : Brass per ASTM-B-453/B-453M or equivalent
- Dielectric parts : P T F E per ASTM-D-1710 or equivalent
- Crimp barrel and Inner ferrule: Brass per ASTM-B-16/B16M or equivalent
- Center contact: Beryllium copper per ASTM-B196
- Sealing boot : Fluorosilicone per SAE AMS-R-25988

FINISH:

- .00005 of Gold per SAE AMS-2422 over Electrodeposited nickel per SAE AMS-QQ-N-290 (Class 2)


TOOL

- CENTER CONTACT: CRIMPING TOOL M22520/2_01 (RADIAL P/N 282281)
- SELECTOR SET: 6
- POSITIONNER RADIAL P/N 282974
- OUTER CONTACT: CRIMPING TOOL M22520/5_01 (RADIAL P/N 282293)
- DIE M22520/5_05 (RADIAL P/N 282246) DIE CLOSURE B

EXTRACTION TOOL: 282946 (M81969/28-01)(order separatly)

WIRING SEE SPECIFICATION RP7575

DIMENSIONS : mm (inch) -



This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112_9311

CREATION				
PEN:				
NOM: MACARI JP.	SEPT 19, 07	UPDATE TO SOLIDWORKS ACCORDING WITH COMPLIANCE MATRIX	DUFLOS	MONDOT
DATE: MAY 30 1991	JUNE 19, 00	DRAWING CAO	GOMBERT	JACOB
APPR.:	Issue	Revisions	Name	Approved