


Series  
**DSX**

NON ENVIRONMENTAL SIZE 9 CRIMP COAX PIN CONTACT  
FOR RG180 AND 195 CABLES

Issue:  
**MAY 25 2007**

Page  
**1/1**

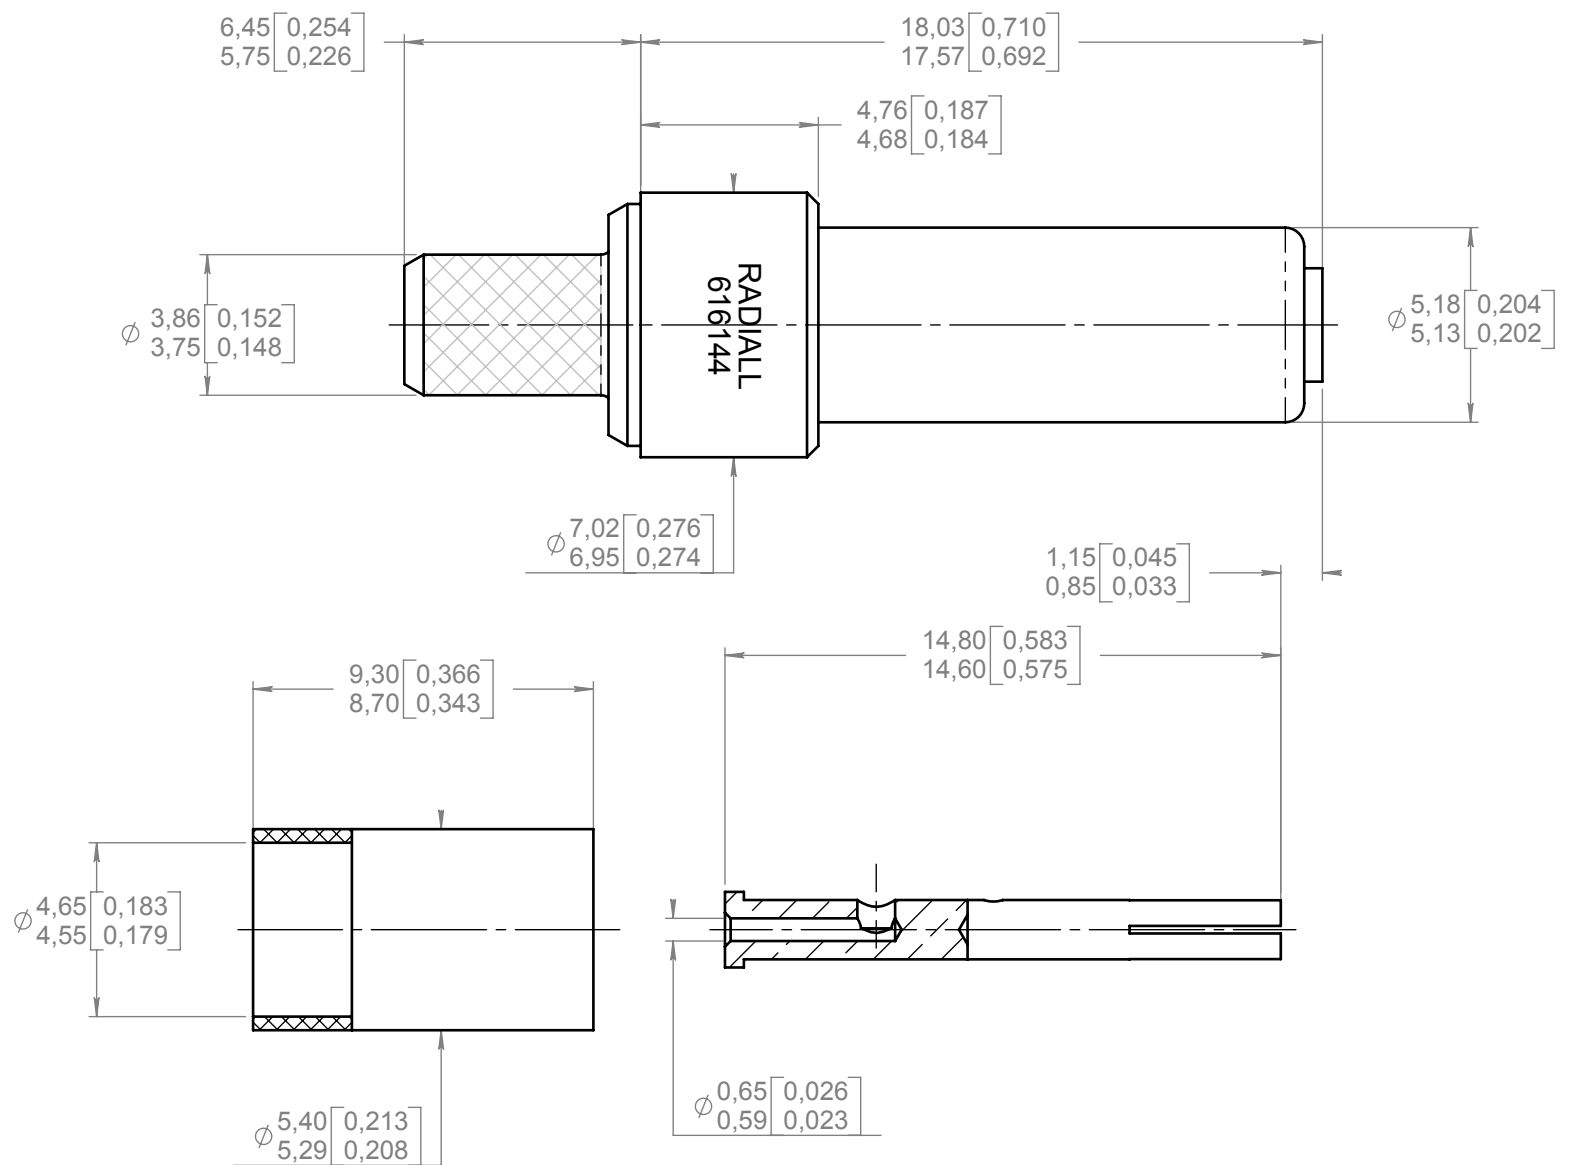

**MATERIAL:**

Center contact : Beryllium copper per ASTM-B-196  
Insulator : P T F E per ASTM-D-1710 or equivalent  
Outer contact, crimp barrel and ferrule: Copper alloy per ASTM B 453/B453 M

**FINISH:**

All metallic parts: .00005 of GOLD per MIL-G-45204 TYPE I or II  
grade C or D, class 1 over NICKEL per QQ-N-290

**DESIGN REQUIREMENTS**

Température range: -65° TO +125°C  
Impédance: 50 OHMS nominal  
V S W R: 1,30 from DC to 1500 MHz  
Diélectrique Withstanding Voltage: 750 VRMS at sea level

EXTRACTION TOOL: 282946 (M81969/28-01)(order separatly)

WIRING INSTRUCTIONS PER "MICT0100014"

**DIMENSIONS : mm (inch are given for information only)**



This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112\_9311

<b>CREATION</b>				
<b>PEN:</b>				
<b>NOM: MACARI</b>				
<b>DATE: SEP 1994</b>	25 05 07	REDRAWN - SUPPRESS DETAIL OF WIRING INSTRUCTION UPDATED - ADDED WIRING INSTRUCTION MICT 01 00014	VALGRESY	MONDOT
<b>APPR.: DESPOUYS</b>	Issue	Revisions	Name	Approved