




Series
DSX

SIZE 5 CONCENTRIC TWINAX PIN CONTACT FOR ENVIRONNEMENTAL INSERTS 36C7,36T7 ONLY
MIL C 17/176.00002 CABLE

Issue:
Mar 12, 2003

Page
1 / 1

OUTER AND INTERMEDIATE CONTACT SUB-ASSEMBLY

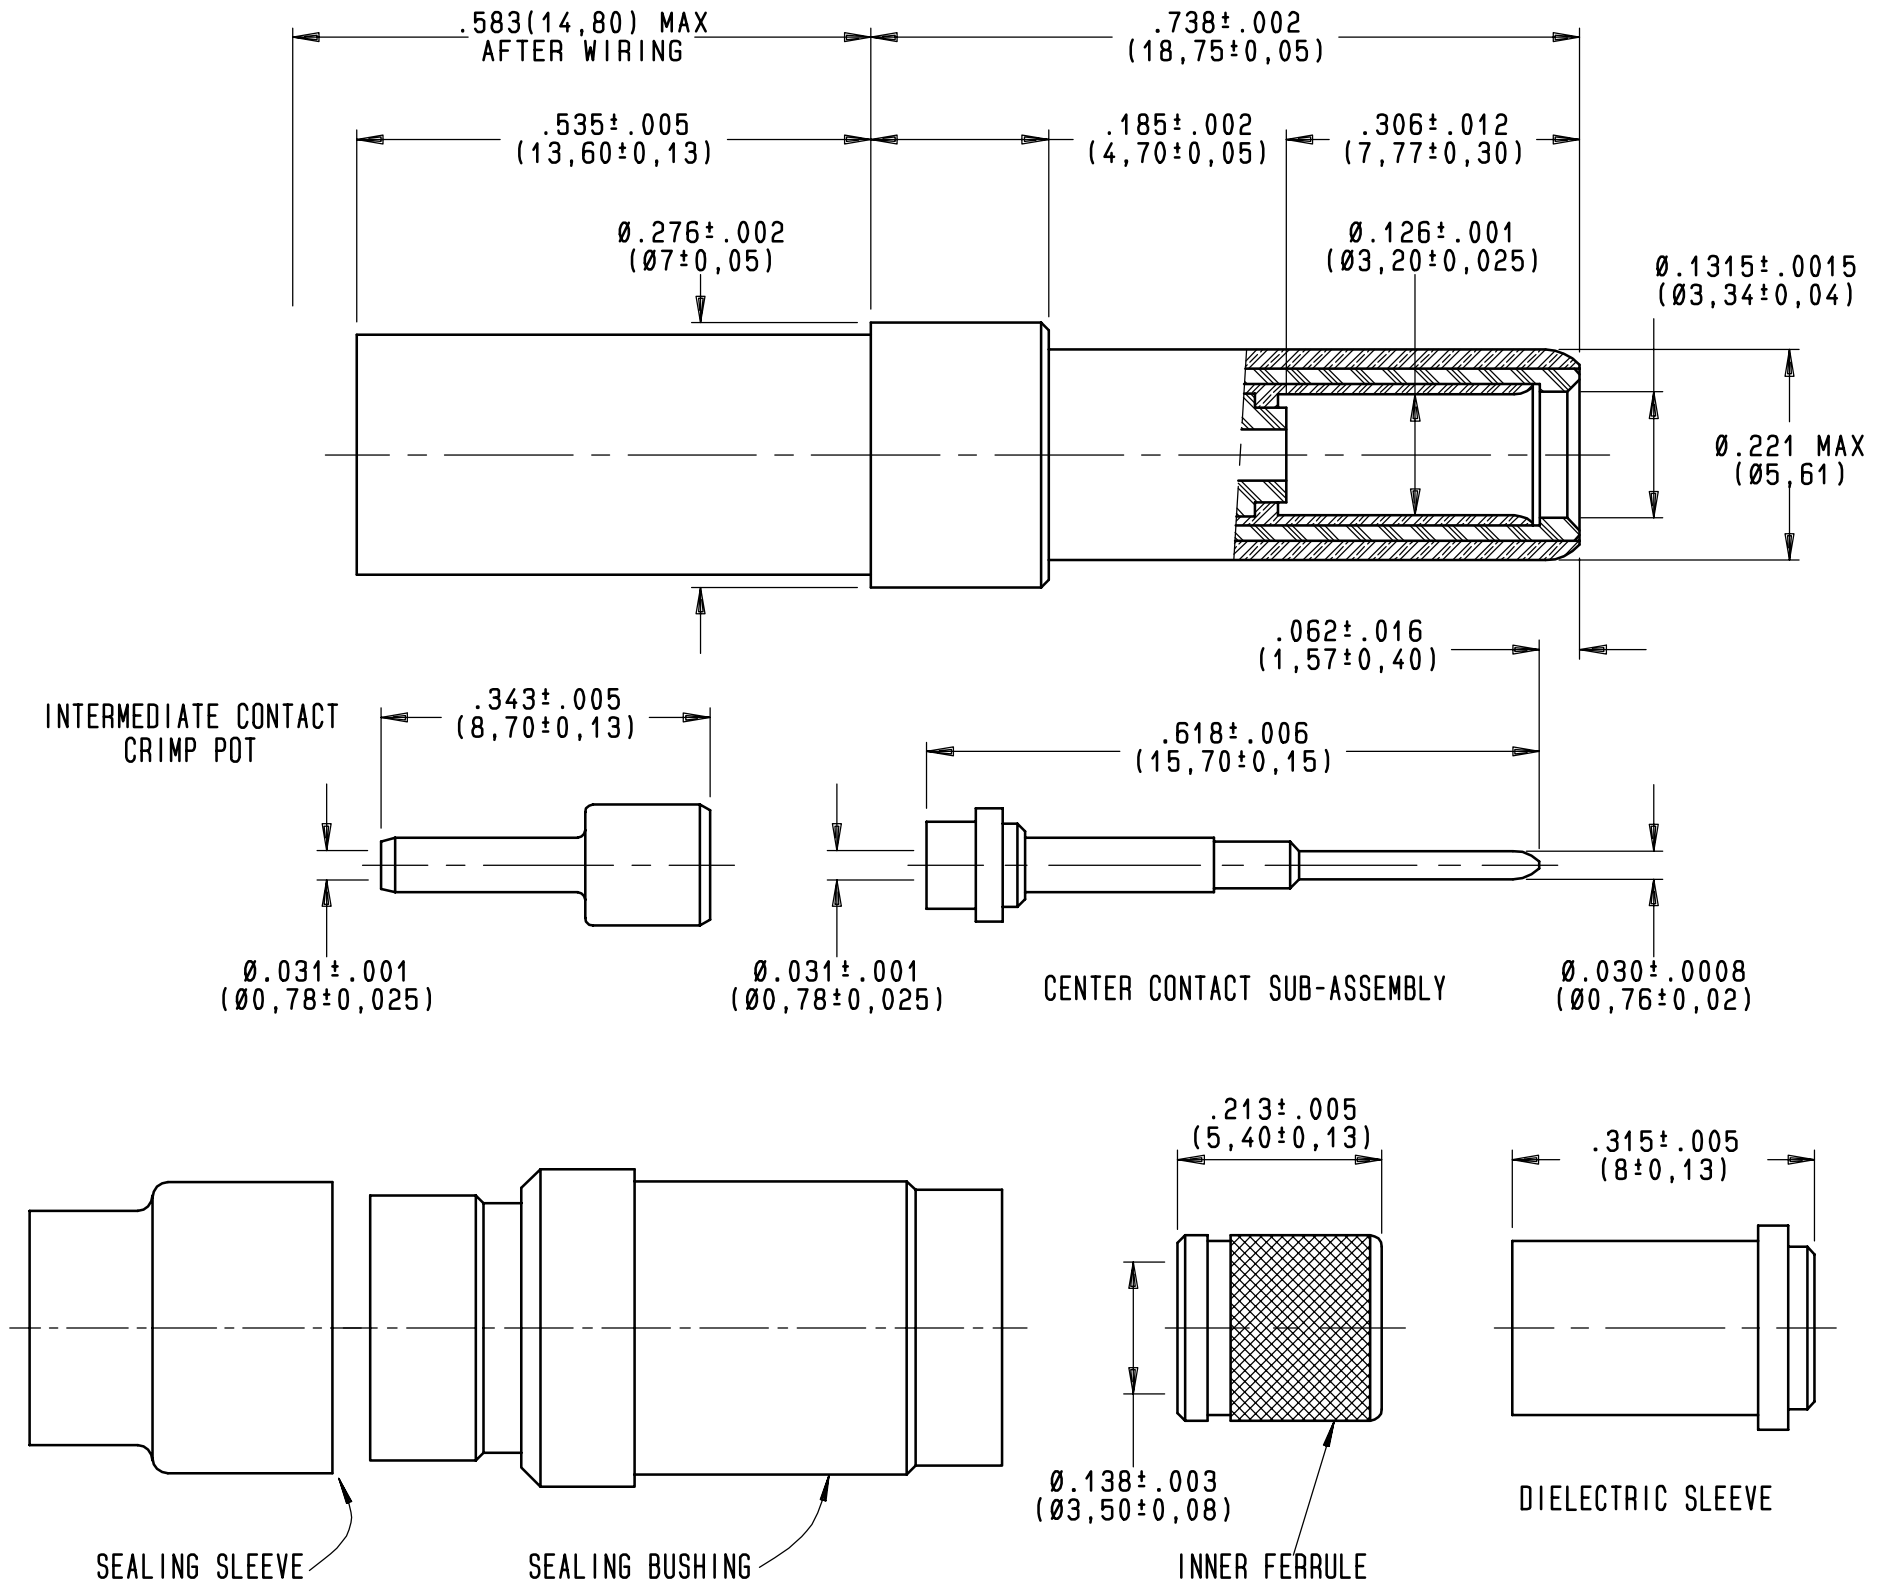

MATERIAL AND FINISH

ALL METAL PARTS: COPPER ALLOY_0.000050 INCH OF GOLD OVER NICKEL
DIELECTRIC PARTS: TEFLON

TOOLS

CENTER CONTACT: CRIMPING TOOL M22520/2_01 (RADIALL 282 281)
SELECTOR SET 5
POSITIONER RADIALL 282 576
INTERMEDIATE CONTACT CRIMP POT: CRIMPING TOOL M22520/2_01 (RADIALL 282 281)
SELECTOR SET 5
POSITIONER RADIALL 282 574
OUTER CONTACT: CRIMPING TOOL M22520/5 01 (RADIALL 282 293)
DIE M22520/5 45 (RADIALL 282 236) DIE CLOSURE B
EXTRACTION TOOL M81969/28_01 (RADIALL 282 946)

WIRING: SEE SPECIFICATION RP3364

ATTENTION: SLIDE OUTER SEALING SLEEVE AND SEALING BUSHING OVER THE CABLE BEFORE WIRING

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112_9311

CREATION				
PEN: M960106350A				
NOM: B GOMBERT				
DATE: 29 AUGUST 96	Mar 12 03	Modification of sealing bushing.	L.Garcia	C.Lahoreau
APPR.: K.Pécheux	Issue	Revisions	Name	Approved