


**Material :**

- Outer body contact, intermediate contact and center contact : beryllium copper per ASTM-B-196.
- Shield crimp sleeve and ferrule : Copper alloy per EN-12164.
- Dielectric and insulators: PTFE per ASTM-D-1710 or equivalent.

**Finish :**

- All metallic parts : Plating 0.00005 inch of gold per SAE AMS-2422 over nickel per SAE AMS QQ-N-290.

**WIRING INSTRUCTIONS : MICT0200000**

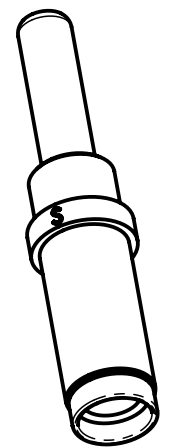

DIMENSIONS : mm (inch are given for information only)



This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112\_9311

CREATION				
PEN: M040400027A	Feb 22, 08	Dimension tolerances updated	Malty S.	LeGloahec
NOM: M.PESSARD	Apr 14, 05	"S" added on the outer body.	Pessard M.	L.GARCIA
DATE: Oct. 1st, 2004	Apr 01, 05	Dimensions and material standards added	LeGloahec	Pessard M.
APPR.: L.GARCIA	Jan 26, 05	MI CT 02 00000 was RP57802	M.PESSARD	L.GARCIA
	Issue	Revisions	Name	Approved