


Series
EPXB

SIZE 20 REAR RELEASE REAR REMOVABLE CRIMP PIN CONTACT
FOR AWG 20, 22 AND 24 CABLES

Issue:
Feb. 12, 2014

Page
1/1

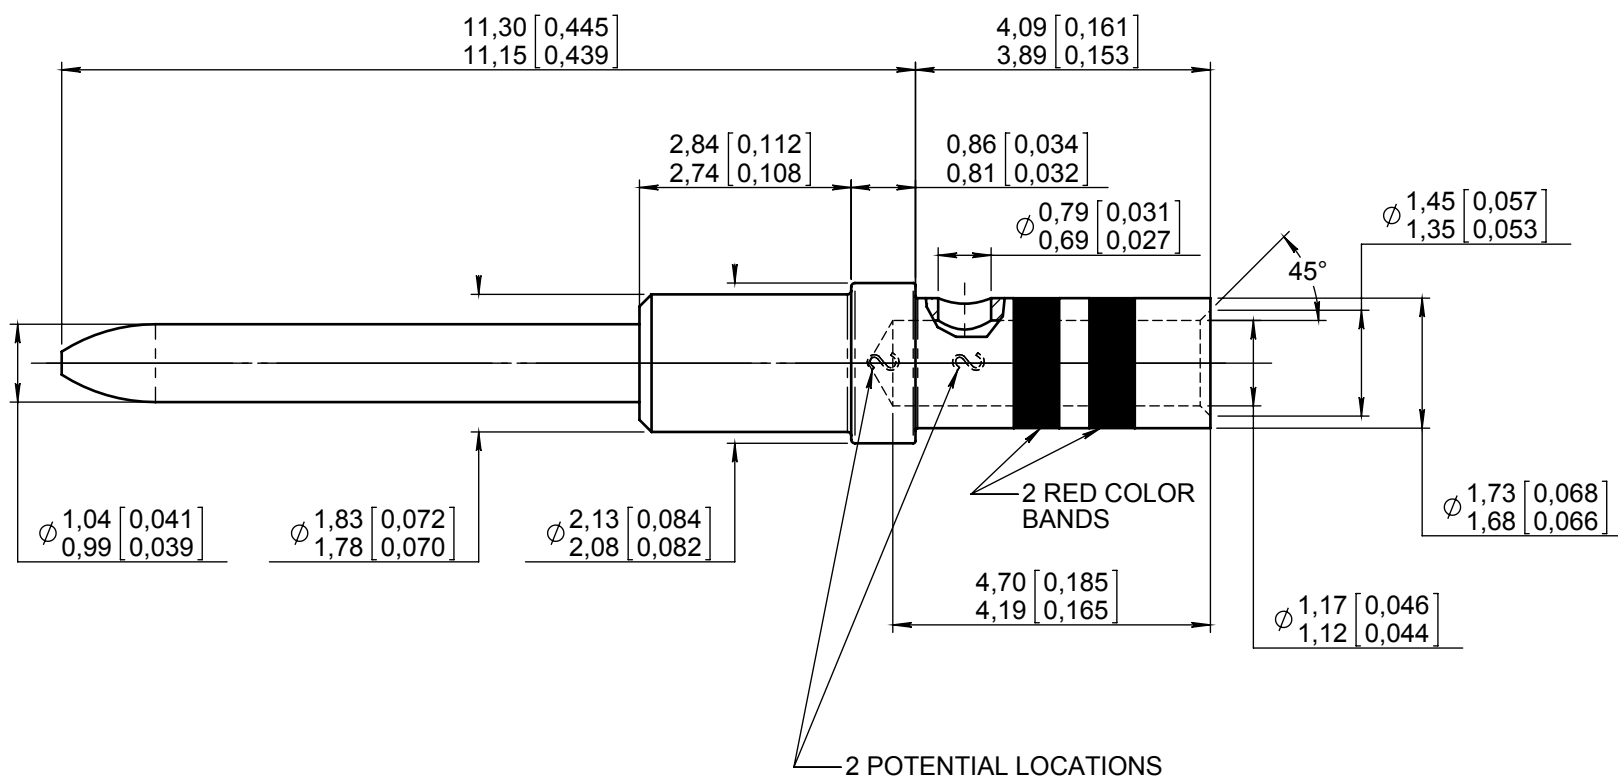

MATERIAL : COPPER ALLOY HARDNESS IN KNOOP 120 MAX (107 HV) FOR CRIMP BARREL
180 MIN (165 HV) FOR BEYOND SHOULDER

FINISH : GOLD PER MIL-G-45204 TYPE I OR II GRADE C OR D CLASS 1 50 MICRONS OVER NICKEL PLATE PER QQ-N-290

WIRES ACCOMODATED : AWG 20-22-24
INSULATOR DIAMETER : 1.80 max. [0.071 max.]
STRIP LENGHT : 4 [0.158]

CRIMP CONTACT TENSILE REQUIREMENTS USING MIL SPEC TOOLING AND WIRE SPEC
MIL-W-81381/12 20 GA. 20 LBS (9 daN)
MIL-W-22759/41 20 GA. 20 LBS (9 daN)
M22520/2-01 20 GA. 20 LBS (9 daN)


CRIMPED CONTACTS WILL SHOW NO CRACK WHEN INSPECTED PER MIL-C-22520 AT 10X

RADIALL TOOLING RECOMMENDATION
CRIMPING TOOL : M22520/2-01 (RADIALL 282 281)
SELECTOR POSITION : 7 FOR AWG 20
6 FOR AWG 22
5 FOR AWG 24

POSITIONER : M22520/2-08 (RADIALL 282 971)

INSERTION/EXTRACTION TOOL : M81969/39-01 (RADIALL 282 522 001)

DIMENSIONS : mm (inch are given for information only)



Estimated weight : 0.19 g

CREATION				
PEN: M970400041A				
NOM: GARCIA L.	Feb. 12, 2014	Insertion/extraction tool P/N updated.	MONTIER A.	LEGLOAHEC Y.
DATE: 08/10/98	Mar 13, 12	Notes updated	CHEVREAU	LE GLOAHEC
APPR.: VERNEAU O.	Nov 28, 06	Redrawn and dimensions modified	PAILOT N.	DUPUIS
	Issue	Revisions	Name	Approved

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from RADIALL. This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112_9311