


Series
EPX

SELECTIVE PLATED SIZE 12 CRIMP SOCKET CONTACT

Issue:
Mar. 02, 2011

Page
1/1

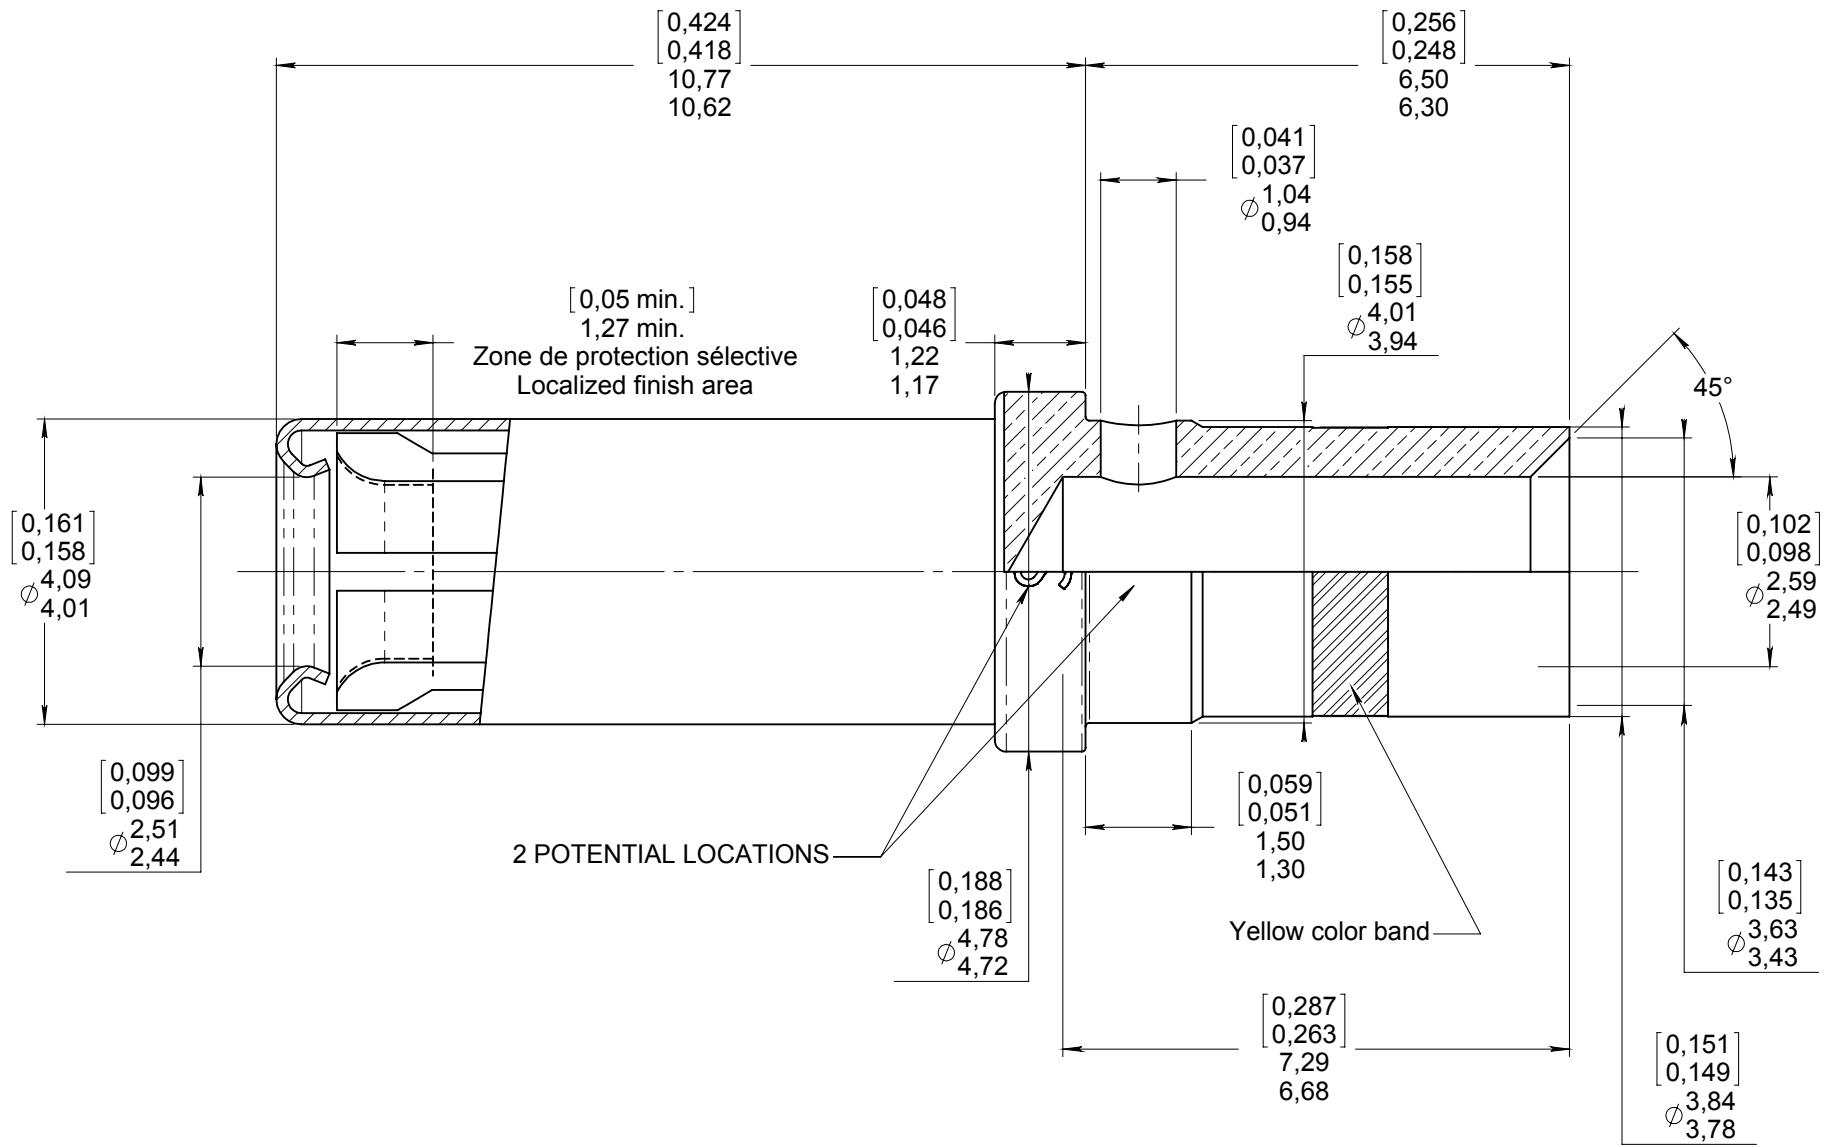

MATERIAL :
CONTACT BODY : BERYLLIUM COPPER PER ASTM B 196
PROTECTION SLEEVE : STAINLESS STEEL PER SAE AMS-5514


FINISH :
LOCALIZED FINISH AREA :
-GOLD PLATED IN ACCORDANCE WITH MIL-DTL-45204, TYPE I OR II, GRADE C OR D, 50 MICROINCH MINIMUM THICK.
ALL OTHER SURFACES OF THE CONTACT BODY :
-GOLD PLATED IN ACCORDANCE WITH MIL-DTL-45204, TYPE I OR II, GRADE C OR D, 10 MICROINCH MINIMUM THICK.
OVER NICKEL ON THE ENTIRE CONTACT BODY SURFACE.

WIRES ACCOMODATED : AWG 12 - 14 - 16
INSULATION DIAMETER : 3.40 max (0.133)
STRIP LENGTH : 0.236 (6)

TOOLING : (ORDERED SEPARATLY)
CRIMPING TOOL : M22520/1-01 (RADIALL P/N : 282 291)
SELECTOR POSITION : 8 FOR AWG 12
7 FOR AWG 14
6 FOR AWG 16

POSITIONER : M22520/1-02 (RADIALL P/N : 282 972)
INSERTION/EXTRACTION TOOL : M81969/14-04 (RADIALL P/N : 282 549 004)

DIMENSIONS : mm (inch are given for information only)



| | | | | |
|------------------------------------------------------------------------------------------|-------|-----------|------|----------|
| CREATION PEN: NOM: OLIVEIRA N. DATE: Mar. 02, 2011 APPR.: LE GLOAHEC | | | | |
| | | | | |
| | | | | |
| | | | | |
| | Issue | Revisions | Name | Approved |

Confidential information not to be disclosed to third parties without Radiall approval. This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112_9311