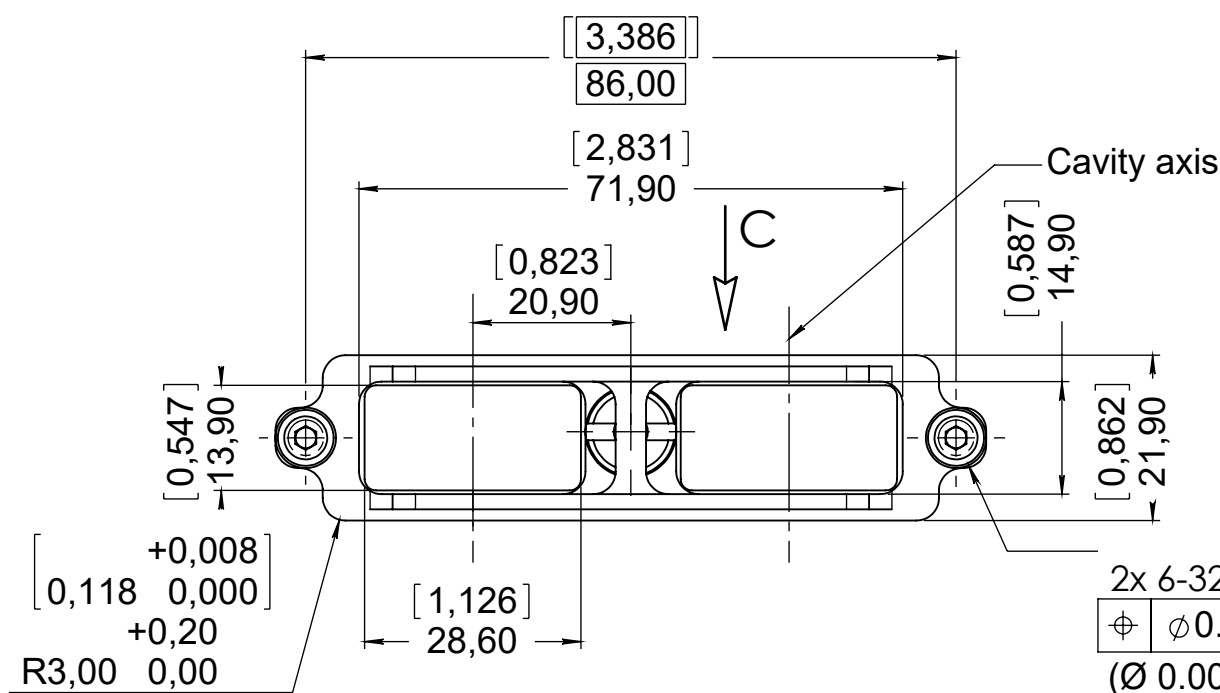
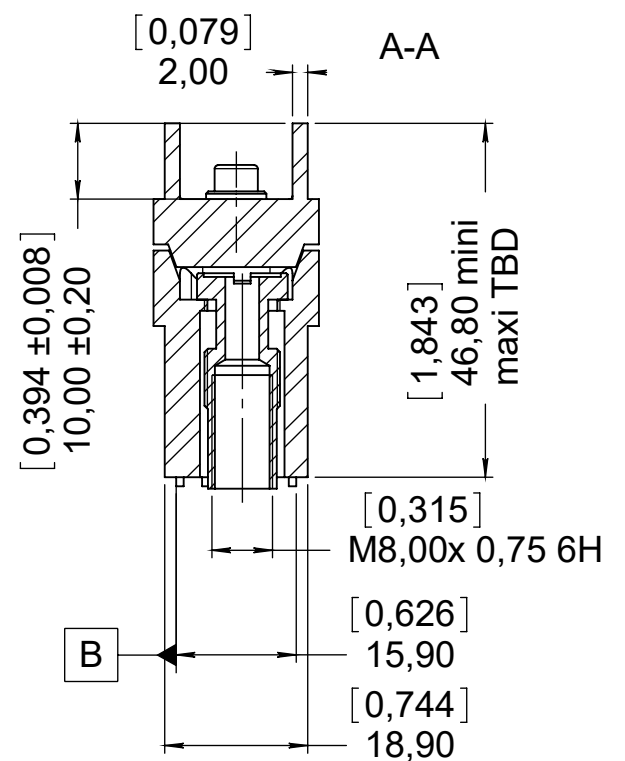
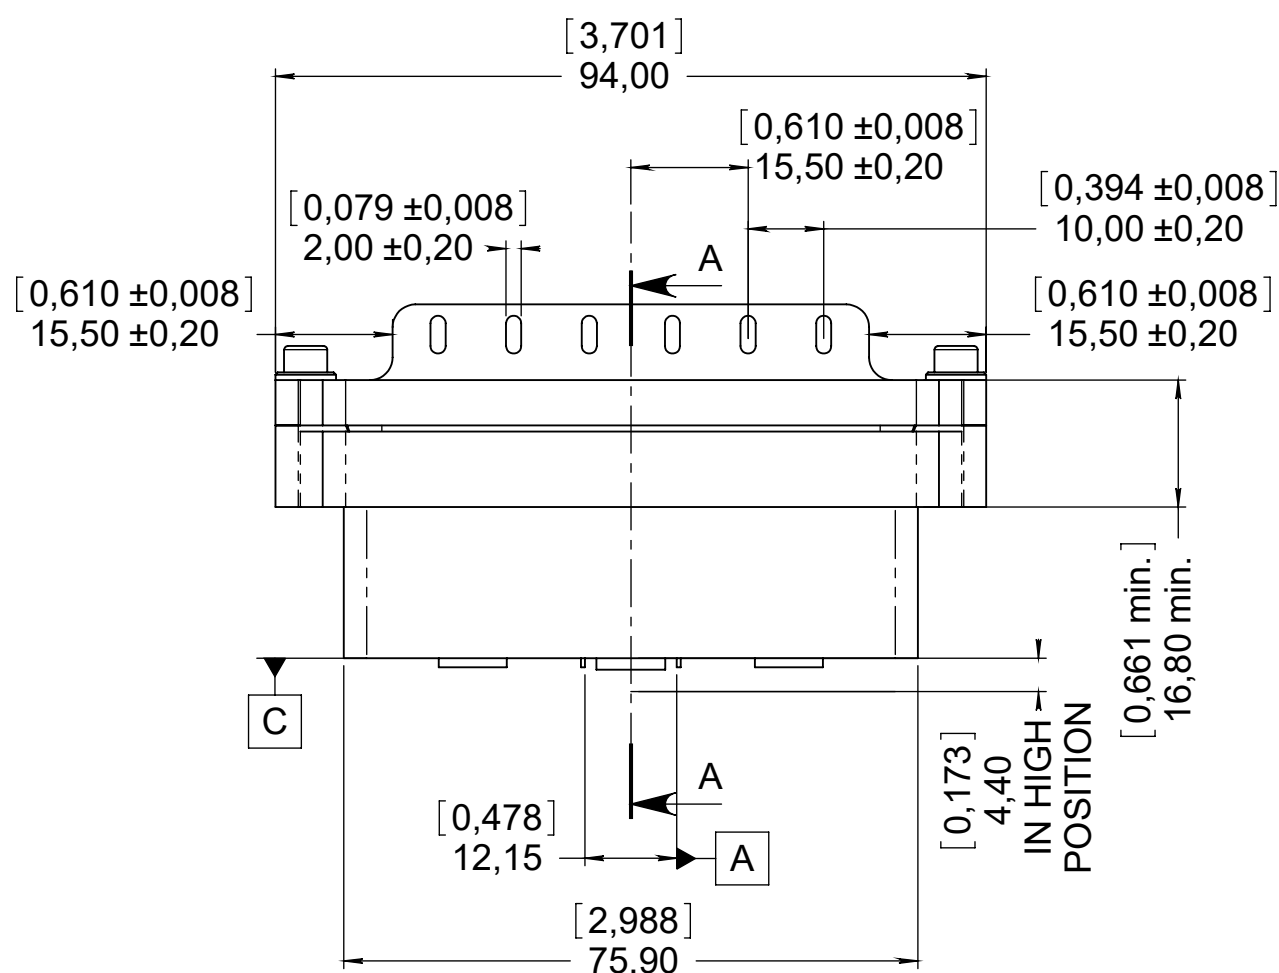
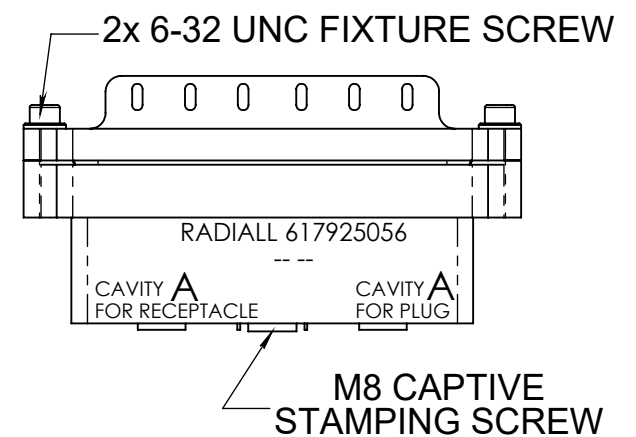


Series
EPXB

SIZE 2 E.M.I. BACKSHELL

Issue:
Sep. 16, 2025Page
1/1

MARKING VIEW C:


**MATERIAL AND FINISH:**

- BACKSHELL: Aluminum Alloy; nickel plated
- CLAMP: Aluminum Alloy; nickel plated
- M8 CAPTIVE STAMPING SCREW: Stainless steel
- WASHER: Stainless steel
- 6-32 UNC FIXTURE SCREW: Stainless steel

NOTES:

- Locking torque for 6-32 UNC fixture screw: 0,70 Nm to 0,80 Nm
- Locking torque for M8 captive stamping screw: 1,2 Nm min
- Tool for fixture screw; RADIAL P/N: 282 664 or 282 665
- Refer to MIBS1700017 for mounting instructions

DIMENSIONS : mm (inch are given for information only)



Estimated weight : 80 g

CREATION

PEN: M99 0400 059B

NOM: Geay S.

DATE: June 28, 2001

APPR.: /

Sep. 16, 25	Format update. Added mounting instructions reference	Valenzuela H.	Weihs H.
Nov. 28, 17	Corrected 6-32 fixture screw locking torque	Legendre T	Legloahec Y
Issue	Revisions	Name	Approved

617925056EN

RADIAL PROPRIETARY INFORMATION