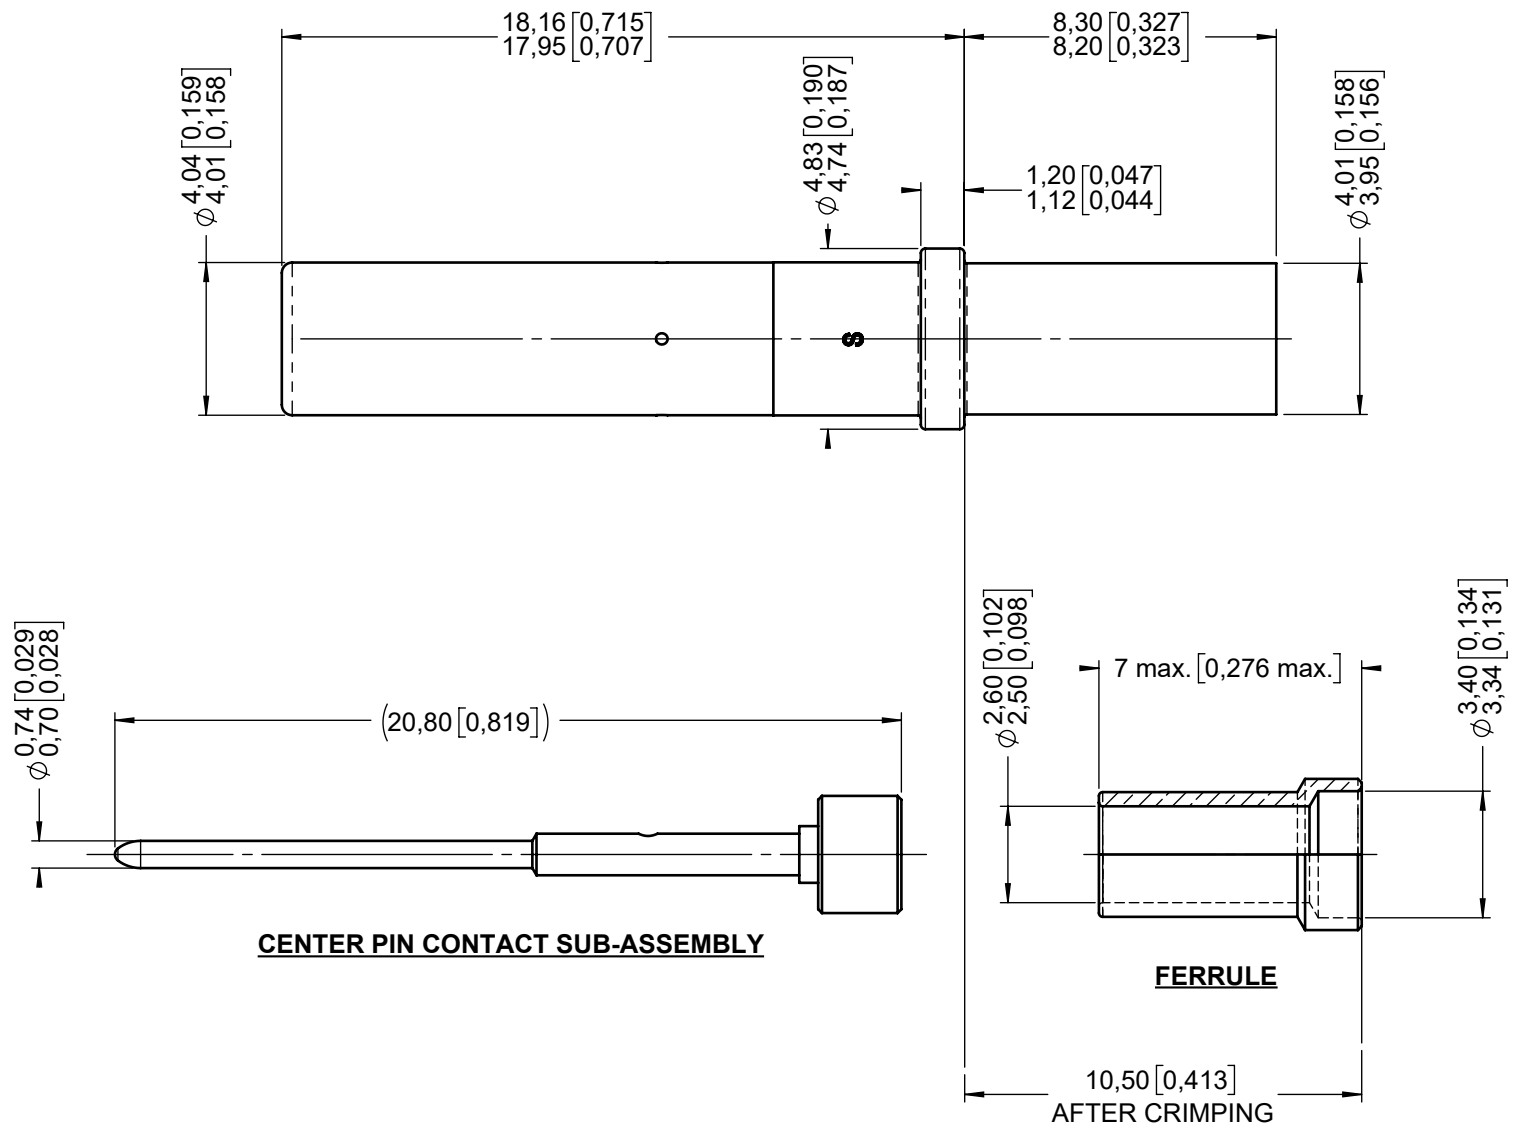


**Series
MPX**
**SIZE 12 SOCKET COAX CONTACT
FOR BUS 3910 AND AXON P503031 CABLES**
**Issue:
May 02, 2019**
**Page
1/1**
OUTER CONTACT SUB-ASSEMBLY

MATERIAL:


- OUTER CONTACT: BERYLLIUM COPPER PER ASTM-B-196
- CENTER CONTACT: LEADED NICKEL COPPER
- INSULATORS: PTFE PER ASTM-D-1710 OR EQUIVALENT
- PROTECTIVE SLEEVE: STAINLESS STEEL PER SAE AMS-5514
- FERRULE: BRASS PER ASTM-B-16 OR ASTM-B-453 OR EN 12164

FINISH:

- OUTER, CENTER CONTACT AND FERRULE: PLATING .00005 INCH OF GOLD PER MIL-DTL-45204 OVER NICKEL PER AMS 2403
- PROTECTIVE SLEEVE: PASSIVATED

WIRING INSTRUCTIONS: SEE MICT0100051

EXTRACTION TOOL: M81969/28-02 (RADIALL 282547). MUST BE ORDERED SEPARATLY

DIMENSIONS : mm (inch are given for information only)


Estimated weight : 1,50 g

CREATION PEN: 89068 NOM: MACARI JP. DATE: Dec. 06, 1991 APPR.:				
	May 02, 19	English translation. Wiring instructions removed and replaced by MICT0100051	RESSAULT	BRANJONNEAU
	Apr. 28, 94	Add cabling on AXON P503031 cable	B GOMBERT	BALDYROU
	Jan. 23, 92	Ø2,45 +0,05 becomes Ø2,54 +0,05	JP MACARI	/
	Issue	Revisions	Name	Approved