



**RADIALL®**  
MULTICONTACT CONNECTORS

**TECHNICAL DATA SHEET**


**619 069 002**

Series  
B PX

SIZE 8 CONCENTRIQUE TWINAX SOCKET CONTACT  
FOR MIL-C-17/176-00002 CABLE

Issue:  
06 NOV. 2003

Page  
1/1

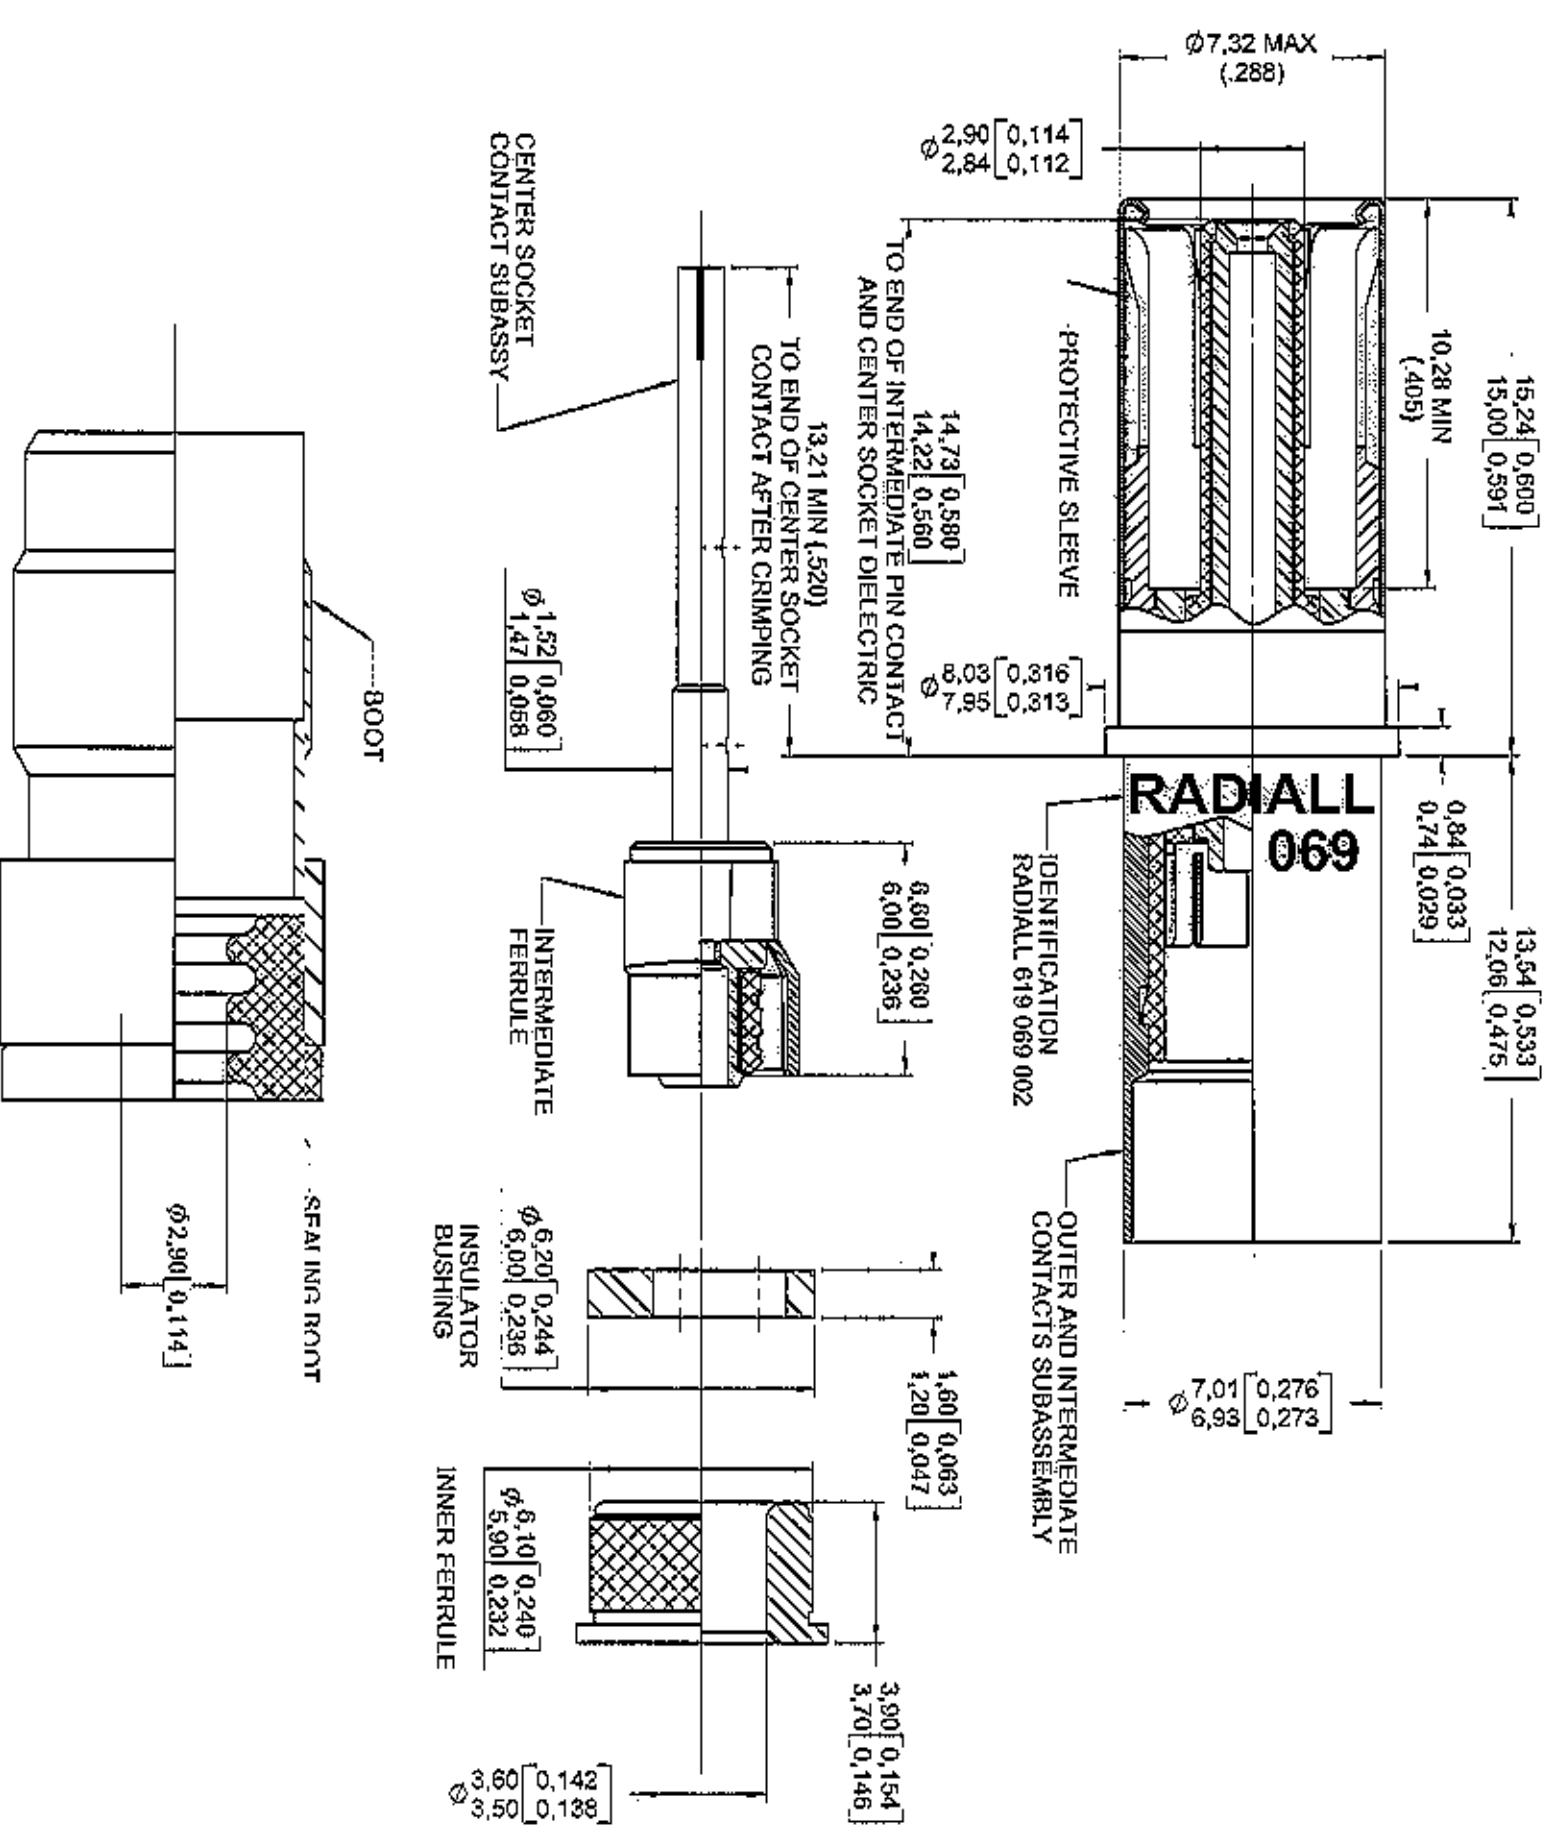

- MATERIALS:**
- OUTER AND CENTER CONTACT: BERYLLIUM COPPER ALLOY PER QQ-C-530 HEAT TREATED ANNEALED ON CRIMP BARREL
  - INTERMEDIATE CONTACT: BERYLLIUM COPPER ALLOY PER QQ-C-530 HEAT TREATED
  - FERRULE AND INNER FERRULE: BRASS PER QQ-B-626
  - INTERMEDIATE DIELECTRIC AND INSULATOR BUSHING: PTFE
  - CENTER DIELECTRIC: ULTEM
  - PROTECTIVE SLEEVE: STAINLESS STEEL AISI305
  - BOOT: THERMOPLASTIC PER MIL-M-14
  - SEALING BOOT: FLUROSILICONE ELASTOMER PER MIL-R-25988 OR ZZ-R-765

**FINISHES (ALL METAL PARTS)**  
- GOLD PER MIL-G-45204, TYPE II, GRADE C, CLASS 1 OVER NICKEL PER QQ-N-290, CLASS 2

**WIRING INSTRUCTIONS: SEE RP08820**

**DIMENSIONS : mm (inch)** -

<b>CREATION</b>					
PEN:	M030400043A				
NOM:	LEGENBRE				
DATE:	06/11/03				
APPR.:	MACABR				
619069002EN		Issue	Revisions	Name	Approved