


Series  
**NSX**

SIZE 1 COAX PIN CONTACT  
FOR ASN-E0692 WN AND ASN-E0406 WD CABLE (FOR 71C1 INSERT)

Issue:  
Jan. 20, 2010

Page  
**1/1**

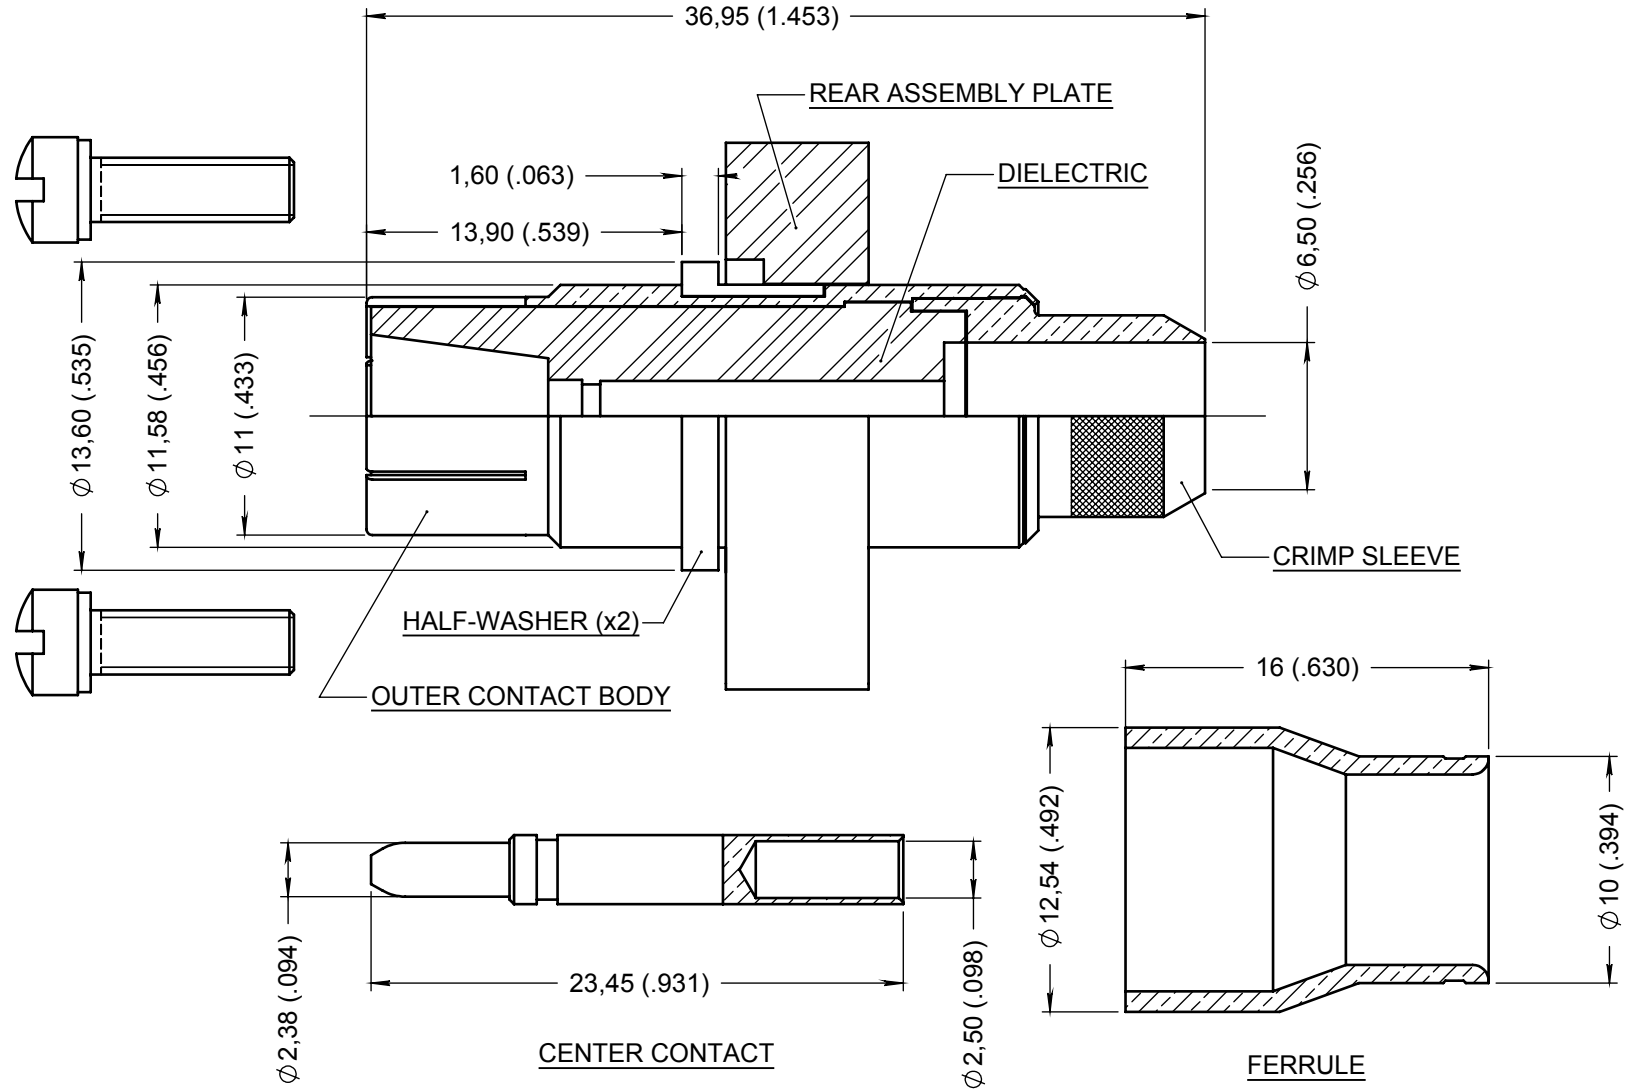

**WIRING INSTRUCTIONS: SEA DRAWING RP57483**


**MATERIAL:**

- OUTER CONTACT BODY: BERYLLIUM COPPER PER ASTM-B-196
- DIELECTRIC: PTFE PER ASTM-D-1710 OR EQUIVALENT
- CRIMP SLEEVE AND CENTER CONTACT: BRASS PER ASTM-B-16 / B-16M
- FERRULE: ANNEALED BRASS
- HALF-WASHERS: ALUMINUM ALLOY PER SAE AMS-QQ-A-250
- REAR ASSEMBLY PLATE: ALUMINUM ALLOY PER QQ-A-200 OR 591
- SCREWS: STAINLESS STEEL

**FINISH:**

- OUTER CONTACT BODY, CRIMP SLEEVE, CENTER CONTACT AND FERRULE:  
PLATING .00005 INCH OF GOLD PER MIL-G-45204 TYPE I OR II GRADE C OR D CLASS 1  
OVER NICKEL QQ-N-290
- HALF-WASHERS: CADMIUM PLATED
  
- IMPEDANCE: 50 OHMS

**DIMENSIONS : mm (inch are given for information only)**



This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112\_9311

CREATION				
PEN: M03 0004 070A NOM: MONDOT JC. DATE: APRI 07, 04 APPR.: LAHOREAU C.	Jan. 20, 10	Improved ferrule inner diameter	Legendre T.	Brochet L.
	09/14/04	MODIFIED THE REFERENCE OF FERRULE	MONDOT	LAHOREAU
	08/31/04	ADDED SCREWS, WASHERS AND REAR ASSEMBLY PLATE	MONDOT	MACARI
	06/07/04	GENERAL MODIFICATION	MONDOT	MACARI
	Issue	Revisions	Name	Approved