


Series
NSX

SIZE 1 COAXIAL PIN CONTACT
FOR CABLE NGC875BAR-1

Issue:
Dec. 08, 2015

Page
1/1

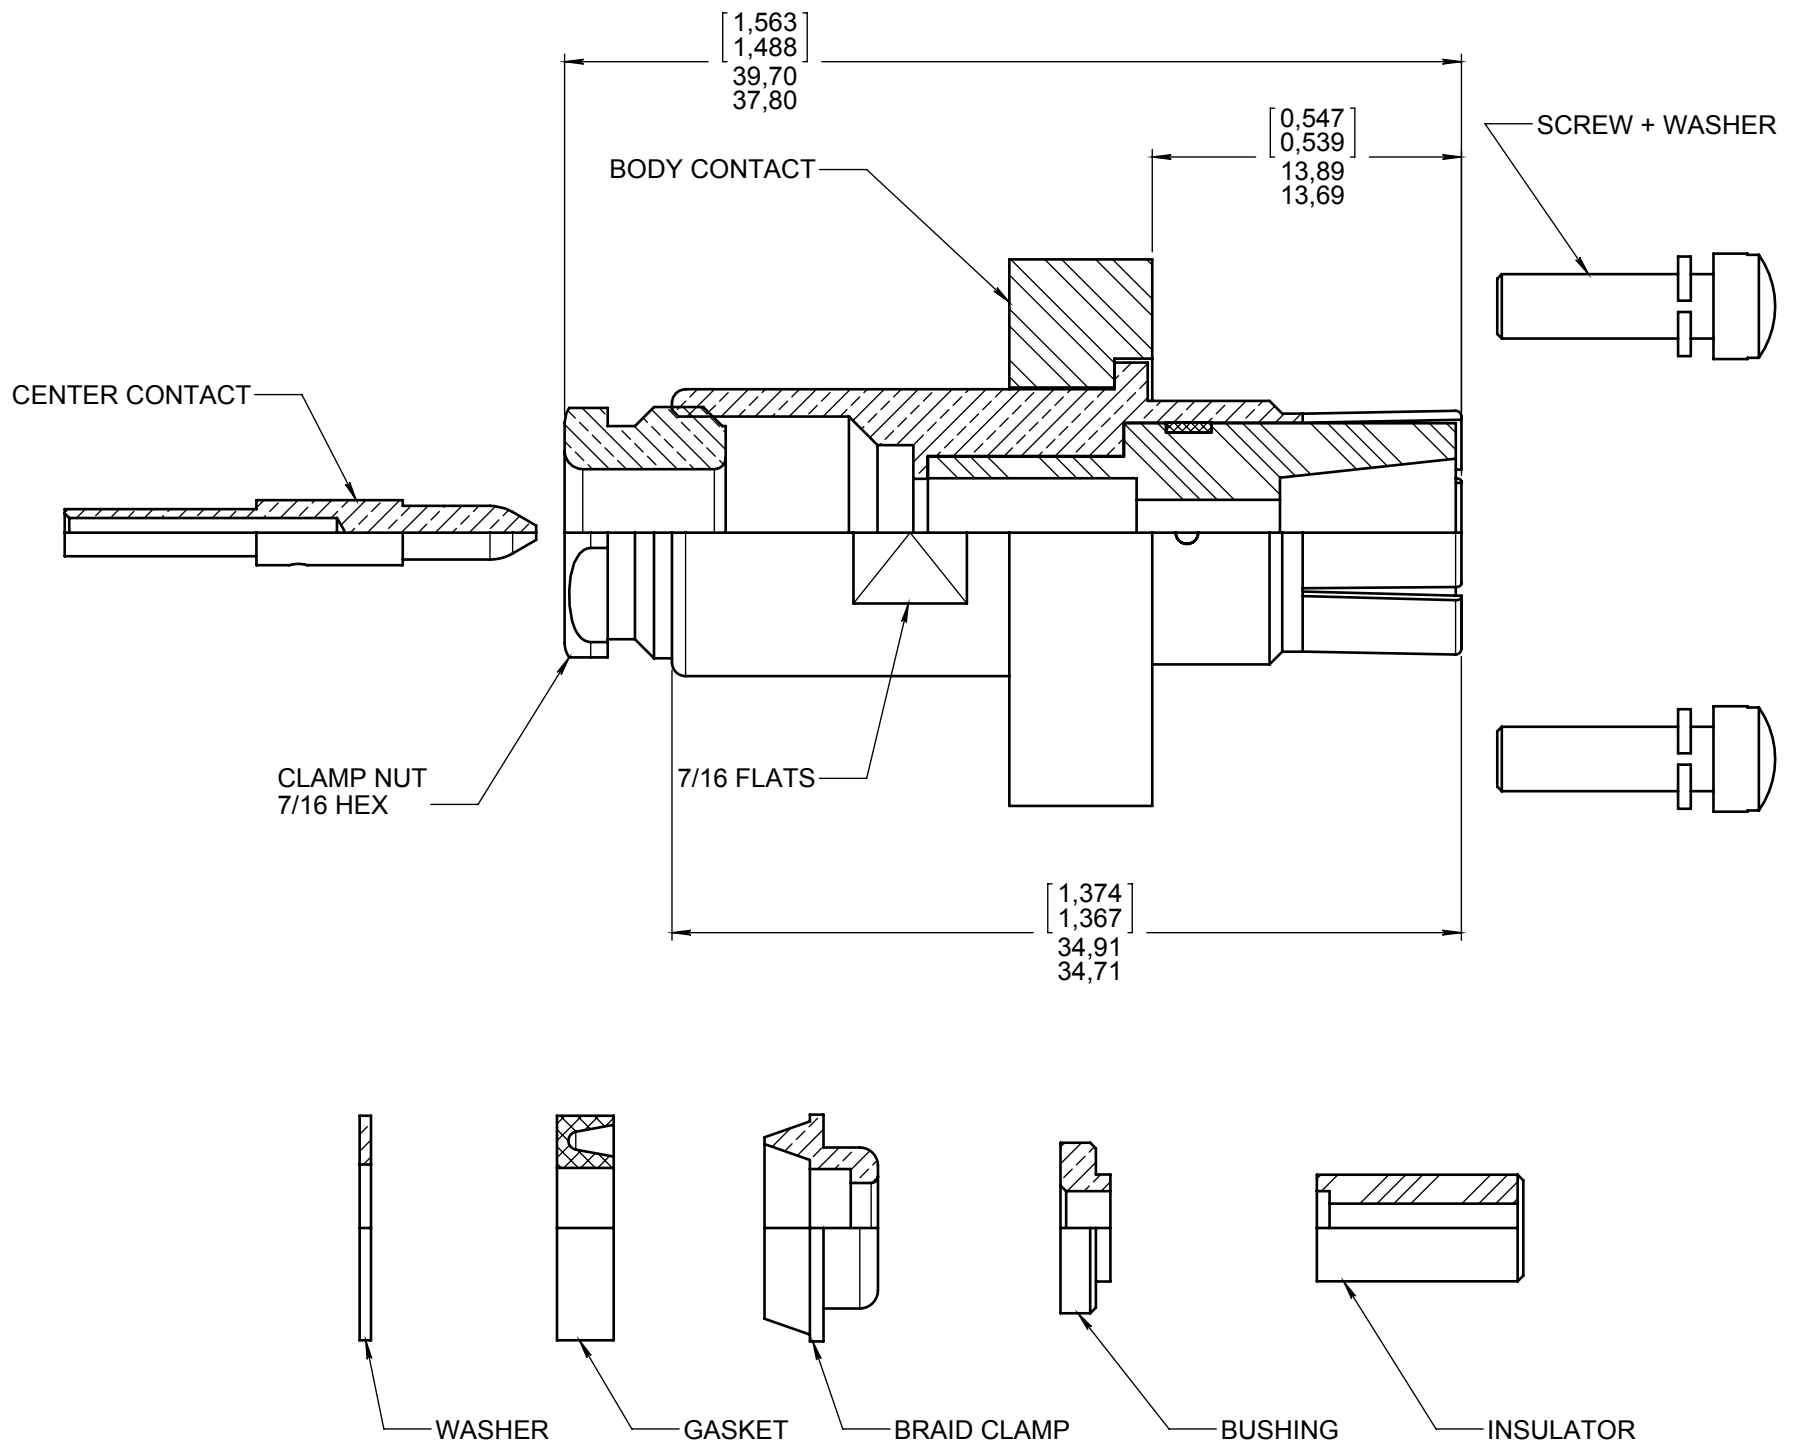

MATERIAL :

- OUTER CONTACT, CLAMP NUT, WASHER, BUSHING AND BRAID CLAMP : BRASS PER ASTM B 16 OR ASTM B 453 OR EN 12164
- CENTER CONTACT : BERYLLIUM COPPER PER ASTM B 196
- INSULATOR : PTFE PER ASTM D 1710 OR EQUIVALENT
- RETAINING BLOCK : ALUMINUM ALLOY PER SAE AMS-QQ-A-250
- SCREWS AND WASHERS : CORROSION RESISTANT MATERIAL
- GASKET : FLUOROSILICONE PER SAE AMS-R-25988


FINISH :

- ALL METALIC PARTS : PLATING .00005 INCH OF GOLD PER MIL-DTL-45204 OVER NICKEL PER AMS 2403
- RETAINING BLOCK : BLACK ANODIZED PER MIL-A-8625

WIRING INSTRUCTION :

- SEE WIRING INSTRUCTION : MI CT 01 00031

DIMENSIONS : mm (inch are given for information only)



Estimated weight : 32 g

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from RADIALL. This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112_9311

CREATION				
PEN: 20141287-30A				
NOM: RAMOS D.				
DATE: April 29, 2014				
APPR.: LEGENDRE T.	Dec. 08, 15	Dimensions added	Zuniga F.	Ramos D.
	Issue	Revisions	Name	Approved