


Series
NSX

SIZE 8 CRIMP TRIAX SOCKET CONTACT
FOR DMS2352 TRIAX CABLE
5D0572-1

Issue:
March 30, 2007

Page
1/1

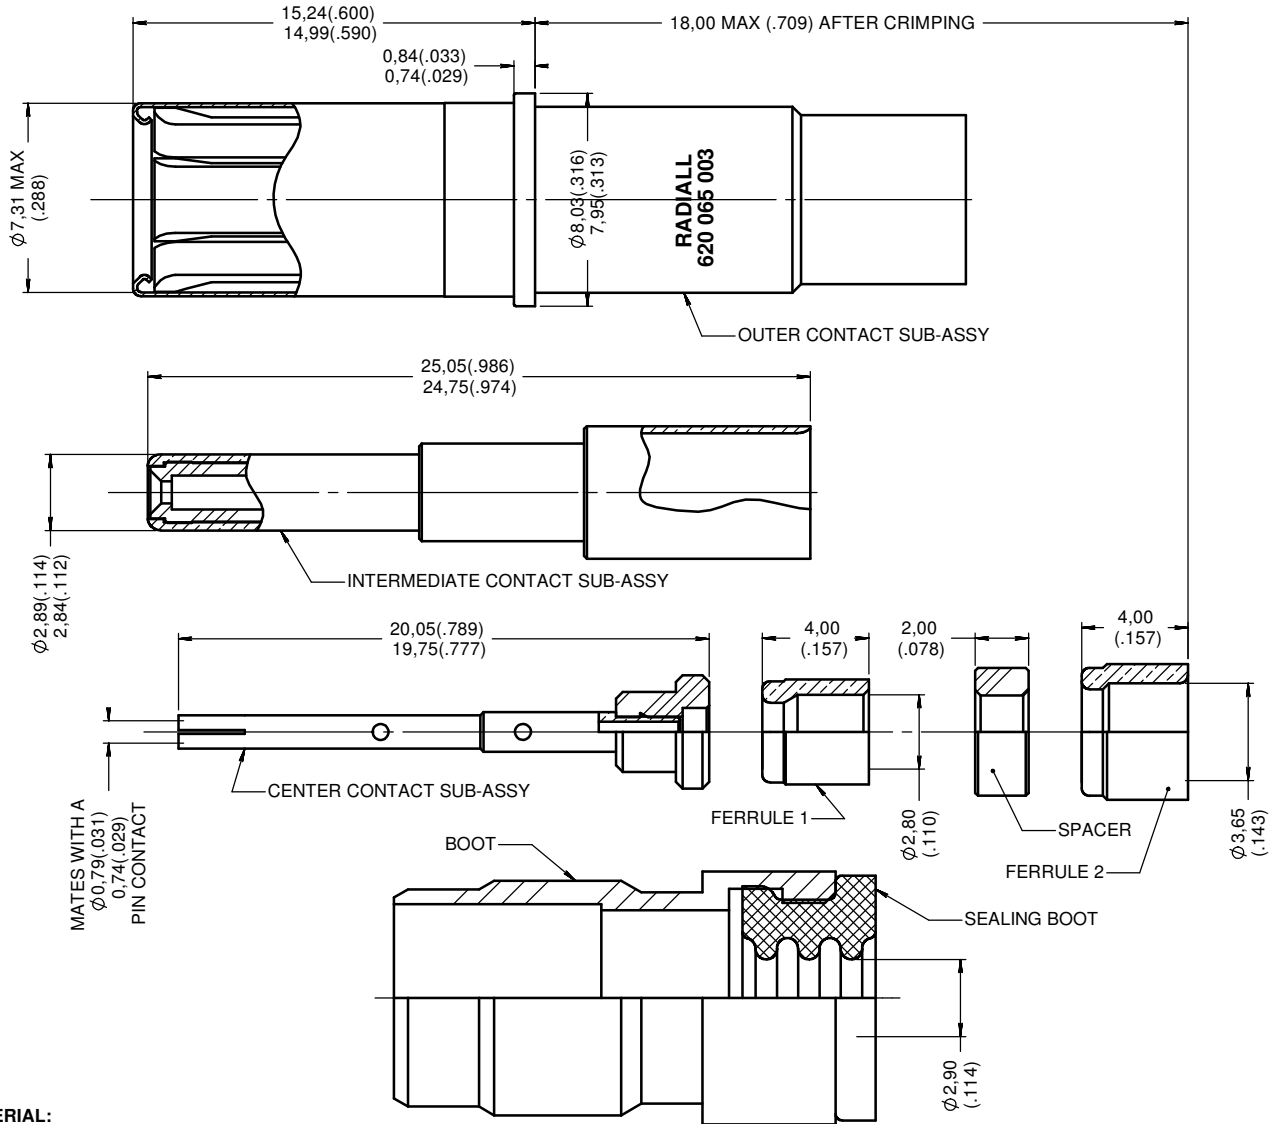

MATERIAL:

OUTER CONTACT: BERYLLIUM COPPER PER ASTM-B-196
INTERMEDIATE CONTACT: LEADED NICKEL COPPER (C97)
CENTER CONTACT: BERYLLIUM COPPER PER ASTM-B-196
FERRULES: BRASS PER ASTM-B-16
DIELECTRIC AND SPACER: PTFE PER ASTM-D-1710 OR EQUIVALENT
PROTECTIVE SLEEVE: STAINLESS STEEL PER SAE AMS-5514
BOOT: THERMOPLASTIC PER ASTM D 5205
SEALING BOOT: FLUOROSILICONE ELASTOMER PER SAE AMS-25988

FINISH:

CONTACTS AND FERRULES: GOLD PER SAE AMS-2422 OVER ELECTROLESS NICKEL PER SAE AMS-QQ-N-290
PROTECTIVE SLEEVE: PASSIVATED


TOOLING:

(WIRING INSTRUCTION SEE RP57028)
CENTER CONTACT: CRIMPING TOOL M22520/2.01
POSITIONER RADIALL 282 581 011
INTERMEDIATE AND OUTER CONTACTS: CRIMPING TOOL M22520/5.01
DIE M22520/5.05
EXTRACTION TOOL: M81969/28-03

MARKING:

ON PACKAGING : RADIALL + 620 065 003 + 5D0572-1

DIMENSIONS : mm (inch are given for information only)



This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112_9311

CREATION PEN: NOM: MACARI JP. DATE: 23 JULY 2003 APPR.: MONDOT JC.				
	Mar. 30, 07	Updated Marking and Specifications	Legendre T.	Lahoreau C.
	27 OCT.03	POSITIONER 282 581 011 WAS RP57029	MACARI	DUPUIS
	Issue	Revisions	Name	Approved