

**Series
NSX**

**SIZE 1 SEALED COAXIAL SOCKET CONTACT
WITH TNC ADAPTER
BOEING P/N: BACC47EN4**

**Issue:
Aug. 12, 2026**

**Page
1/1**


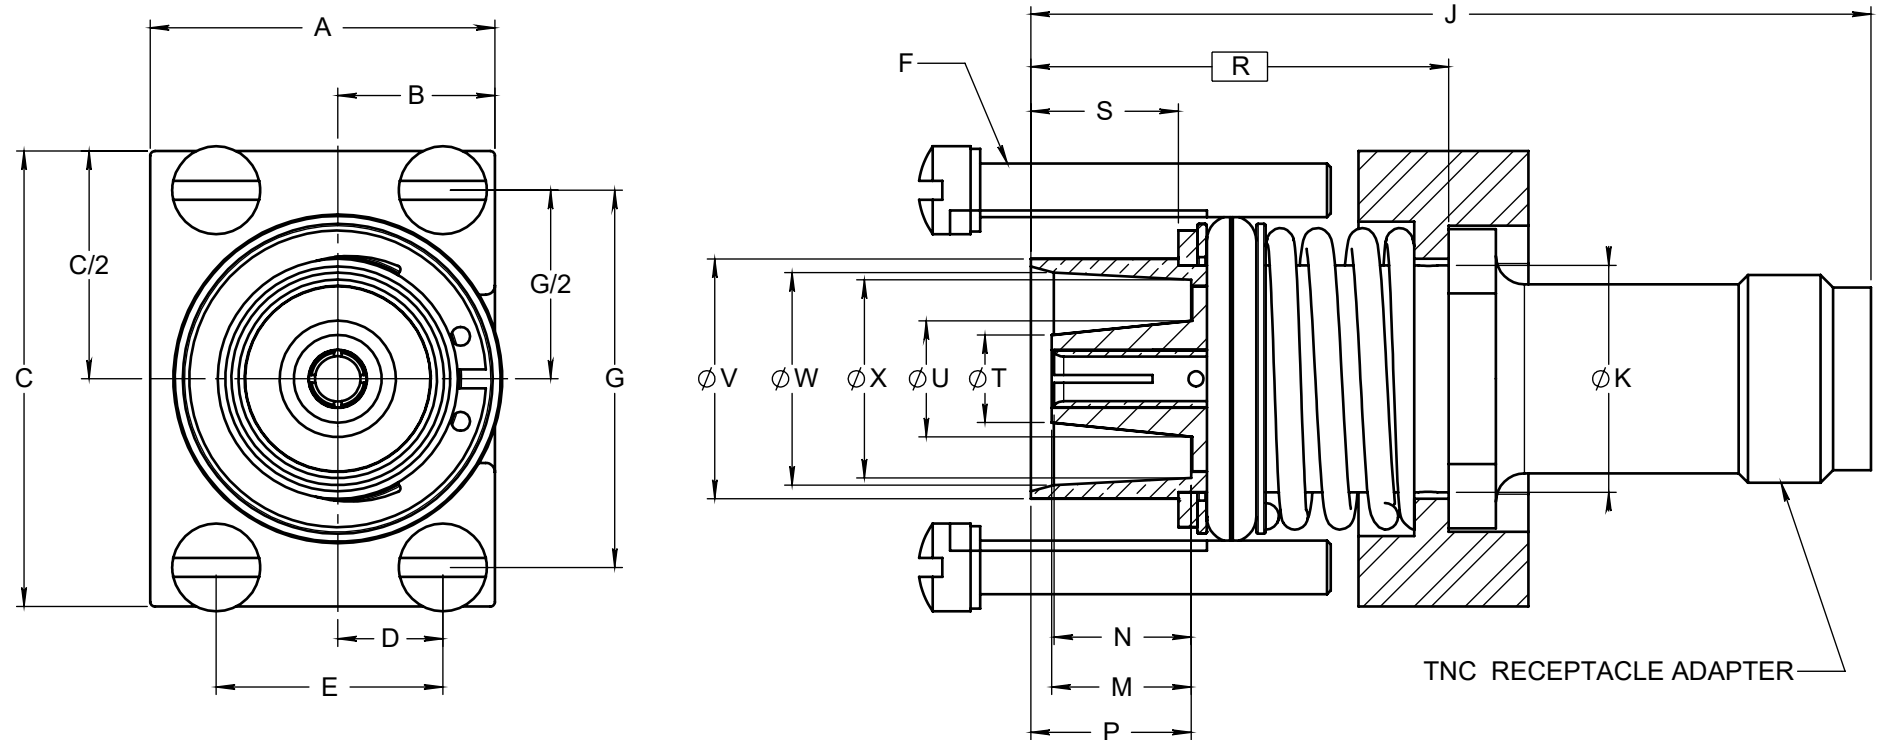


TABLE 1


A	B	C	D	E	F	G	J	ØK	
18,36(,723)	8,36(,329)	24,21(,953)	5,64(,222)	12,12(,477)	4-40 UNC	20,12(,792)	45,72(1,80)	12,10(,476)	
18,24(,718)	8,28(,326)	24,10(,949)	5,51(,217)	11,89(,468)		19,89(,783)	MAX	12,00(,472)	
M	N	P	R	S	ØT	ØU	ØV	ØW	ØX
7,49(,295)	7,44(,293)	8,53(,336)	22,10(,870)	7,87(,310)	4,80(,189)	6,20(,244)	12,75(,502)	11,32(,446)	10,55(,415)
MAX	MAX	8,43(,332)	DATUM	7,77(,306)	MAX	MAX	12,65(,498)	11,18(,440)	10,45(,411)

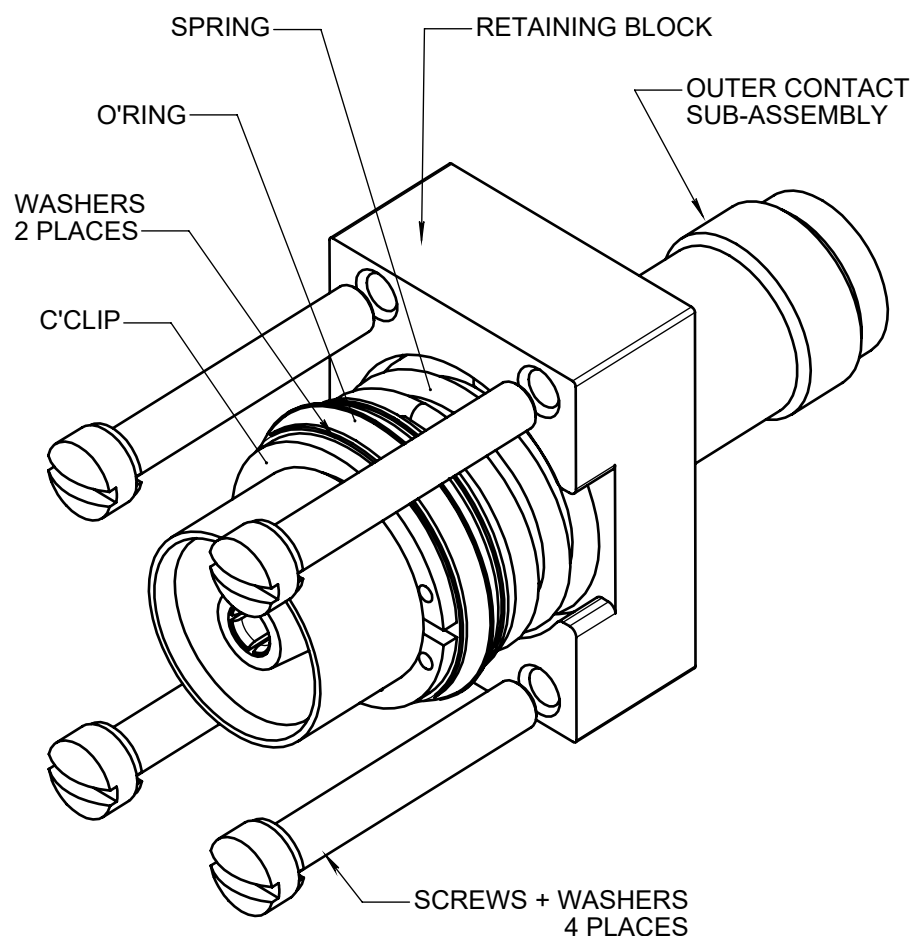

MATERIAL AND FINISH:

- OUTER BODY:
BRASS PER ASTM B 16 OR ASTM B 453 OR EN12164
GOLD PLATE PER AMS 2422 OVER NICKEL PER QQ N 290
- CENTER CONTACT:
BERYLLIUM COPPER PER ASTM B 196
GOLD PLATE PER AMS 2422 OVER NICKEL PER QQ N 290
- INSULATOR:
PTFE PER ASTM D 1710 OR EQUIVALENT
- O-RING SEAL:
FLUOROSILICONE PER SAE AMS R 25988
- RETAINING BLOCK:
ALUMINUM ALLOY PER AMS QQ A 591
BLACK ANODIC OXYDATION
- SCREWS, WASHERS, C'CLIP AND SPRING:
STAINLESS STEEL
PASSIVATED

DIMENSIONS : mm (inch are given for information only)



Estimated weight : 36,51 g

CREATION				
PEN:				
NOM: FALETTI				
DATE: 27 JULY 92	Aug. 12, 26	Format update, dimension R corrected	Valenzuela H.	Ramos D.
CHEC.:	23 APR.07	REDRAWN	MACARI	/
	Issue	Revisions	Name	Checked

620101003EN

RADIAL PROPRIETARY INFORMATION

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from RADIAL. This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112_9311