




Series
NSX

ENVIRONMENTAL SIZE 5 PIN COAX CONTACT
FOR RG58, RG141 AND KX15 CABLES

Issue:
01 OCT.04

Page
1/1

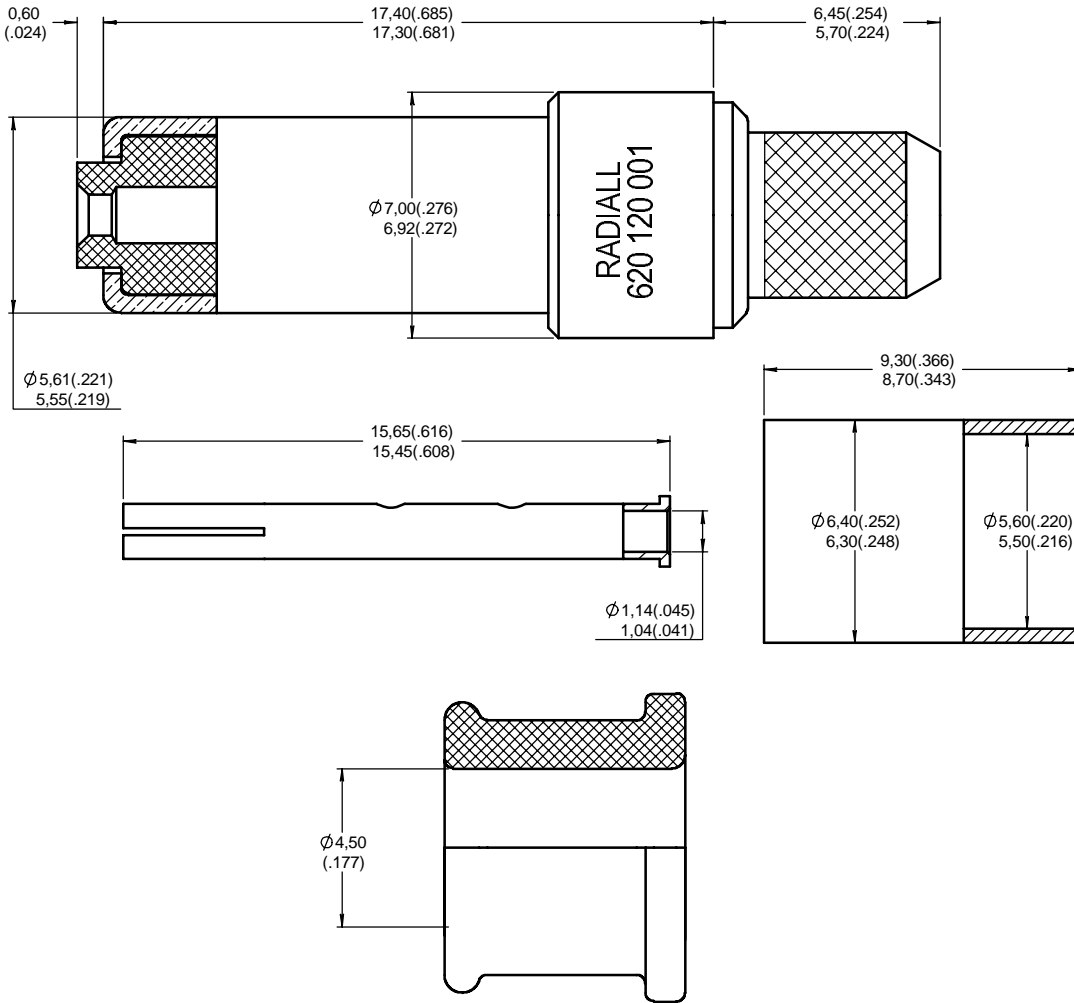

MATERIAL:
 OUTER CONTACT: BRASS PER QQ-B-626
 CENTER CONTACT: BERYLLIUM COPPER PER ASTM-B-196
 FERRULE: ANNEALED BRASS
 DIELECTRIC: PTFE PER ASTM-D-1710 OR EQUIVALENT
 SEALING BOOTH: FLUOROSILICONE ELASTOMER PER MIL-R-25988
 OR PER ZZ-R-765


REQUIREMENTS:
 IMPEDANCE: 50 OHMS NOMINAL
 FREQUENCY RANGE: 0 TO 500 MHz
 VSWR: 1.10/1 FREQUENCY 0 TO 300 MHz
 VSWR: 1.30/1 FREQUENCY 300 TO 500 MHz
 RATED VOLTAGE: 325 V RMS AT SEA LEVEL
 DIELECTRIC WITHSTANDING VOLTAGE: 750 V RMS AT SEA LEVEL
 TEMPERATURE RANGE: -65°C TO +165°C

FINISH:
 ALL METAL PARTS: GOLD PER MIL-G-45204, TYPE I OR II,
 GRADE C OR D, CLASS1 OVER NICKEL PER QQ-N-290

EXTRACTION TOOL: M81969/28-01 (RADIALL 282 946)

WIRING INSTRUCTIONS: SEE RP57483

DIMENSIONS : mm (inch) -



This information is given as an indication in the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112_9311

CREATION				
PEN:				
NOM: MACARI				
DATE: 01 OCT.04				
APPR.: MONDOT	/	/	/	/
Issue		Revisions	Name	Approved

620120001EN