

Series  
NSX


NONENVIRONMENTAL SIZE 8 QUADRAX PIN CONTACT  
FOR QUADRAX GORE CABLE P/N : GSC-03-84198-00

Issue:  
June 03, 2025


Page  
1/1

**DESIGNED PER ARINC 600**


**CENTERING BOOT**



**OUTER CONTACT**

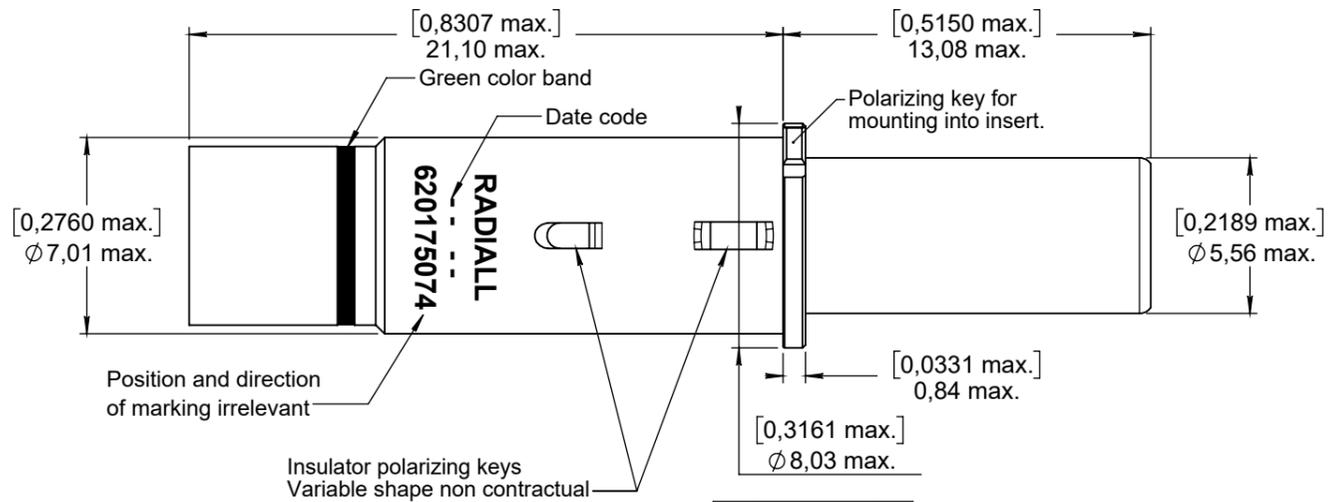


**INSULATOR**




Polarizing key way.



**FERRULE**

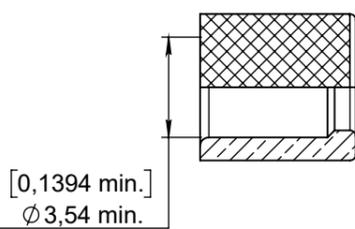

**SPACER**

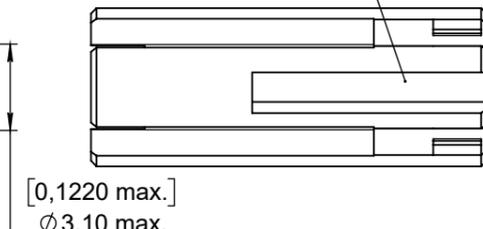

**CENTER CONTACTS**

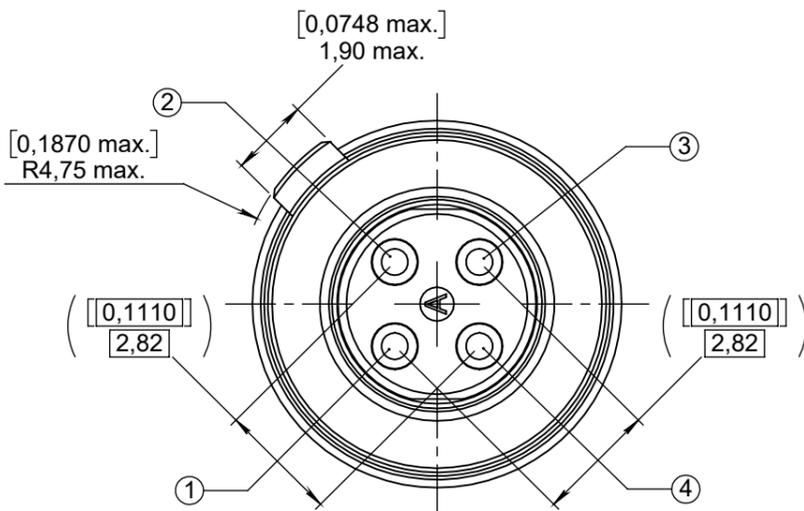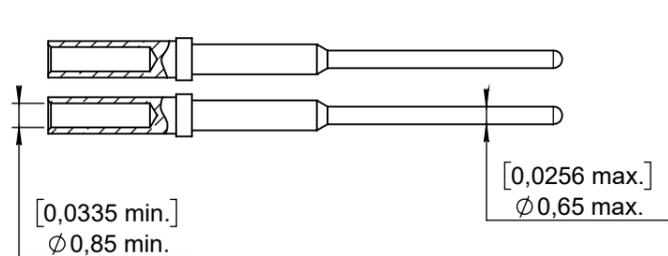

**ENGAGING FACE**

**MATERIAL :**

- Outer contact, center contact and ferrule : copper alloy
- Insulator : PTFE or suitable material
- Spacer : thermoplastic or suitable material
- Centering boot : PTFE or suitable material

**FINISH :**

- Outer contact : 0,80 $\mu$ m (.000031") mini of gold over nickel
- Center contact : 1,27 $\mu$ m (.000050") mini of gold over nickel
- Outer contact : 0,50 $\mu$ m (.000020") mini of gold over nickel


**EXTRACTION TOOL :**

- Metallic tool : M81969/28-03 (RADIALL : 282549001)
- Plastic tool : M81969/14-06

**WIRING INSTRUCTIONS :**

- RP55178

DIMENSIONS : mm (inch are given for information only)



Estimated weight : 4,50 g

**CREATION**

PEN: 24012491-10A

NOM: Legeay H.

DATE: June 03, 2025

CHEC.: Legendre T.

Issue	Revisions	Name	Checked

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from RADIALL. This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112\_9311