
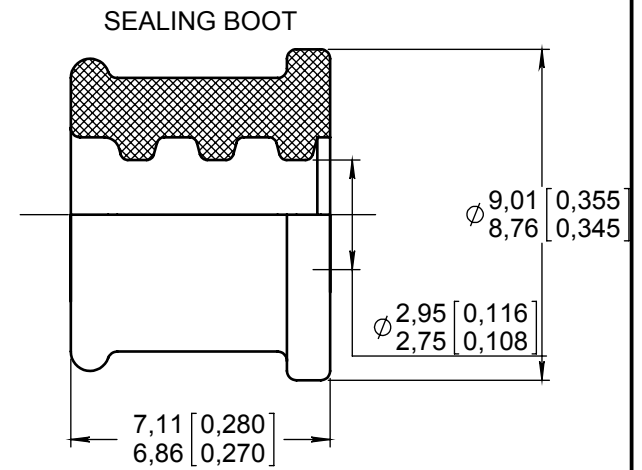
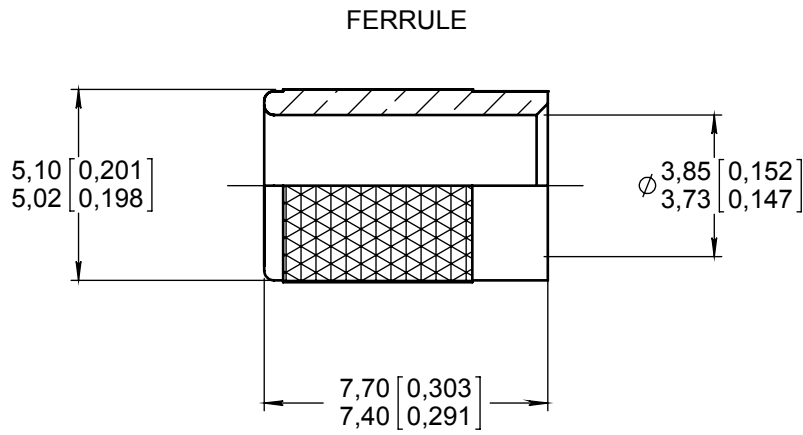
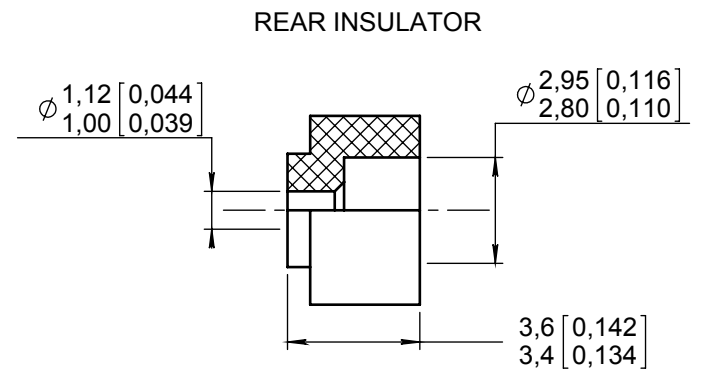
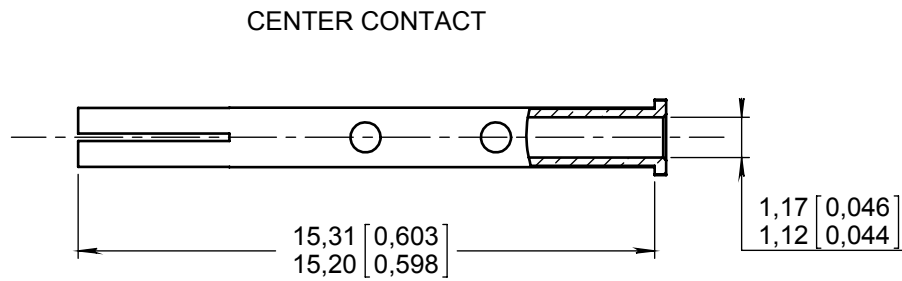


Series
NSX

SIZE 5 PIN COAX CONTACT
FOR S280W503-2 CABLE
BOEING P/N : BACC47EV-4

Issue:
Feb. 11, 11

Page
1/1

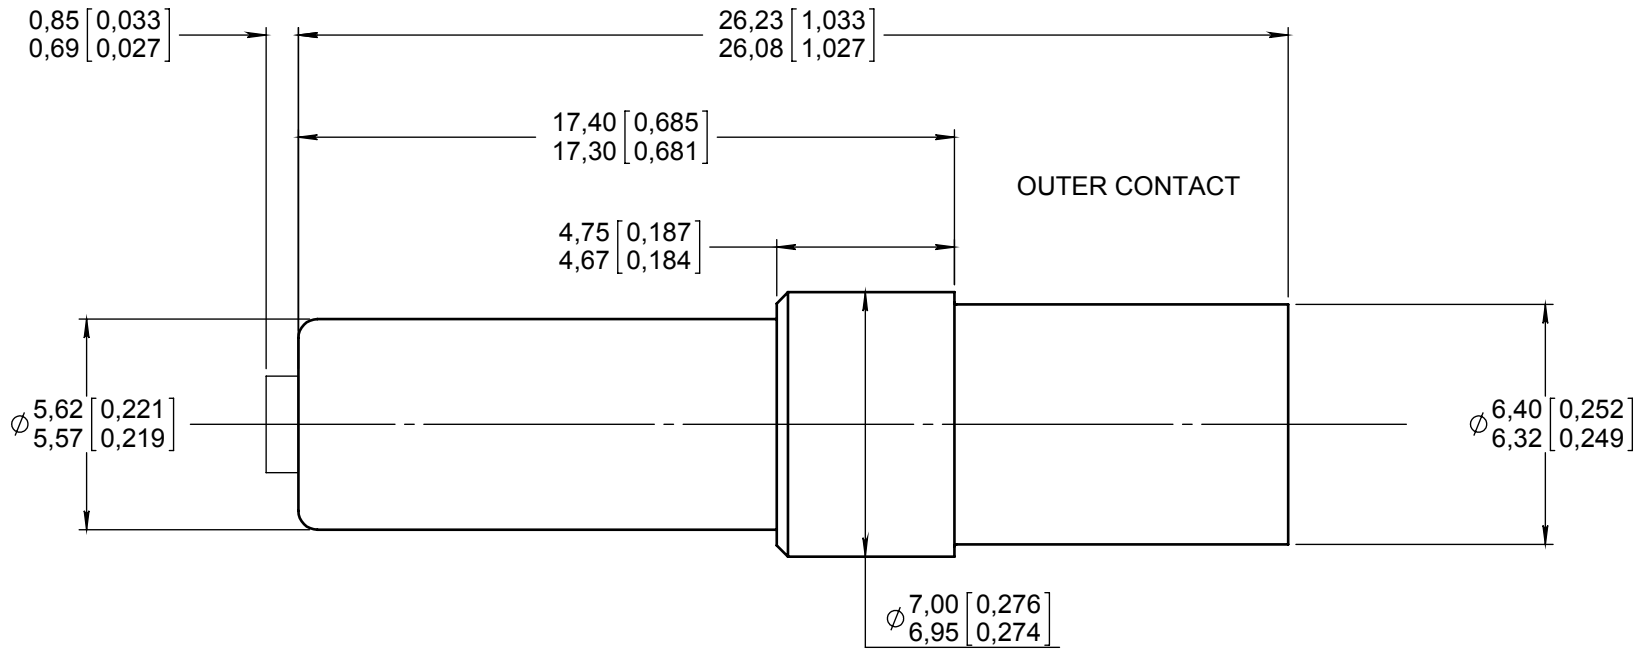

MATERIAL :

- OUTER CONTACT : BRASS PER QQ-B 626
- INSULATOR : TPFE
- CENTER CONTACT : BERYLLIUM COPPER HEAT TREATED FOR SPRING TINES ANNEALED ON CRIMP BARREL
- FERRULE : BRASS
- SEALING BOOT : SILICONE ELASTOMER

FINISH (ALL METAL PARTS)


GOLD PLATE PER MIL_G_45204:50 MICROINCHES OVER NICKEL

DESIGN REQUIREMENTS

- TEMPERATURE RANGE : -65°C TO 165°C
- IMPEDANCE : 50 OHMS NOMINAL
- RATED VOLTAGE : 325 V RMS AT SEA LEVEL
- VSWR : 1,30 : 1
- FREQUENCY RANGE : 0 - 500 MHZ
- CONTACT RESISTANCE : 1.0 MILLIOHMS MAX (OUTER CONTACT)
- DIELECTRIC WITHSTANDING VOLTAGE : 750 VRMS AT SEA LEVEL

CONTACT SHALL ASSEMBLE USING TOOLING AND STRIP LENGTHS ACCORDING TO RP08710

DIMENSIONS : mm (inch are given for information only)



This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112_9311

CREATION				
PEN:				
NOM: MACARI JP.				
DATE: 23 DEC 1993	Feb.11,11	Plan refait sur SdW	Moutault	Brochet
APPR.: CARTESSSE	09/02/94	Change ferrule shape Ø0.201/0.198 was Ø0.193/0.191 and Ø0.152/0.147 was Ø0.150/0.147	JP Macari	Cartesse
	Issue	Revisions	Name	Approved