


Series  
**NSX**

SIZE 16 FRONT RELEASE, FRONT REMOVABLE  
PC POST PIN CONTACTS

Issue:  
Dec. 16, 2008

Page  
**1/1**

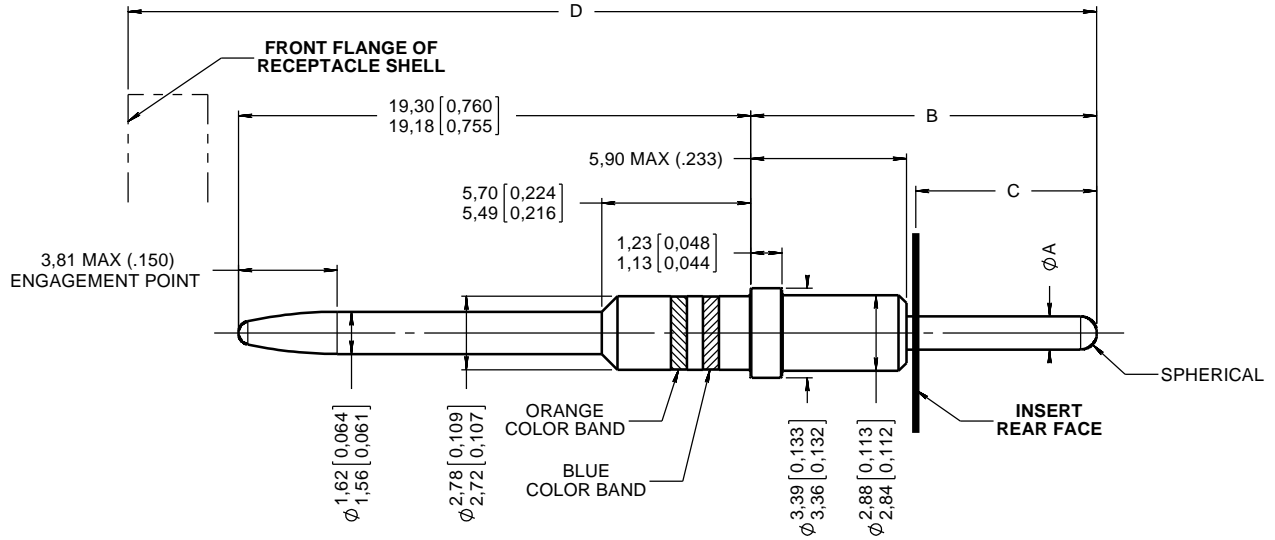


|             | CTS P/N     | Type | ØA                |                  | B                 |                  | C<br>EXTENSION / INSERT<br>REAR FACE |                  | D<br>EXTENSION / FRONT<br>FLANGE OF SHELL |                   |
|-------------|-------------|------|-------------------|------------------|-------------------|------------------|--------------------------------------|------------------|---|-------------------|
|             |             |      | BEFORE<br>TINNING | AFTER<br>TINNING | BEFORE<br>TINNING | AFTER<br>TINNING | BEFORE<br>TINNING                    | AFTER<br>TINNING | BEFORE<br>TINNING                         | AFTER<br>TINNING  |
|             |             |      | NOT TINNED        | 620 234 018      | YA                | Ø1,32 (.052)     | NA                                   | 10,55 (.416)     | NA  | 4,60 (.181)       |
| TIN LEADED  | 620 234 019 | ZA   | Ø1,22 (.048)      | 1,40 MAX (.055)  | 10,35 (.407)      | 11,05 MAX (.436) | 3,80 (.150)                          | 5,10 MAX (.200)  | 33,80 (1.330)                             | 35,70 MAX (1.405) |
| ROHS TINNED | 620 234 518 | RA   |                   |                  |                   |                  |                                      |                  |   |                   |
| NOT TINNED  | 620 234 004 | Y    | Ø1,32 (.052)      | NA               | 13,10 (.516)      | NA               | 7,20 (.283)                          | NA               | 37,80 (1.488)                             | NA                |
| TIN LEADED  | 620 234 017 | Z    | Ø1,22 (.048)      | 1,40 MAX (.055)  | 12,95 (.509)      | 13,60 MAX (.536) | 6,40 (.252)                          | 7,70 MAX (.303)  | 36,40 (1.433)                             | 38,30 MAX (1.508) |
| ROHS TINNED | 620 234 504 | R    |                   |                  |                   |                  |                                      |                  |   |                   |
| NOT TINNED  | 620 234 003 | YB   | Ø1,32 (.052)      | NA               | 16,25 (.640)      | NA               | 10,30 (.406)                         | NA               | 41,00 (1.614)                             | NA                |
| TIN LEADED  | 620 234 008 | ZB   | Ø1,22 (.048)      | 1,40 MAX (.055)  | 16,05 (.631)      | 16,75 MAX (.660) | 9,50 (.374)                          | 10,80 MAX (.425) | 39,60 (1.559)                             | 41,50 MAX (1.634) |
| ROHS TINNED | 620 234 503 | RB   |                   |                  |                   |                  |                                      |                  |   |                   |
| NOT TINNED  | 620 234 021 | YC   | Ø1,32 (.052)      | NA               | 19,55 (.770)      | NA               | 13,60 (.535)                         | NA               | 44,20 (1.740)                             | NA                |
| TIN LEADED  | 620 234 022 | ZC   | Ø1,22 (.048)      | 1,40 MAX (.055)  | 19,35 (.761)      | 20,05 MAX (.790) | 12,80 (.504)                         | 14,10 MAX (.555) | 42,80 (1.685)                             | 44,70 MAX (1.760) |
| ROHS TINNED | 620 234 521 | RC   |                   |                  |                   |                  |                                      |                  |   |                   |

**MATERIAL :**  
- LEADED NICKEL COPPER (C97)

**FINISH :**  
- BODY : PLATING .00005 INCH OF GOLD PER MIL-G-45204 TYPE I OR II, GRADE C OR D, CLASS 1 OVER NICKEL PER QQ-N-290  
PWD SOLDER CONTACT AREA WHICH IS : - TIN LEADED PER QQ-S-571  
- ROHS TINNED

**EXTRACTION TOOL :** RADIALL 282 504

**DIMENSIONS :** mm (inch are given for information only)



This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112\_9311

|                            |       |           |      |          |  |
|----------------------------|-------|-----------|------|----------|--|
| <b>CREATION</b>            |       |           |      |          |  |
| <b>PEN:</b>                |       |           |      |          |  |
| <b>NOM:</b> LEGENDRE T.    |       |           |      |          |  |
| <b>DATE:</b> Dec. 16, 2008 |       |           |      |          |  |
| <b>APPR.:</b> BROCHET L.   | /     | /         | /    | /        |  |
|                            | Issue | Revisions | Name | Approved |  |