


Series
MMC

Twinax socket contact for
twisted pair cable (AWG 24)


Issue:
Feb. 24, 2014

Page
1/1


Composition :

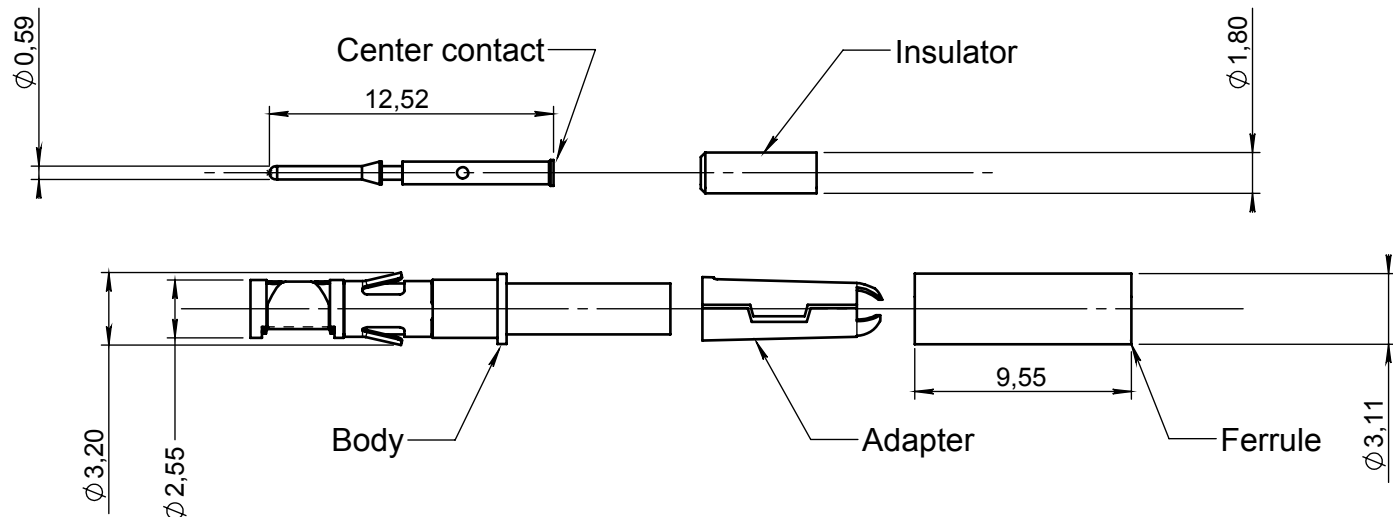

Cable stripping :

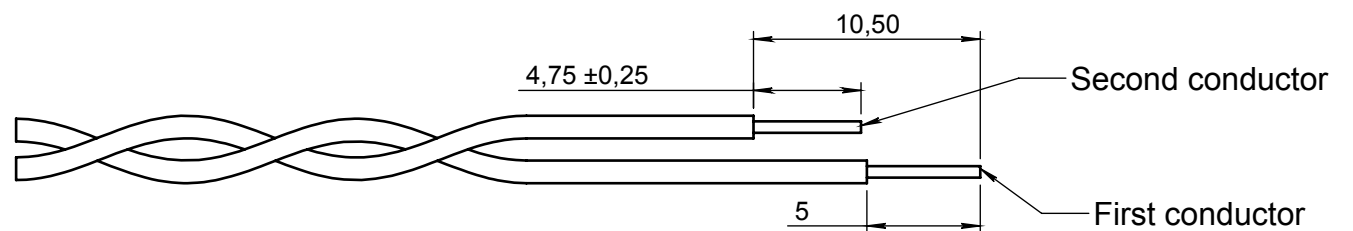


Assembly :

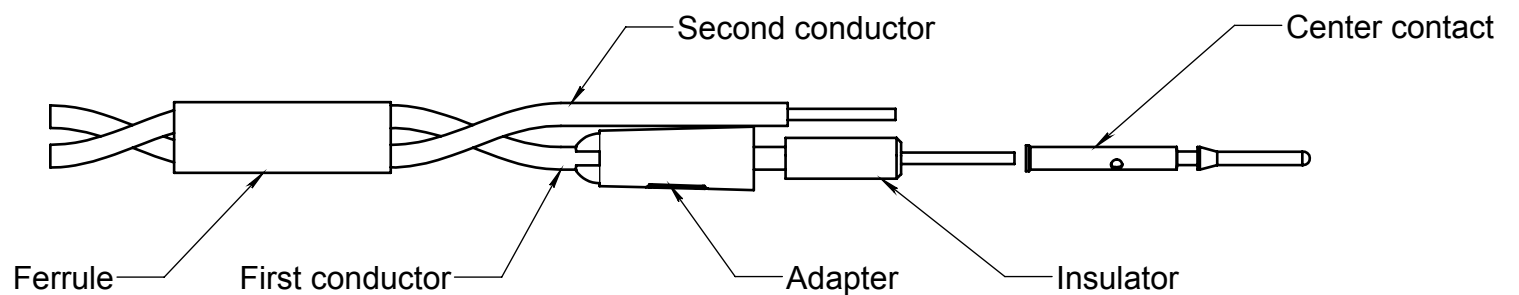

Crimp center contact on first conductor
 Crimping tool : RADIALL 282 281
 Positioner : RADIALL 282 981 - Selector position 2
 Insert the center contact in body up to ratchet mechanism
 Slide the adapter on body
 Insert the second conductor in the adapter slot
 Slide the ferrule on adapter
 Crimp the ferrule
 Crimping tool : RADIALL 282 292
 Positioner : RADIALL 282 973
 Extraction tool : RADIALL 282 920

DIMENSIONS : mm (inch are given for information only)



CREATION				
PEN:				
NOM: Arnault				
DATE: 25/07/94	Feb. 24, 2014	Document revised on new support	MARGOTTIN	
APPR.:	Jul. 25, 1994	Document creation	ARNAULT	/
	Issue	Revisions	Name	Approved