


Series
MMC

Twinax pin contact for twist
pair cable AWG 30


Issue:
Feb. 25, 2014

Page
1/1


Composition :

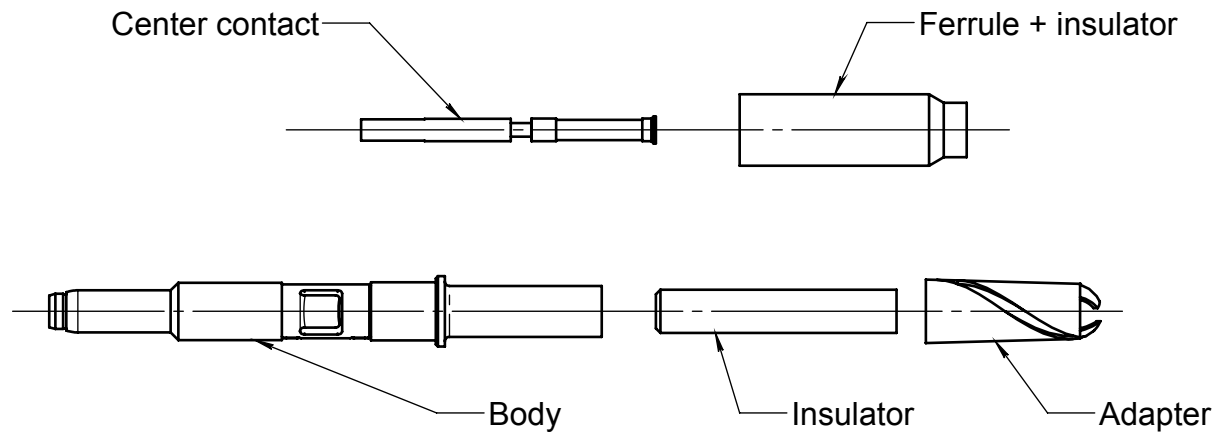

Cable stripping :

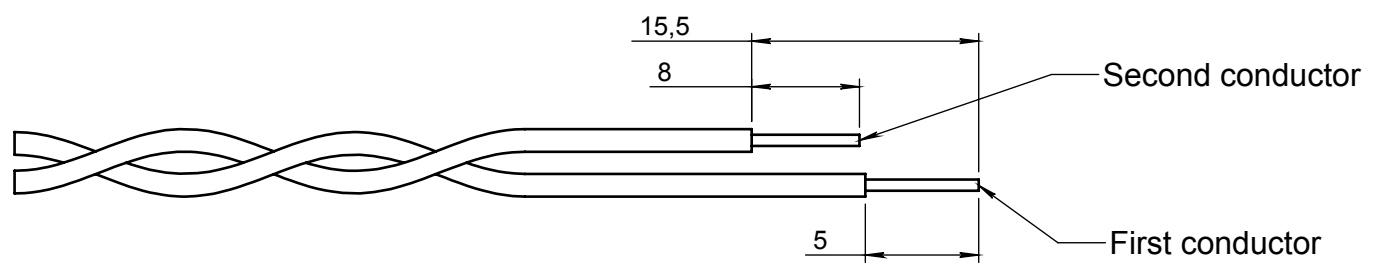

Assembly :

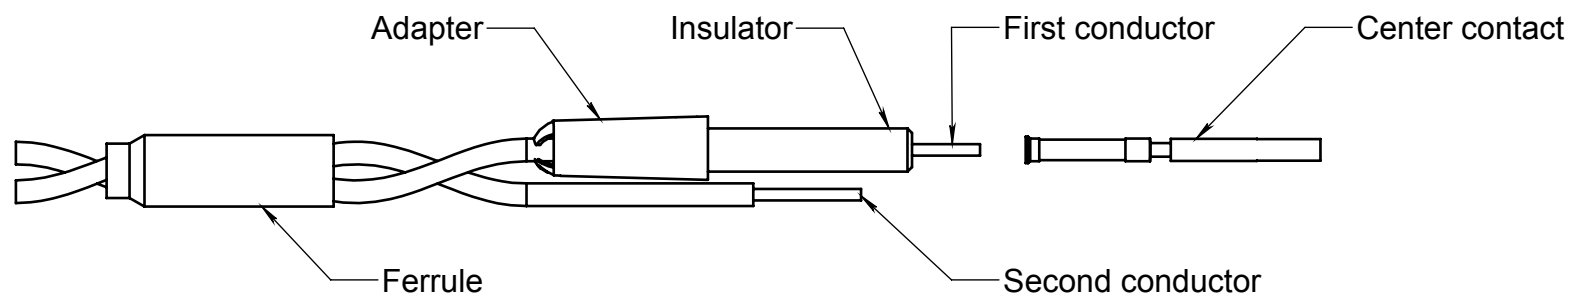


Crimp center contact on first conductor
Crimping tool : RADIALL 282 281
Positioner : RADIALL 282 981

Insert the center contact in body up to until it snaps
Slide the adapter on body
Insert the second conductor in the adapter slot
Slide the ferrule on adapter
Crimp the ferrule
Crimping tool : RADIALL 282 292
Positioner : RADIALL 282 973
Extraction tool : RADIALL 282 920

Note: Insulator and ferrule are shipped assembled

DIMENSIONS : mm (inch are given for information only)



CREATION				
PEN:				
NOM: MARGOTTIN				
DATE: 25/02/14				
APPR.:	Issue	Revisions	Name	Approved