


PAGE 1/4

ISSUE 26-06-20A

SERIES CVS

PART NUMBER CVS 06A 40-63S F4

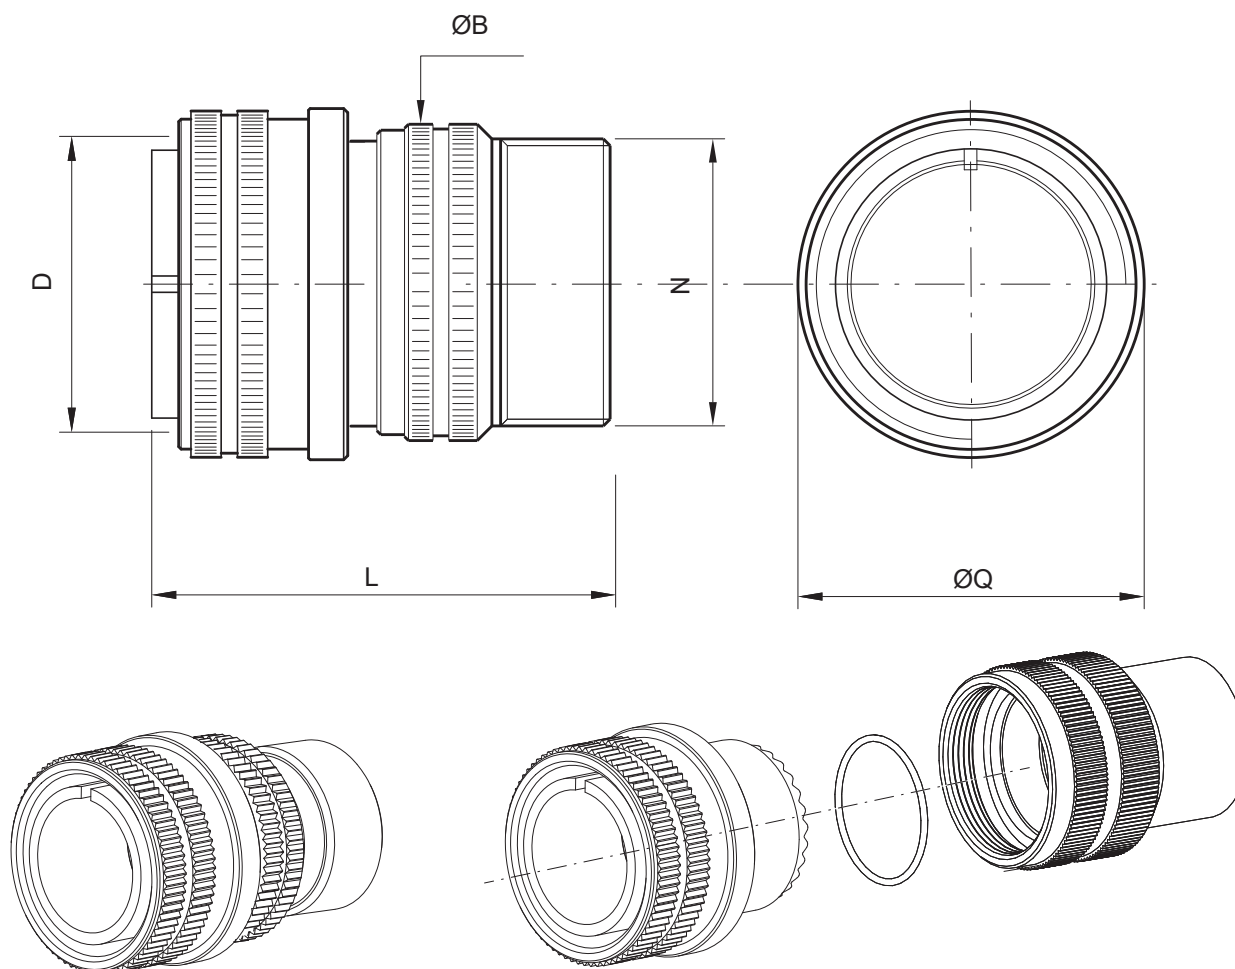

Shell size	D Connectors Thread in inches	ØQ ±0.2	ØB ±0.2	L max	N Backshell Thread in inches
10SL	5/8"-24 UNEF	22.8	20	36	5/8"-24 UNEF
14S	7/8"-20 UNEF	28.5	24	43	3/4"-20 UNEF
16S	1"-20 UNEF	31.8	27	43	7/8"-20 UNEF
16	1"-20 UNEF	31.8	27	49	7/8"-20 UNEF
18	1"1/8-18 UNEF	34	30	52	1"-20 UNEF
20	1"1/4-18 UNEF	37.3	32	52.5	1" 3/16-18 UNEF
22	1"3/8-18 UNEF	40.5	37	55	1" 3/16-18 UNEF
24	1"1/2-18 UNEF	43.5	40	55	1" 7/16-18 UNEF
28	1"3/4-18 UNS	50	45	62	1" 7/16-18 UNEF
32	2"-18 UNS	56.1	52	62	1" 3/4-18 UNS
36	2"1/4-16 UN	62.5	58	62	2"-18 UNS
40	2"1/2-16 UN	69.1	63.8	64	2"1/4-16 UN

Dimensions in mm

Dimension "L" can be different from the value indicated according to backshells accessories, wires size and some special insert configurations.


PAGE 2/4

ISSUE 26-06-20A

SERIES CVS

PART NUMBER CVS 06A 40-63S F4

Inserts

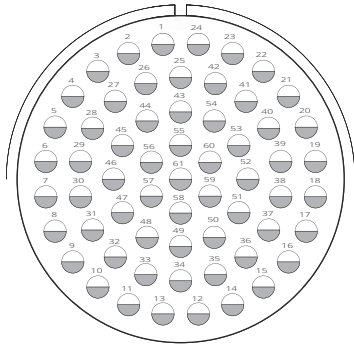

Arrangement 40-63

Gender Socket

No. of contacts 61

Contacts size N° 61 x #16 (22A Max)

Service Rating A (700Vdc - 500Vac)

Rotation N (0°)

Contacts P/N	Qty	Size	Termination	mm ² section	AWG section	Stripping length mm	Manual crimp tool	Crimp Die / Locator	Insertion tool	Removal tool	Guide pin
ST385 16S	61	16	solder	-	18÷16	7	-	-	-	-	-

PAGE 3/4

ISSUE 26-06-20A

SERIES CVS

PART NUMBER CVS 06A 40-63S F4

Code details

Insert material	-	Chloroprene rubber
Series	CVS	Thread connectors
Shell material	-	Aluminum alloy
Shell Type	06	Plug connector for straight backshell, with coupling nut
Connector Class	A	Backshell having an external thread suitable for MS3057...A or C type cable-clamps
Accessories	-	-
Accessories	-	-
Accessories	-	-
Insert	40-63	Arrangement 40-63
Gender Contacts	S	Socket
Polarization	-	N (0°)
Backshell Details	-	-
Contacts Termination	-	Solder
Contact Plating	-	Silver 3.5μ min
Shell Finish	F4	CCF green (conductive)
Panel Gasket	-	-
Contact modification code	-	-
Customization	-	-

PAGE 4/4

ISSUE 26-06-20A

SERIES CVS

PART NUMBER CVS 06A 40-63S F4

Shell type:

Thread connectors
Plug connector for straight backshell, with coupling nut

Reference Documents:

- Mil-DTL-5015 (where applicable)
- VG 95234 (where applicable)
- EN 60529

General features:

Arrangement: 40-63; Socket; the insert is supplied with rotation: N (0°)
Contact: n.61 size 16; Solder

Operating temperatures: -55°C ÷ +125°C
Protection degree (mated connectors; according to EN 60529): IP54
Insulating rubber parts: Chloroprene rubber

Connector supplied with:

- Backshell having an external thread suitable for MS3057...A or C type cable-clamps

Electrical specifications:

Nominal Voltage: 700 Vdc / 500 Vac (service A)
Test Voltage: 2000 Vac

Current Rating, single contact:
- maximum current: 22A (#16) with ambient temperature 20°C
- rated current: 13A (#16) with ambient temperature 80°C

COMPONENTS	MATERIALS	PLATING / FINISHES	ACCESSORIES (included)		
Shells	Aluminum alloy	CCF green (conductive)	-	-	-
Insulating	Chloroprene rubber	-	-	-	-
Contacts	Copper alloy	Silver 3.5µ min	-	-	-
Panel Gasket	-	-	-	-	-
Others part	-	-	-	-	-

PACKAGING

Quantity	Type	Weight
1	Plastic Bags	-
-	Carton Box	-



Radiall VanSystem S.r.l. | www.vansystem.eu - www.radiall.com