
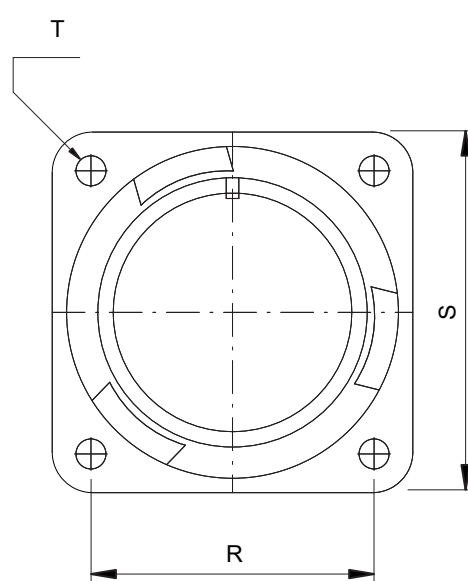
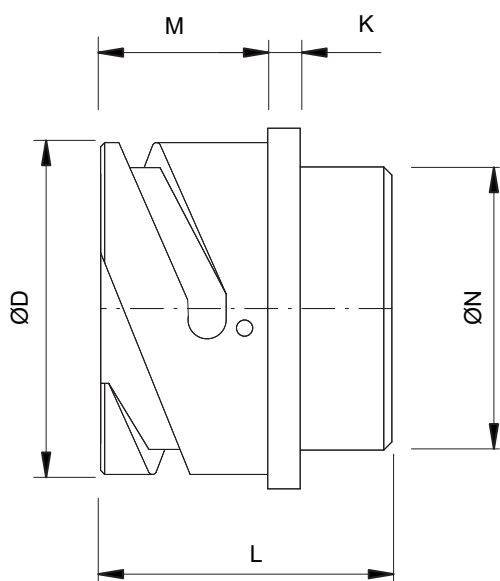
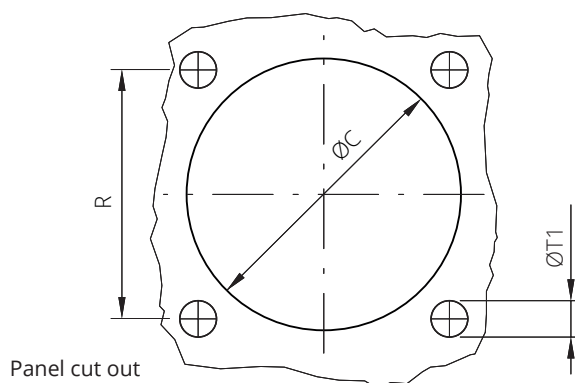


PAGE 1/4

ISSUE 21-10-19A

SERIES CVB

PART NUMBER CVB 02A 22-22P CR F4

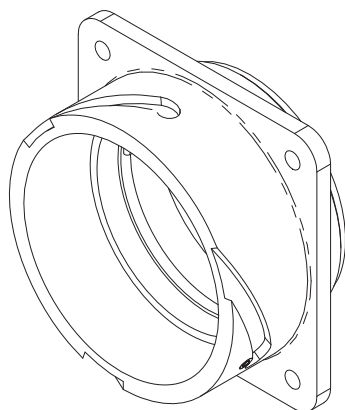

Shell size	ØD	L ±0.3	K ±0.2	M ±0.2	ØN Max	S ±0.3	R ±0.1	ØT ±0.2	ØT1 Through holes	ØC ±0.2
10SL	18.2	25	2.8	14.2	16.3	25.4	18.2	3.1	3.4	17
14S	24.6	25	3.2	14.5	19.2	30.2	23	3.1	3.4	20
16S	27.4	24.7	3.2	14.2	22.4	32.5	24.6	3.1	3.4	23
16	27.4	34	3.2	19	22.4	32.5	24.6	3.1	3.4	23
18	30.8	34.3	4	19	25.6	34.9	27	3.1	3.4	26.5
20	34.2	34.3	4	19	28.8	38.1	29.4	3.1	3.4	30
22	37.4	34.3	4	19.7	32.2	41	31.8	3.1	3.4	33
24	40.9	36	4	20.6	35.2	44.5	34.9	3.7	3.9	36
28	46.7	36	4	20.6	41.5	50.8	39.7	3.7	3.9	42
32	53.4	37.5	4	22.2	47.8	57	44.5	4.4	4.5	48.5
36	59.6	37.5	4	22.2	52.6	63.5	49.2	4.4	4.5	55
40	65.5	37.5	4	22.2	59.2	69.8	55.6	4.4	4.5	61

Dimensions in mm

Dimension "L" can be different from the value indicated according to backshells accessories, wires size and some special insert configurations.


PAGE 2/4

ISSUE 21-10-19A

SERIES CVB

PART NUMBER CVB 02A 22-22P CR F4

Inserts



Arrangement	22-22
Gender	Pin
No. of contacts	4
Contacts size	N° 4 x #8 (73A Max)
Service Rating	A (700Vdc - 500Vac)
Rotation	N (0°)

Contacts P/N	Qty Size		Termination	mm ² section	AWG section	Stripping length mm	Manual crimp tool	Crimp Die / Locator	Insertion tool	Removal tool	Guide pin
ST485 8P	4	8	crimp	9	8	12.2	HT-45	ME2	CTIN-784-8	CTES-784-8	-

PAGE 3/4

ISSUE 21-10-19A

SERIES CVB

PART NUMBER CVB 02A 22-22P CR F4

Code details

Insert material	_	Chloroprene rubber
Series	CVB	Bayonet connector
Shell material	_	Aluminum alloy
Shell Type	02A	Front mounting receptacle connector non enviromental (equivalent MS3102A threaded version or MS3102A..B bayonet version)
Connector Class	_	No rear accessories
Accessories	-	-
Accessories	-	-
Accessories	-	-
Insert	22-22	Arrangement 22-22
Gender Contacts	P	Pin
Polarization	-	N (0°)
Backshell Details	-	-
Contacts Termination	CR	Crimp
Contact Plating	-	Silver 3.5μ min
Shell Finish	F4	CCF green (conductive)
Panel Gasket	-	-
Contact modification code	-	-
Customization	-	-

PAGE 4/4

ISSUE 21-10-19A

SERIES CVB

PART NUMBER CVB 02A 22-22P CR F4

Shell type:

Bayonet connector

Front mounting receptacle connector non enviromental (equivalent MS3102A threaded version or MS3102A..B bayonet version)

Reference Documents:

- Mil-DTL-5015 (where applicable)

- VG 95234 (where applicable)

- EN 60529

General features:

Arrangement: 22-22; Pin; the insert is supplied with rotation: N (0°)

Contact: n.4 size 8; Crimp

Operating temperatures: -55°C ÷ +125°C

Insulating rubber parts: Chloroprene rubber

Connector supplied with:

- No rear accessories

Electrical specifications:

Nominal Voltage: 700 Vdc / 500 Vac (service A)

Test Voltage: 2000 Vac

Current Rating, single contact:

- maximum current: 73A (#8) with ambient temperature 20°C

- rated current: 46A (#8) with ambient temperature 80°C

COMPONENTS	MATERIALS	PLATING / FINISHES	ACCESSORIES (included)		
			P/N	Description	Quantity
Shells	Aluminum alloy	CCF green (conductive)			
Insulating	Chloroprene rubber	-	-	-	-
Contacts	Copper alloy	Silver 3.5µ min	-	-	-
Panel Gasket	-	-	-	-	-
Others part	-	-	-	-	-

PACKAGING

Quantity Type Weight

1 Plastic Bags -

- Carton Box -


Radiall VanSystem S.r.l. | www.vansystem.eu - www.radiall.com