


PAGE 1/4

ISSUE 30-06-22A

SERIES CVB

PART NUMBER CVB 00DA 32-5S LC F7

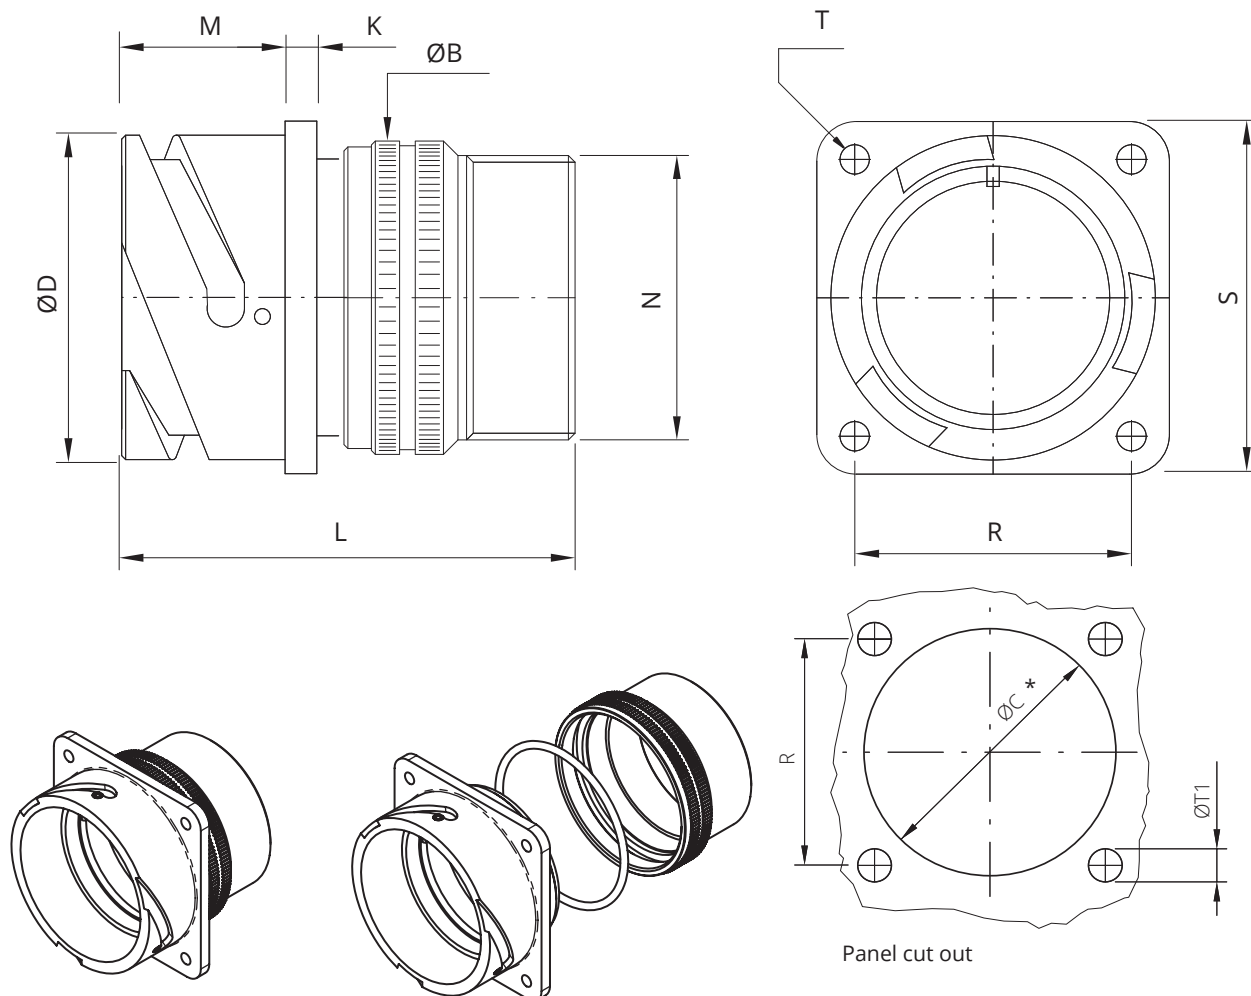

Panel cut out

* For installation with backshell mounted
consult our sales office

Shell size	ØD +0 -0.15	ØB ±0.2	L	M ±0.2	K ±0.2	N Backshell Thread in inches	R ±0.1	S ±0.3	ØT ±0.2	ØT1 Through holes	ØC* ±0.2
10SL	18.2	20	41	14.2	2.8	5/8"-24 UNEF	18.2	25.4	3.1	3.4	17
14S	24.6	24	42.5	14.5	3.2	3/4"-20 UNEF	23	30.2	3.1	3.4	20
16S	27.4	27	42.5	14.2	3.2	7/8"-20 UNEF	24.6	32.5	3.1	3.4	23
16	27.4	27	50	19	3.2	7/8"-20 UNEF	24.6	32.5	3.1	3.4	23
18	30.8	30	52	19	4	1"-20 UNEF	27	34.9	3.1	3.4	26.5
20	34.2	32	51	19	4	1" 3/16-18 UNEF	29.4	38.1	3.1	3.4	30
22	37.4	37	54	19.7	4	1" 3/16-18 UNEF	31.8	41	3.1	3.4	33
24	40.9	40	54	20.6	4	1" 7/16-18 UNEF	34.9	44.5	3.7	3.9	36
28	46.7	45	62	20.6	4	1" 7/16-18 UNEF	39.7	50.8	3.7	3.9	42
32	53.4	52	63	22.2	4	1" 3/4-18 UNS	44.5	57	4.4	4.5	48.5
36	59.6	58	63	22.2	4	2"-18 UNS	49.2	63.5	4.4	4.5	55
40	65.5	63.2	63	22.2	4	2" 1/4-16 UN	55.6	69.8	4.4	4.5	61

Dimensions in mm

Dimension "L" can be different from the value indicated according to backshells accessories, wires size and some special insert configurations.


PAGE 2/4

ISSUE 30-06-22A

SERIES CVB

PART NUMBER CVB 00DA 32-5S LC F7

Inserts

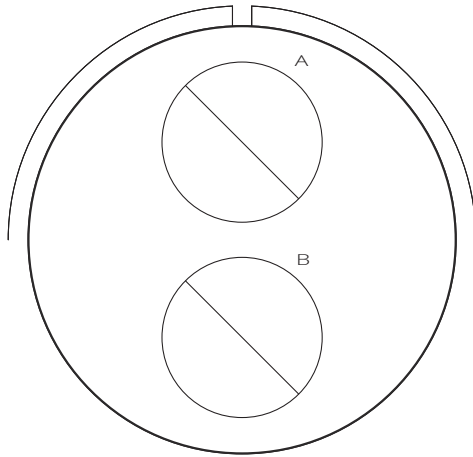

Arrangement	32-5
Gender	Socket
No. of contacts	2
Contacts size	N° 2 x #0 (245A Max)
Service Rating	D (1250Vdc - 900Vac)
Rotation	N (0°)

Contacts P/N	Qty	Size	Termination	mm ² section	AWG section	Stripping length mm	Manual crimp tool	Crimp Die / Locator	Insertion tool	Removal tool	Guide pin
-	-	-	-	-	-	-	-	-	-	-	-

PAGE 3/4

ISSUE 30-06-22A

SERIES CVB

PART NUMBER CVB 00DA 32-5S LC F7

Code details

Insert material	–	Chloroprene rubber
Series	CVB	Bayonet connector
Shell material	–	Aluminum alloy
Shell Type	00	Front mounting receptacle connector able to accept rear accessories (ordered with accessories)
Connector Class	DA	Standard backshell having an external thread suitable for MS3057...A or C type cable-clamps, with waterproof O-ring
Accessories	–	-
Accessories	–	-
Accessories	–	-
Insert	32-5	Arrangement 32-5
Gender Contacts	S	Socket
Polarization	–	N (0°)
Backshell Details	–	-
Contacts Termination	LC	Less contacts (to be purchased separately)
Contact Plating	–	-
Shell Finish	F7	Black epoxy-polyurethane varnish (non conductive), RoHS compliant
Panel Gasket	–	-
Contact modification code	–	-
Customization	–	-

** The creepage distance is reduced for the insert with contacts for larger wires than the standard ones.
The contacts with reduced ØD for smaller wire may be a sealing problem with grommets.
The contacts with enlarged ØD for larger wires may be difficulties with grommets.
Please contact our sales office.*

PAGE 4/4

ISSUE 30-06-22A

SERIES CVB

PART NUMBER CVB 00DA 32-5S LC F7

Shell type:

Bayonet connector

Front mounting receptacle connector able to accept rear accessories (ordered with accessories)

Reference Documents:

- Mil-DTL-5015 (where applicable)
- VG 95234 (where applicable)
- EN 60529
- European Directive 2011/65/UE (RoHS)

General features:

Arrangement: 32-5; Socket; the insert is supplied with rotation: N (0°)

Contact: n.2 size 0; Less contacts (to be purchased separately)

Operating Temperature: -55 ÷ +125°C

IP Protection degree according EN60529: IP67

Insulating rubber parts: Chloroprene rubber

Connector supplied with:

- Standard backshell having an external thread suitable for MS3057...A or C type cable-clamps, with waterproof O-ring

Electrical specifications:

Nominal Voltage: 1250 Vdc / 900 Vac (service D)

Test Voltage: 2800 Vac

Current Rating, single contact:

- maximum current: 245A (#0) with ambient temperature 20°C
- rated current: 150A (#0) with ambient temperature 80°C

** The creepage distance is reduced for the insert with contacts for larger wires than the standard ones.*

The contacts with reduced ØD for smaller wire may be a sealing problem with grommets.

The contacts with enlarged ØD for larger wires may be difficulties with grommets.

Please contact our sales office.

COMPONENTS	MATERIALS	PLATING / FINISHES	ACCESSORIES (included)		
			P/N	Description	Quantity
Shells	Aluminum alloy	Black epoxy-polyurethane varnish (non conductive), RoHS compliant	-	-	-
Insulating	Chloroprene rubber	-	-	-	-
Contacts	-	-	-	-	-
Panel Gasket	-	-	-	-	-
Others part	-	-	-	-	-

PACKAGING

Quantity	Type	Weight
1	Plastic Bags	-
-	Carton Box	-