


PAGE 1/4

ISSUE 25-08-21A

SERIES CVB

PART NUMBER CVB 06F 28-15S CR F16

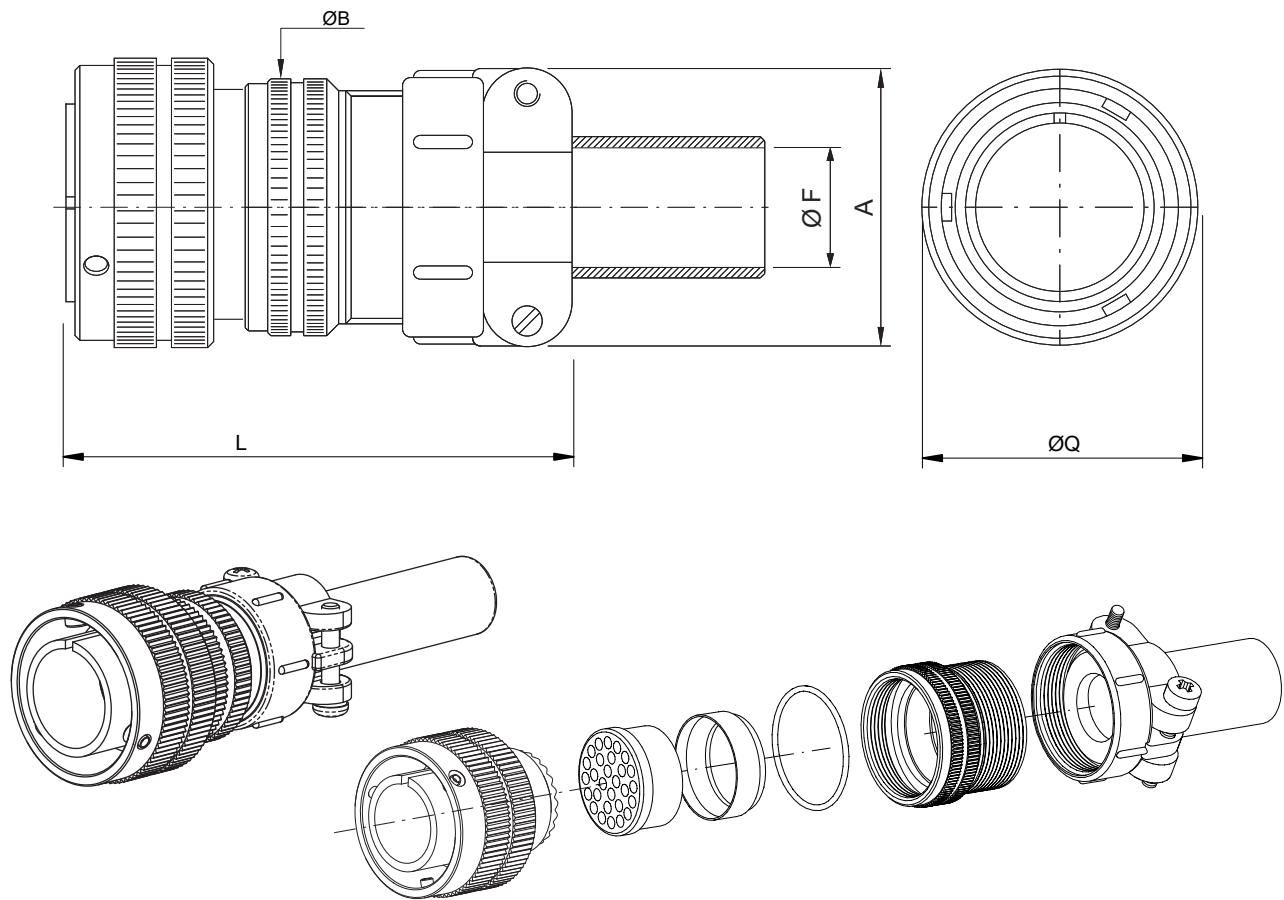

Shell size	ØQ ±0.2	L max	ØB ±0.2	A max	ØF cable max dimension
10SL	23.3	46	20	22.5	5.6
14S	29.5	55	24	28	7.9
16S	33	56.5	27	30	11
16	33	62.5	27	30	11
18	37	67.5	30	31.7	14.2
20	41	68	32	37.5	15.8
22	43	70.5	37	37.5	15.8
24	48	70.5	40	43.5	19
28	53	77.5	45	43.5	19
32	60	77.5	52	51.7	23.8
36	66.2	77.5	58	58.5	31.7
40	72.4	93	63.8	68.5	34.9

Dimensions in mm

Dimension "L" can be different from the value indicated according to backshells accessories, wires size and some special insert configurations.


PAGE 2/4

ISSUE 25-08-21A

SERIES CVB

PART NUMBER CVB 06F 28-15S CR F16

Inserts

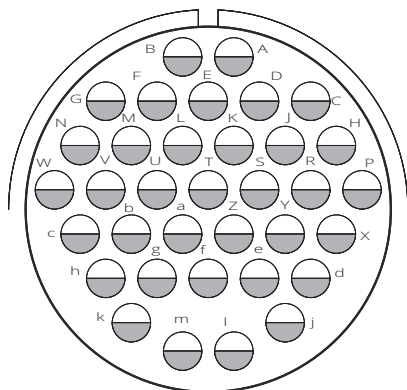


Arrangement	28-15
Gender	Socket
No. of contacts	35
Contacts size	N° 35 x #16 (22A Max)
Service Rating	A (700Vdc - 500Vac)
Rotation	N (0°)

Contacts P/N	Qty	Size	Termination	mm ² section	AWG section	Stripping length mm	Manual crimp tool	Crimp Die / Locator	Insertion tool	Removal tool	Guide pin
ST485 16S	35	16	crimp	1÷1.5	18÷16	6.3	CRT-784/1	LOC-784	CTIN-784-16	CTES-784-16	GP-784-16

--	--	--	--	--	--	--	--	--	--	--	--

Grommet *

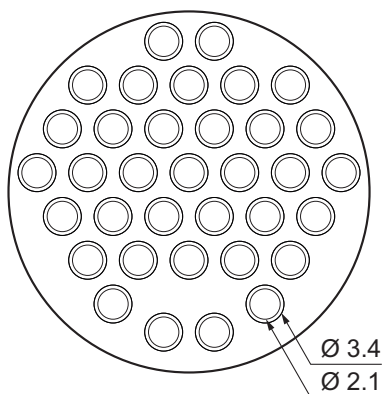

** Consult our sales office for wire specification*

PAGE 3/4

ISSUE 25-08-21A

SERIES CVB

PART NUMBER CVB 06F 28-15S CR F16

Code details

Insert material	–	Chloroprene rubber
Series	CVB	Bayonet connector
Shell material	–	Aluminum alloy
Shell Type	06	Plug connector for straight backshell, with coupling nut
Connector Class	F	Backshell provided with MS3057..A type cable-clamp, bushing MS 3420.., grommet and cone (single wire)
Accessories	–	-
Accessories	–	-
Accessories	–	-
Insert	28-15	Arrangement 28-15
Gender Contacts	S	Socket
Polarization	–	N (0°)
Backshell Details	–	-
Contacts Termination	CR	Crimp
Contact Plating	–	Silver 3.5μ min
Shell Finish	F16	CCF black, conductive - RoHS compliant
Panel Gasket	–	-
Contact modification code	–	-
Customization	–	-

PAGE 4/4

ISSUE 25-08-21A

SERIES CVB

PART NUMBER CVB 06F 28-15S CR F16

Shell type:

Bayonet connector

Plug connector for straight backshell, with coupling nut

Reference Documents:

- Mil-DTL-5015 (where applicable)
- VG 95234 (where applicable)
- EN 60529
- European Directive 2011/65/UE (RoHS)

General features:

Arrangement: 28-15; Socket; the insert is supplied with rotation: N (0°)

Contact: n.35 size 16; Crimp

Operating Temperature: -55 ÷ +125°C

Insulating rubber parts: Chloroprene rubber

Connector supplied with:

- Backshell provided with MS3057..A type cable-clamp, bushing MS 3420.., grommet and cone (single wire)

Electrical specifications:

Nominal Voltage: 700 Vdc / 500 Vac (service A)

Test Voltage: 2000 Vac

Current Rating, single contact:

- maximum current: 22A (#16) with ambient temperature 20°C
- rated current: 13A (#16) with ambient temperature 80°C

COMPONENTS	MATERIALS	PLATING / FINISHES	ACCESSORIES (included)		
			P/N	Description	Quantity
Shells	Aluminum alloy	CCF black, conductive - RoHS compliant			
Insulating	Chloroprene rubber	-	-	-	-
Contacts	Copper alloy	Silver 3.5µ min	-	-	-
Panel Gasket	-	-	-	-	-
Others part	-	-	-	-	-

PACKAGING

Quantity	Type	Weight
1	Plastic Bags	-
-	Carton Box	-