
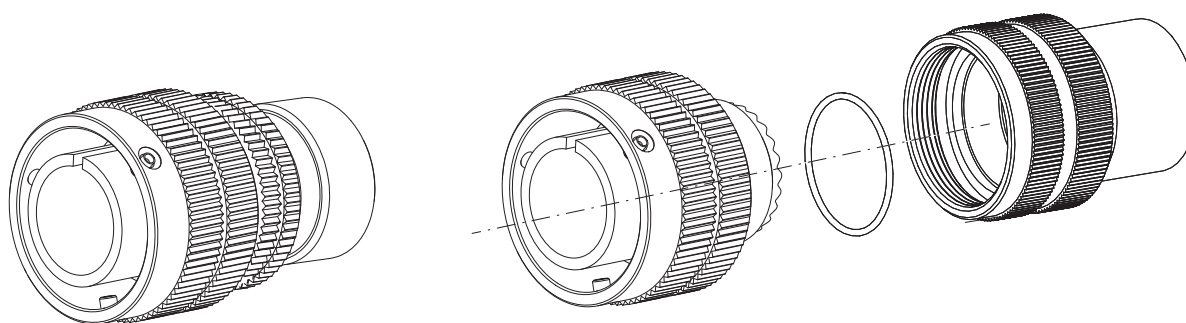


PAGE 1/4

ISSUE 25-08-21A

SERIES CVB

PART NUMBER CVB 06DA 18-1P M25 CR F16

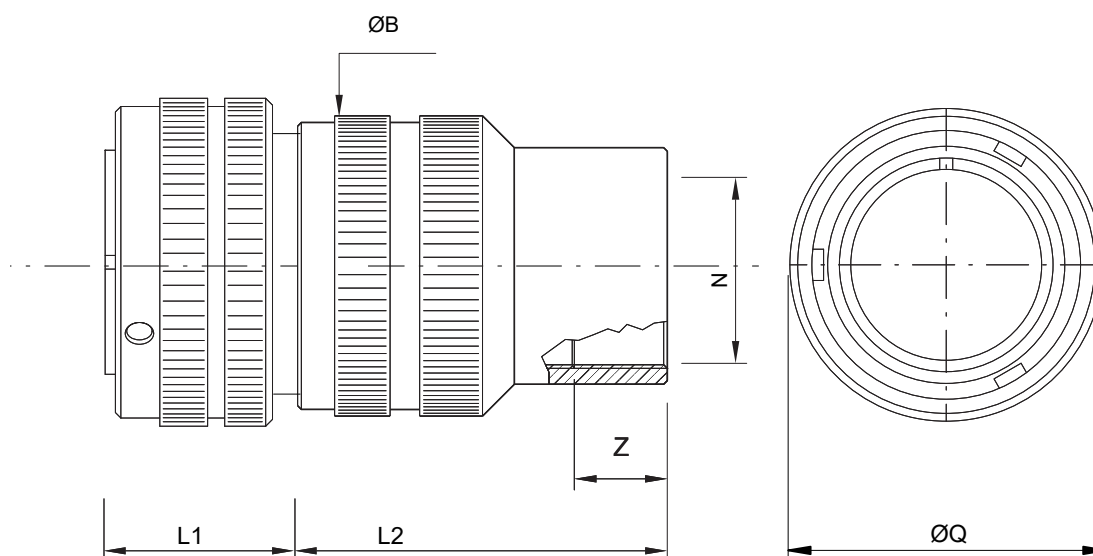

Shell size	$\varnothing Q$ ± 0.2	$\varnothing B$ ± 0.2	Z min	L1	N Backshell Metric thread	L2 M
18	37	30	9	24,9	M25	50

Dimensions in mm

Dimensions "L1 and L2" can be different from the value indicated according to backshells accessories, wires size and some special insert configurations.


PAGE 2/4

ISSUE 25-08-21A

SERIES CVB

PART NUMBER CVB 06DA 18-1P M25 CR F16

Inserts



Arrangement	18-1
Gender	Pin
No. of contacts	10
Contacts size	N° 10 x #16 (22A Max)
Service Rating	B,C,F,G=A - Bal.=I
	B,C,F,G=700 Vdc - Bal.=250Vdc
	B,C,F,G=500 Vac - Bal.=200Vac
Rotation	N (0°)

Contacts P/N	Qty	Size	Termination	mm ² section	AWG section	Stripping length mm	Manual crimp tool	Crimp Die / Locator	Insertion tool	Removal tool	Guide pin
ST485 16P	10	16	crimp	1÷1.5	18÷16	6.3	CRT-784/1	LOC-784	CTIN-784-16	CTES-784-16	GP-784-16

PAGE 3/4

ISSUE 25-08-21A

SERIES CVB

PART NUMBER CVB 06DA 18-1P M25 CR F16

Code details

Insert material	–	Chloroprene rubber
Series	CVB	Bayonet connector
Shell material	–	Aluminum alloy
Shell Type	06	Plug connector for straight backshell, with coupling nut
Connector Class	DA	Backshell with waterproof o-ring. Internal Metric thread M25
Accessories	–	-
Accessories	–	-
Accessories	–	-
Insert	18-1	Arrangement 18-1
Gender Contacts	P	Pin
Polarization	–	N (0°)
Backshell Details	M25	Internal Metric thread M25
Contacts Termination	CR	Crimp
Contact Plating	–	Silver 3.5μ min
Shell Finish	F16	CCF black, conductive - RoHS compliant
Panel Gasket	–	-
Contact modification code	–	-
Customization	–	-

PAGE 4/4

ISSUE 25-08-21A

SERIES CVB

PART NUMBER CVB 06DA 18-1P M25 CR F16

Shell type:

Bayonet connector

Plug connector for straight backshell, with coupling nut

Reference Documents:

- Mil-DTL-5015 (where applicable)
- VG 95234 (where applicable)
- EN 60529
- European Directive 2011/65/UE (RoHS)

General features:

Arrangement: 18-1; Pin; the insert is supplied with rotation: N (0°)

Contact: n.10 size 16; Crimp

Operating Temperature: -55 ÷ +125°C

IP Protection degree according EN60529 (mated connectors with adequate accessories): IP67

Insulating rubber parts: Chloroprene rubber

Connector supplied with:

- Backshell with waterproof o-ring. Internal Metric thread M25

Electrical specifications:

Nominal Voltage: B,C,F,G=700 Vdc - Bal.=250 Vdc / B,C,F,G=500 Vac - Bal.=200 Vac (service B,C,F,G=A - Bal.=I)

Test Voltage: B,C,F,G=2000 Vac - Bal.=1000 Vac

Current Rating, single contact:

- maximum current: 22A (#16) with ambient temperature 20°C
- rated current: 13A (#16) with ambient temperature 80°C

COMPONENTS	MATERIALS	PLATING / FINISHES	ACCESSORIES (included)		
Shells	Aluminum alloy	CCF black, conductive - RoHS compliant	P/N	Description	Quantity
Insulating	Chloroprene rubber	-	-	-	-
Contacts	Copper alloy	Silver 3.5µ min	-	-	-
Panel Gasket	-	-	-	-	-
Others part	-	-	-	-	-

PACKAGING

Quantity	Type	Weight
1	Plastic Bags	-
-	Carton Box	-