
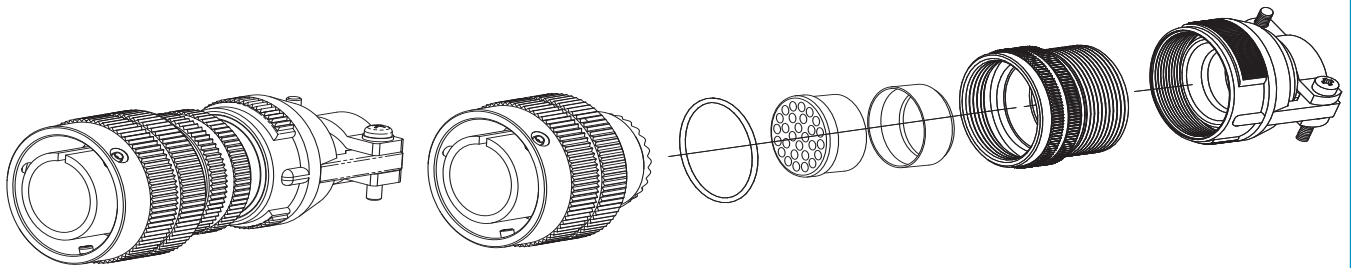


PAGE 1/4

ISSUE 18-10-21A

SERIES RF CVBS

PART NUMBER RF CVBS 06ACF 24-28PX CR CD5 F16

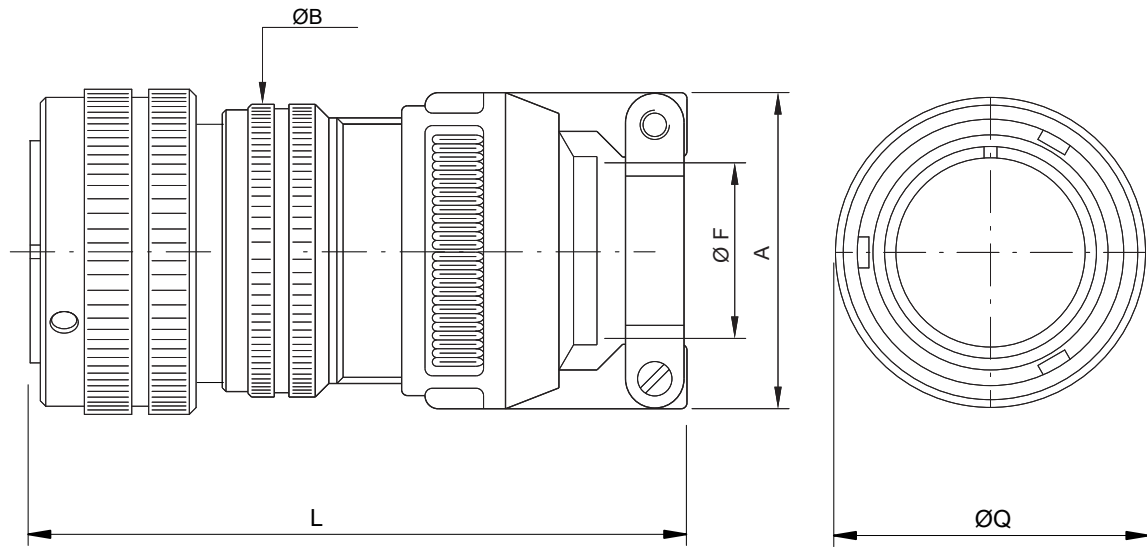

Shell size	ØQ ±0.2	L max	ØB ±0.2	A max	ØF cable dimension	
					Min	Max
10SL	23.3	60	20	23	2.4	7.9
14S	29.5	67	24	26	5.8	11.2
16S	33	68	27	28.5	8	13.5
16	33	74	27	28.5	8	13.5
18	37	79.5	30	32	9.6	15.9
20	41	79.5	32	37.5	11.3	19
22	43	81.5	37	37.5	11.3	19
24	48	88.5	40	43.5	15.5	23.8
28	53	95.5	45	43.5	15.5	23.8
32	60	100	52	54	23.4	31.8
36	66.2	104.5	58	58	25.4	35
40	72.4	108	63.8	63.5	30	41.3

Dimensions in mm

Dimension "L" can be different from the value indicated according to backshells accessories, wires size and some special insert configurations.


PAGE 2/4

ISSUE 18-10-21A

SERIES RF CVBS

PART NUMBER RF CVBS 06ACF 24-28PX CR CD5 F16

Inserts

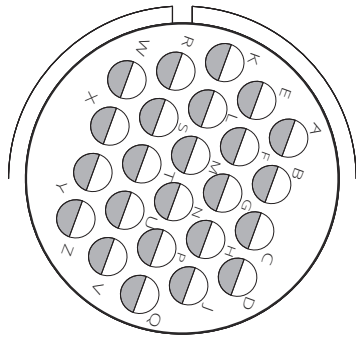

Arrangement	24-28
Gender	Pin
No. of contacts	24
Contacts size	N° 24 x #16 (22A Max)
Service Rating	I (250Vdc - 200Vac)
Rotation	X (110°)

Contacts P/N	Qty	Size	Termination	mm ² section	AWG section	Stripping length mm	Manual crimp tool	Crimp Die / Locator	Insertion tool	Removal tool	Guide pin
ST485 16P CD5	24	16	crimp	1÷1.5	18÷16	6.3	CRT-784/1	LOC-784	CTIN-784-16	CTES-784-16	GP-784-16

--	--	--	--	--	--	--	--	--	--	--	--

Grommet *

Wire Outside Diameter (mm)

Size	min	max
#16	2.2	3.6

* Consult our sales office for wire specification

PAGE 3/4

ISSUE 18-10-21A

SERIES RF CVBS

PART NUMBER RF CVBS 06ACF 24-28PX CR CD5 F16

Code details

Insert material	RF	Fire behaviour (fire and smoke) complying with EN 45545-2, NFPA130 (ASTME162, ASTME662, BSS7239)
Series	CVBS	Bayonet connector with protected mating ramps
Shell material	–	Aluminum alloy
Shell Type	06	Plug connector for straight backshell, with coupling nut
Connector Class	ACF	Standard backshell, waterproof O-ring , MS 3057...C type cable-clamp, grommet and cone (for Jacketed cable)
Accessories	–	-
Accessories	–	-
Accessories	–	-
Insert	24-28	Arrangement 24-28
Gender Contacts	P	Pin
Polarization	X	X (110°)
Backshell Details	–	-
Contacts Termination	CR	Crimp
Contact Plating	CD5	Nickel + gold 0.4 µ min
Shell Finish	F16	CCF black, conductive - RoHS compliant
Panel Gasket	–	-
Contact modification code	–	-
Customization	–	-

PAGE 4/4

ISSUE 18-10-21A

SERIES RF CVBS

PART NUMBER RF CVBS 06ACF 24-28PX CR CD5 F16

Shell type:

Bayonet connector with protected mating ramps
Plug connector for straight backshell, with coupling nut

Reference Documents:

- Mil-DTL-5015 (where applicable)
- VG 95234 (where applicable)
- EN 60529
- EN45545-2, NFPA130 (ASTME162, ASTM662, BSS7239)
- European Directive 2011/65/UE (RoHS)

General features:

Arrangement: 24-28; Pin; the insert is supplied with rotation: X (110°)
Contact: n.24 size 16; Crimp

Operating Temperature: -55 ÷ +150°C

Insulating rubber parts: Fire behaviour (fire and smoke) complying with EN 45545-2, NFPA130 (ASTME162, ASTM662, BSS7239)

Connector supplied with:

- Standard backshell, waterproof O-ring , MS 3057...C type cable-clamp, grommet and cone (for Jacketed cable)

Electrical specifications:

Nominal Voltage: 250 Vdc / 200 Vac (service I)

Test Voltage: 1000 Vac

Current Rating, single contact:

- maximum current: 22A (#16) with ambient temperature 20°C
- rated current: 13A (#16) with ambient temperature 80°C

COMPONENTS	MATERIALS	PLATING / FINISHES	ACCESSORIES (included)		
Shells	Aluminum alloy	CCF black, conductive - RoHS compliant	P/N	Description	Quantity
Insulating	Fire behaviour * (fire and smoke)	-	-	-	-
Contacts	Copper alloy	Nickel + gold 0.4 µ min	-	-	-
Panel Gasket	-	-	-	-	-
Others part	-	-	-	-	-

* Insulating Class parts: fire behaviour (fire and smoke) complying with EN 45545-2
Par. 4.3.1 (< 10 g), NFPA130 Par. 8.4.1.10 (< 100 cm²)

PACKAGING

Quantity	Type	Weight
1	Plastic Bags	-
-	Carton Box	-