


PAGE 1/4

ISSUE 17-10-22A

SERIES CVBS

PART NUMBER CVBS 030RA 22-19P F7

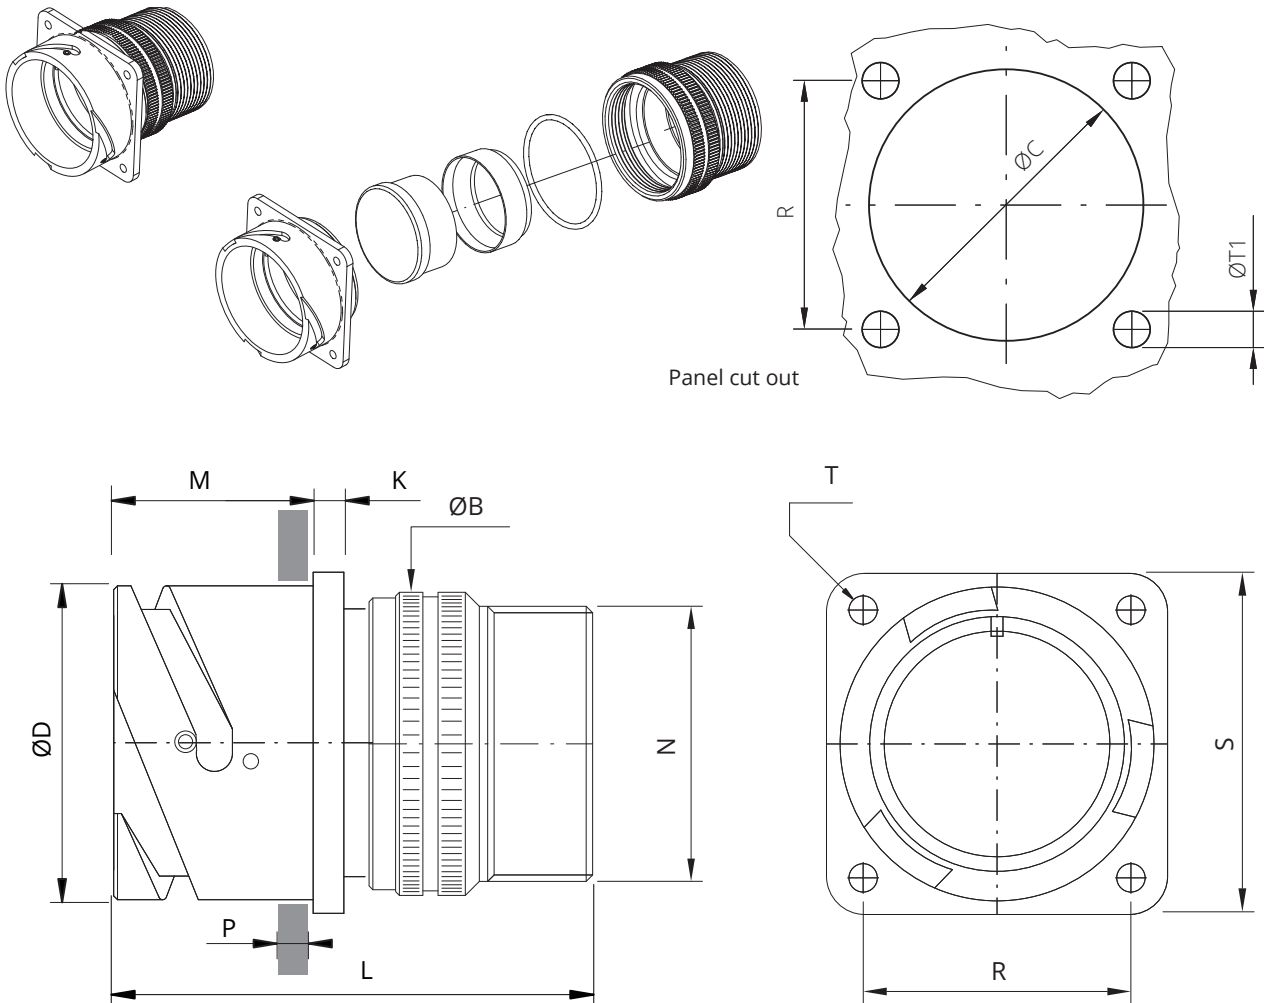

Shell size	ØD +0 -0.15	ØB ±0.2	L	M ±0.2	K ±0.2	N Backshell Thread in inches	R ±0.1	S ±0.3	ØT	ØT1	ØC ±0.2	P Panel Thickness Max
10SL	18.2	20	46	18.2	2.8	5/8"-24 UNEF	18.2	25.4	M4	4.5	19.1	6
14S	24.6	24	47.5	18.6	3.2	3/4"-20 UNEF	23	30.2	M4	4.5	25.5	7.2
16S	27.4	27	47.5	18.6	3.2	7/8"-20 UNEF	24.6	32.5	M4	4.5	28.3	7.2
16	27.4	27	54.5	23.05	3.2	7/8"-20 UNEF	24.6	32.5	M4	4.5	28.3	5.35
18	30.8	30	55.5	23.4	4	1"-20 UNEF	27	34.9	M4	4.5	31.7	7.25
20	34.2	32	55.5	23.4	4	1" 3/16-18 UNEF	29.4	38.1	M4	4.5	35	7.3
22	37.4	37	58	23.4	4	1" 3/16-18 UNEF	31.8	41	M4	4.5	38.3	7.3
24	40.9	40	58	23.4	4	1" 7/16-18 UNEF	34.9	44.5	M4	4.5	41.8	6.85
28	46.7	45	65	24.4	4	1" 7/16-18 UNEF	39.7	50.8	M5	5.5	47.6	7.8
32	53.4	52	65	24.4	4	1" 3/4-18 UNS	44.5	57	M5	5.5	54.3	7.5
36	59.6	58	65	24.4	4	2"-18 UNS	49.2	63.5	M5	5.5	60.5	7.5
40	65.5	63.2	65	24.4	4	2"1/4-16 UN	55.6	69.8	M5	5.5	66.4	7.5

Dimensions in mm

Dimension "L" can be different from the value indicated according to backshells accessories, wires size and some special insert configurations.


PAGE 2/4

ISSUE 17-10-22A

SERIES CVBS

PART NUMBER CVBS 030RA 22-19P F7

Inserts

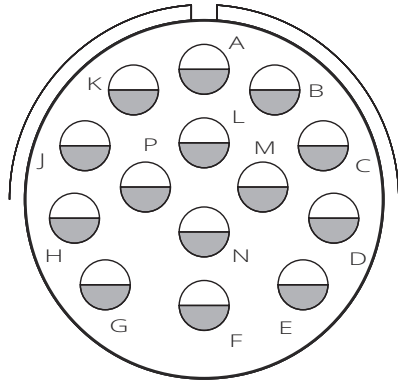

Arrangement 22-19

Gender Pin

No. of contacts 14

Contacts size N° 14 x #16 (22A Max)

Service Rating A (700Vdc - 500Vac)

Rotation N (0°)

Contacts P/N	Qty	Size	Termination	mm ² section	AWG section	Stripping length mm	Manual crimp tool	Crimp Die / Locator	Insertion tool	Removal tool	Guide pin
ST385 16P	14	16	solder	-	18÷16	7	-	-	-	-	-

--	--	--	--	--	--	--	--	--	--	--	--

Grommet *

Wire Outside Diameter (mm)

Size	min	max
#16	1.7	2.4

* Consult our sales office for wire specification

PAGE 3/4

ISSUE 17-10-22A

SERIES CVBS

PART NUMBER CVBS 030RA 22-19P F7

Code details

Insert material	–	Chloroprene rubber
Series	CVBS	Bayonet connector with protected mating ramps
Shell material	–	Aluminum alloy
Shell Type	030	Rear mounting receptacle connector with thread to accept backshells
Connector Class	RA	Standard backshell having an external thread suitable for MS3057...A or C type cable clamps, with waterproof O-ring, grommet and cone
Accessories	–	–
Accessories	–	–
Accessories	–	–
Insert	22-19	Arrangement 22-19
Gender Contacts	P	Pin
Polarization	–	N (0°)
Backshell Details	–	–
Contacts Termination	–	Solder
Contact Plating	–	Silver 3.5µ min
Shell Finish	F7	Black epoxy-polyurethane varnish (non conductive), RoHS compliant
Panel Gasket	–	–
Contact modification code	–	–
Customization	–	–

PAGE 4/4

ISSUE 17-10-22A

SERIES CVBS

PART NUMBER CVBS 030RA 22-19P F7

Shell type:

Bayonet connector with protected mating ramps
Rear mounting receptacle connector with thread to accept backshells

Reference Documents:

- Mil-DTL-5015 (where applicable)
- VG 95234 (where applicable)
- EN 60529
- European Directive 2011/65/UE (RoHS)

General features:

Arrangement: 22-19; Pin; the insert is supplied with rotation: N (0°)
Contact: n.14 size 16; Solder

Operating Temperature: -55 ÷ +125°C

IP Protection degree according EN60529: IP67 or IP68 (10meters 12hours, according to the application, connector series and shell type)

Insulating rubber parts: Chloroprene rubber

Connector supplied with:

- Standard backshell having an external thread suitable for MS3057...A or C type cacle clamps, with waterproof O-ring, grommet and cone

Electrical specifications:

Nominal Voltage: 700 Vdc / 500 Vac (service A)

Test Voltage: 2000 Vac

Current Rating, single contact:

- maximum current: 22A (#16) with ambient temperature 20°C
- rated current: 13A (#16) with ambient temperature 80°C

COMPONENTS	MATERIALS	PLATING / FINISHES	ACCESSORIES (included)		
Shells	Aluminum alloy	Black epoxy-polyurethane varnish (non conductive), RoHS compliant	P/N	Description	Quantity
Insulating	Chloroprene rubber	-	-	-	-
Contacts	Copper alloy	Silver 3.5µ min	-	-	-
Panel Gasket	-	-	-	-	-
Others part	-	-	-	-	-

PACKAGING

Quantity	Type	Weight
1	Plastic Bags	-
-	Carton Box	-