
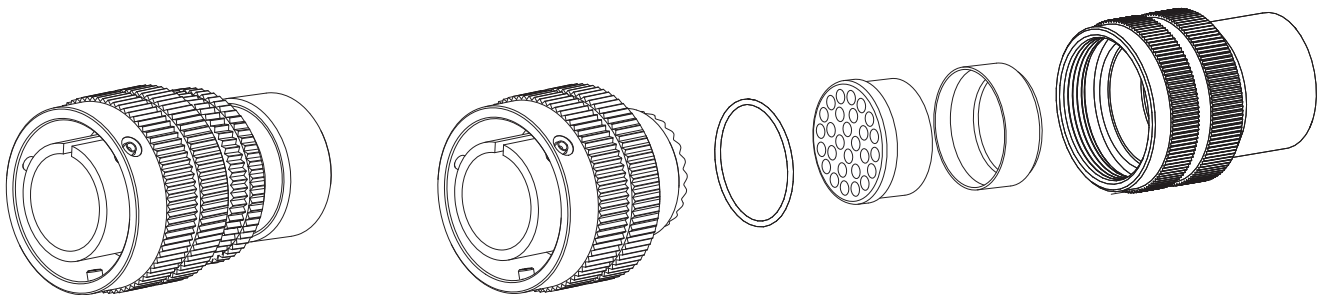


PAGE 1/4

ISSUE 14-07-21A

SERIES RF CVBS

PART NUMBER RF CVBS 06RA 14S-2S M16 LC F7

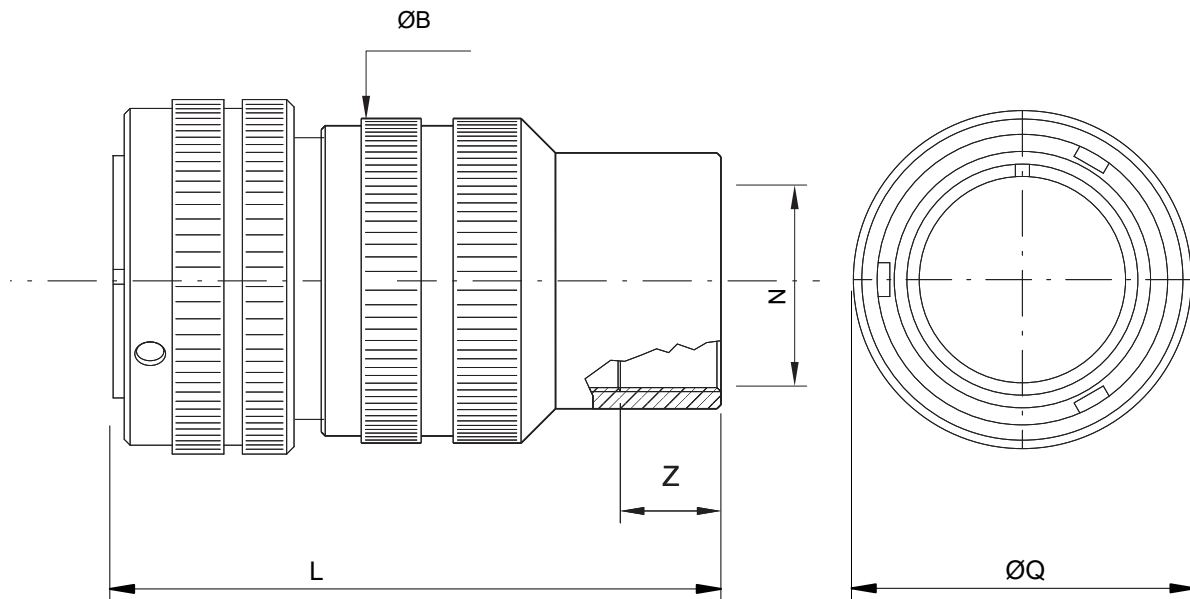

Shell size	$\varnothing Q$ ± 0.2	$\varnothing B$ ± 0.2	L max	Z min	N Backshell Metric Thread
14S	29.5	24	50	9	M16

Dimensions in mm

Dimension "L" can be different from the value indicated according to backshells accessories, wires size and some special insert configurations.


PAGE 2/4

ISSUE 14-07-21A

SERIES RF CVBS

PART NUMBER RF CVBS 06RA 14S-2S M16 LC F7

Inserts



Arrangement 14S-2

Gender Socket

No. of contacts 4


Contacts size N° 4 x #16S (22A Max)

Service Rating I (250Vdc - 200Vac)

Rotation N (0°)

Contacts P/N	Qty	Size	Termination	mm ² section	AWG section	Stripping length mm	Manual crimp tool	Crimp Die / Locator	Insertion tool	Removal tool	Guide pin
-	-	-	-	-	-	-	-	-	-	-	-

Grommet *



* Consult our sales office for wire specification

PAGE 3/4

ISSUE 14-07-21A

SERIES RF CVBS

PART NUMBER RF CVBS 06RA 14S-2S M16 LC F7

Code details

Insert material	RF	Fire behaviour (fire and smoke) complying with EN 45545-2, NFPA130 (ASTME162, ASTME662, BSS7239)
Series	CVBS	Bayonet connector with protected mating ramps
Shell material	–	Aluminum alloy
Shell Type	06	Plug connector for straight backshell, with coupling nut
Connector Class	RA	Backshell with waterproof o-ring, grommet and cone. Internal Metric thread M16
Accessories	–	-
Accessories	–	-
Accessories	–	-
Insert	14S-2	Arrangement 14S-2
Gender Contacts	S	Socket
Polarization	–	N (0°)
Backshell Details	M16	Internal Metric thread M16
Contacts Termination	LC	Less contacts (to be purchased separately)
Contact Plating	–	-
Shell Finish	F7	Black epoxy-polyurethane varnish (non conductive), RoHS compliant
Panel Gasket	–	-
Contact modification code	–	-
Customization	–	-

PAGE 4/4

ISSUE 14-07-21A

SERIES RF CVBS

PART NUMBER RF CVBS 06RA 14S-2S M16 LC F7

Shell type:

Bayonet connector with protected mating ramps
Plug connector for straight backshell, with coupling nut

Reference Documents:

- Mil-DTL-5015 (where applicable)
- VG 95234 (where applicable)
- EN 60529
- EN45545-2, NFPA130 (ASTME162, ASTME662, BSS7239)
- European Directive 2011/65/UE (RoHS)

General features:

Arrangement: 14S-2; Socket; the insert is supplied with rotation: N (0°)
Contact: n.4 size 16S; Less contacts (to be purchased separately)

Operating Temperature: -55 ÷ +150°C

IP Protection degree according EN60529 (mated connectors with adequate accessories): IP67 or IP68 (10meters 12hours, according to the application, connector series and shell type)

Insulating rubber parts: Fire behaviour (fire and smoke) complying with EN 45545-2, NFPA130 (ASTME162, ASTME662, BSS7239)

Connector supplied with:

- Backshell with waterproof o-ring, grommet and cone. Internal Metric thread M16

Electrical specifications:

Nominal Voltage: 250 Vdc / 200 Vac (service I)

Test Voltage: 1000 Vac

Current Rating, single contact:

- maximum current: 22A (#16S) with ambient temperature 20°C
- rated current: 13A (#16S) with ambient temperature 80°C

COMPONENTS	MATERIALS	PLATING / FINISHES	ACCESSORIES (included)		
			P/N	Description	Quantity
Shells	Aluminum alloy	Black epoxy-polyurethane varnish (non conductive), RoHS compliant	-	-	-
Insulating	Fire behaviour (fire and smoke)	-	-	-	-
Contacts	-	-	-	-	-
Panel Gasket	-	-	-	-	-
Others part	-	-	-	-	-

* Insulating Class parts: fire behaviour (fire and smoke) complying with EN 45545-2
Par. 4.3.1 (< 10 g), NFPA130 Par. 8.4.1.10 (< 100 cm²)

PACKAGING

Quantity	Type	Weight
1	Plastic Bags	-
-	Carton Box	-